



a) Part as supplied

202A111-*G06

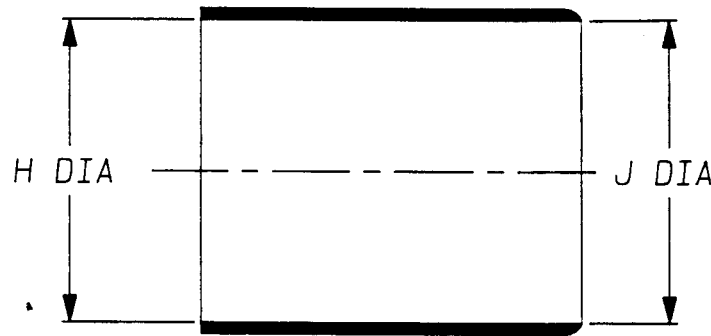

b) Part after unrestricted recovery

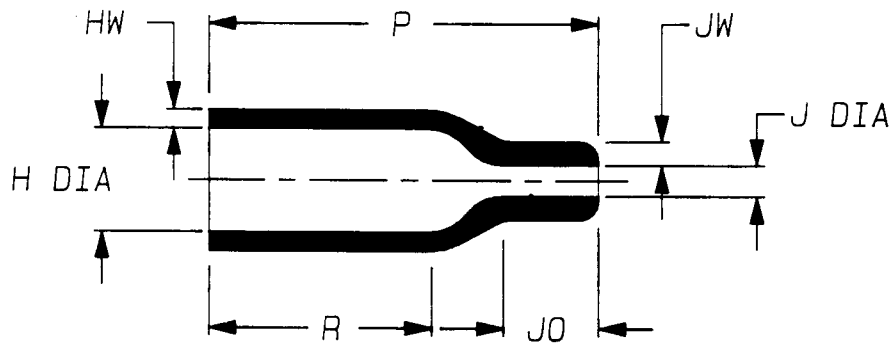

DIMENSIONS (in millimetres)

Part No.	H		J		P	R	J0	JW	HW
	Min	Max	Min	Max	±10%	±10%	±10%	±20%	±20%
	a	b	a	b	b	b	b	b	b
202A111-*G06	16	7.9	16	2.2 #	25	14	6.0	1.7 #	1.0

THIS VARIANT HAS A REDUCED "J" DIA
MODIFIED DIMENSIONS ARE SHOWN THUS: - #

Copyright (!)
Urheberrechte

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.


Drawn A.LILLEY. Checked *[Signature]* Issue 1 Date November 1997 Conforms to ISO Recommendations

Approval
Design *[Signature]*

MKTG.
[Signature]


G.A.
[Signature] 26/4/97

3rd Angle Projection
Not to Scale



Iss. Date E.C.R. Details of Change
 No.

Ordering Information

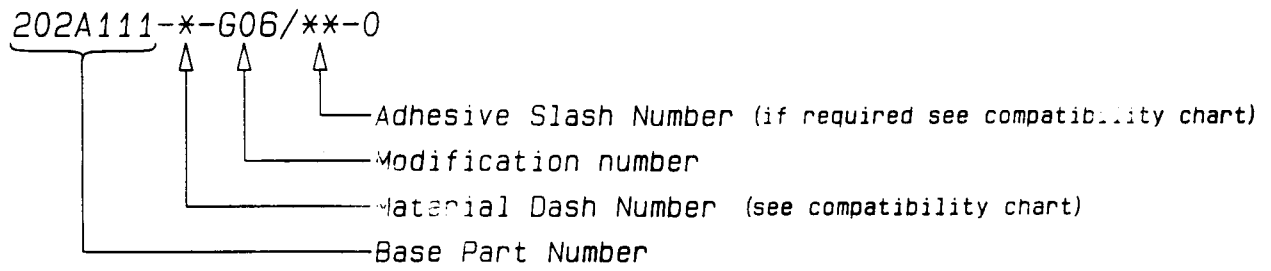

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42 , /86
-4	POLYOLEFIN, FLEXIBLE	/42 , /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923