

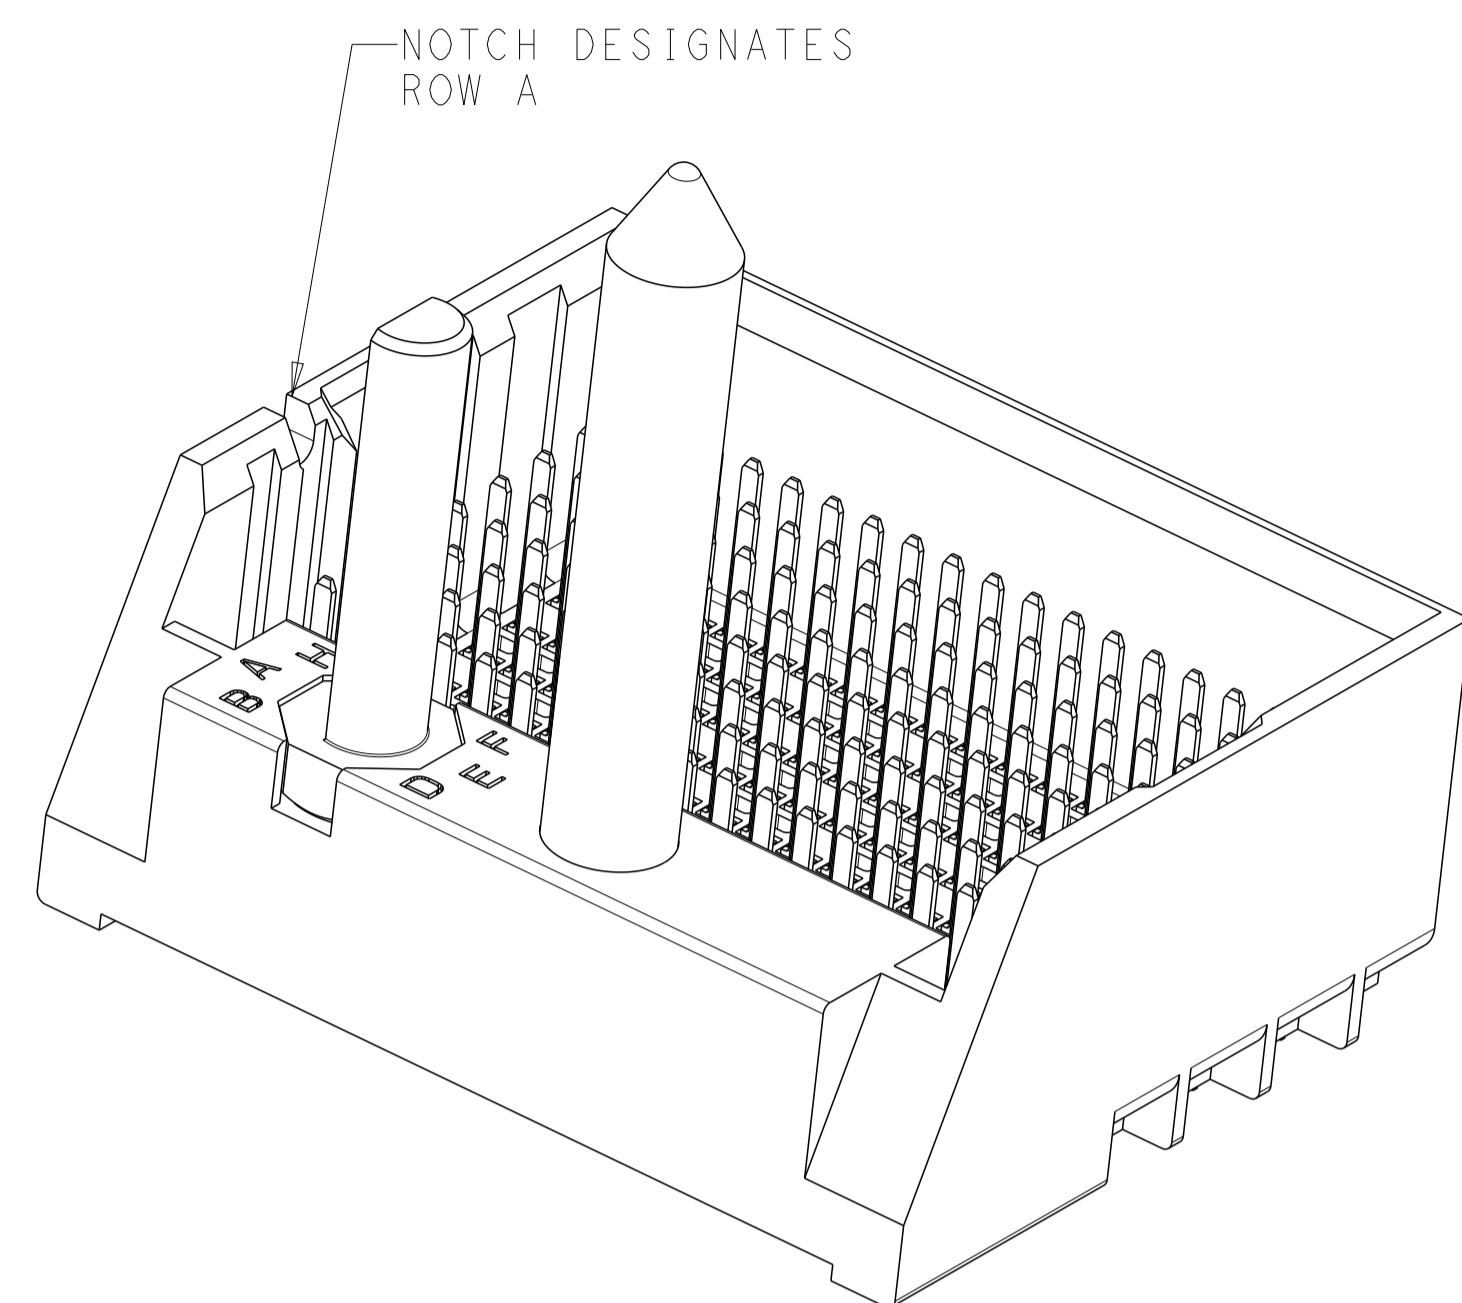
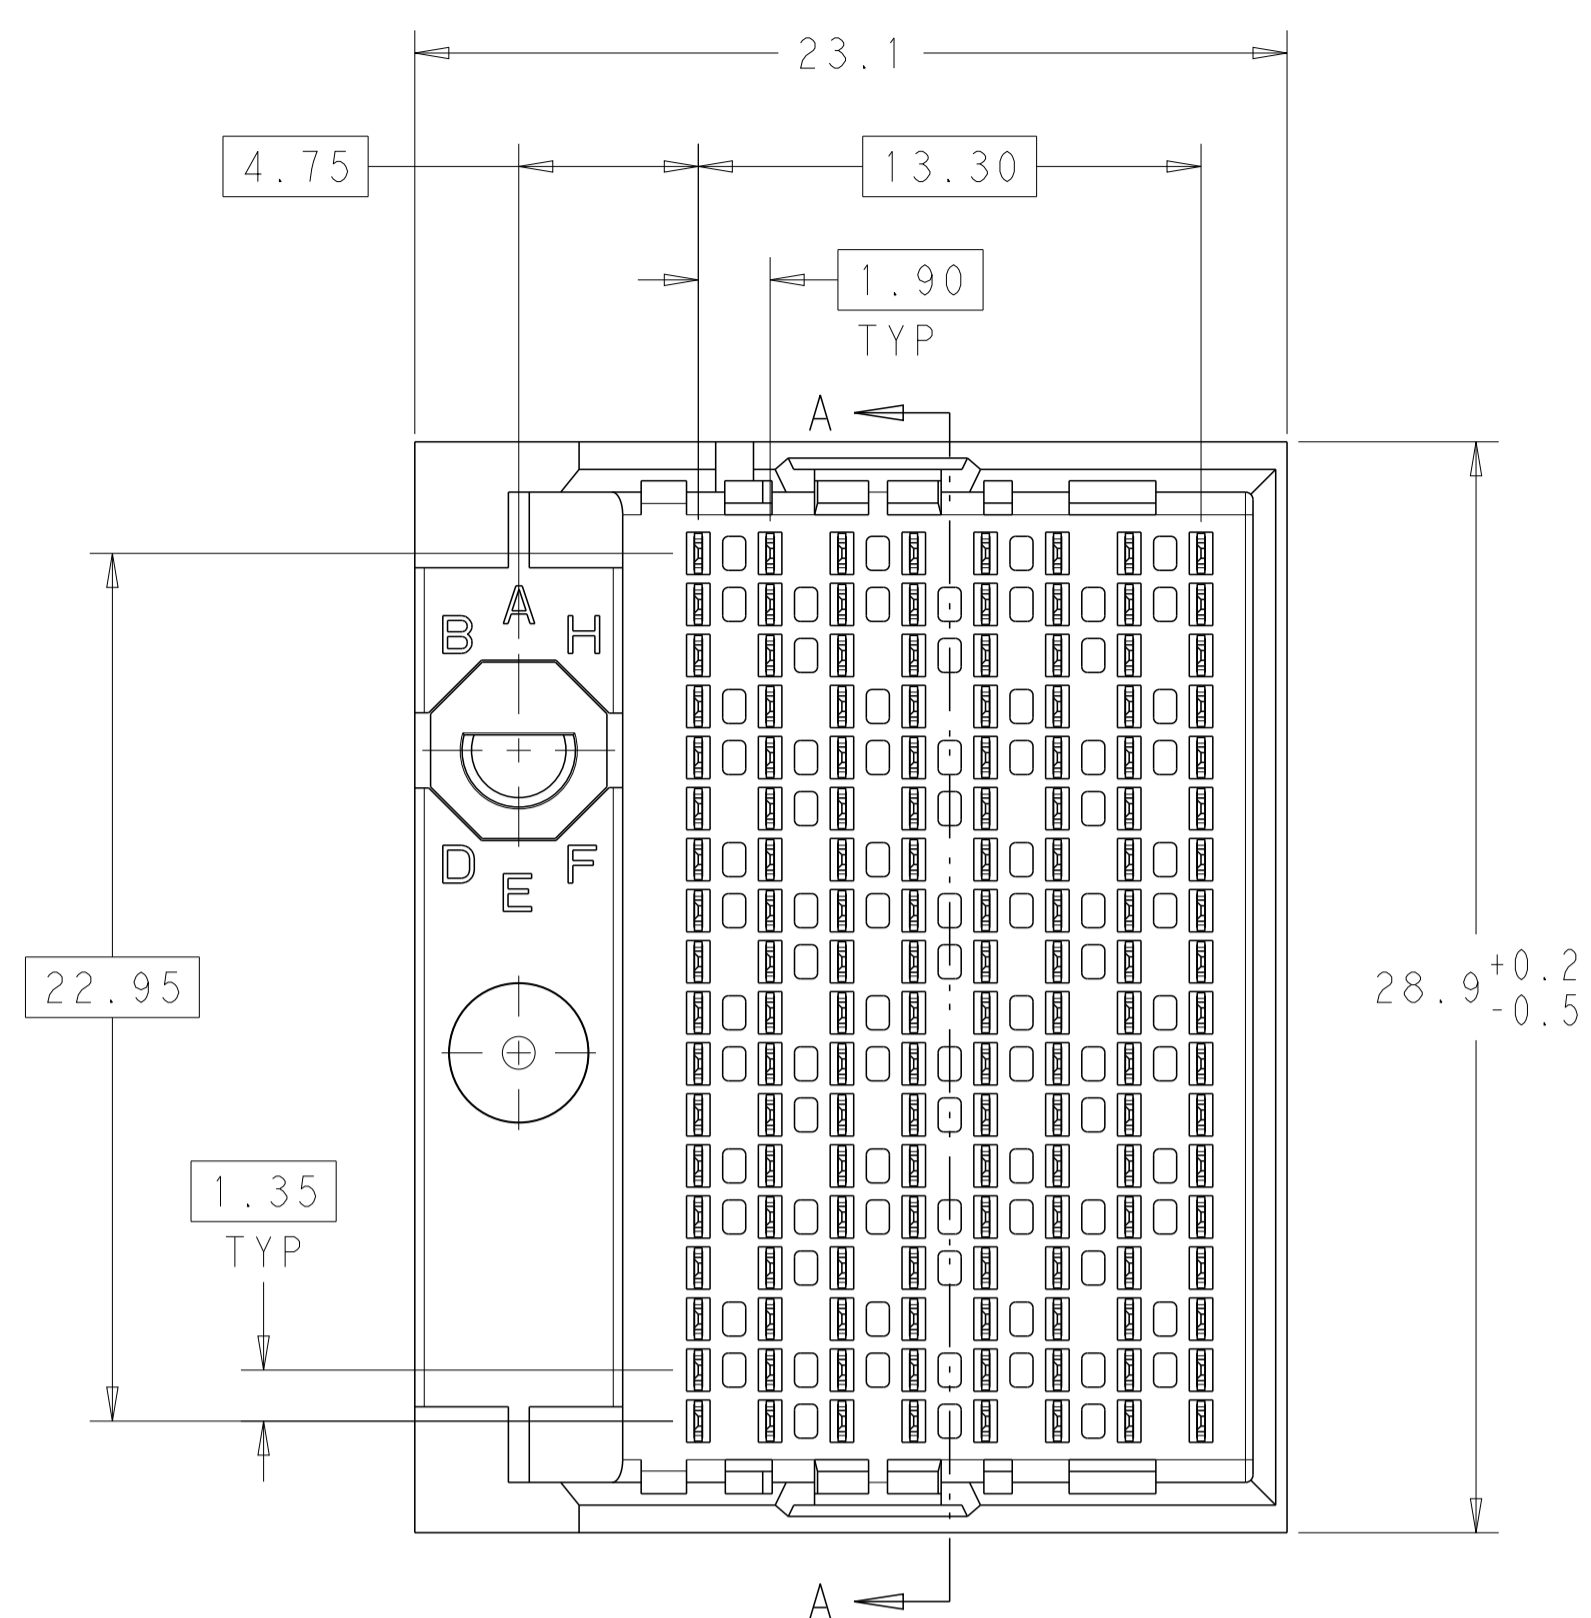
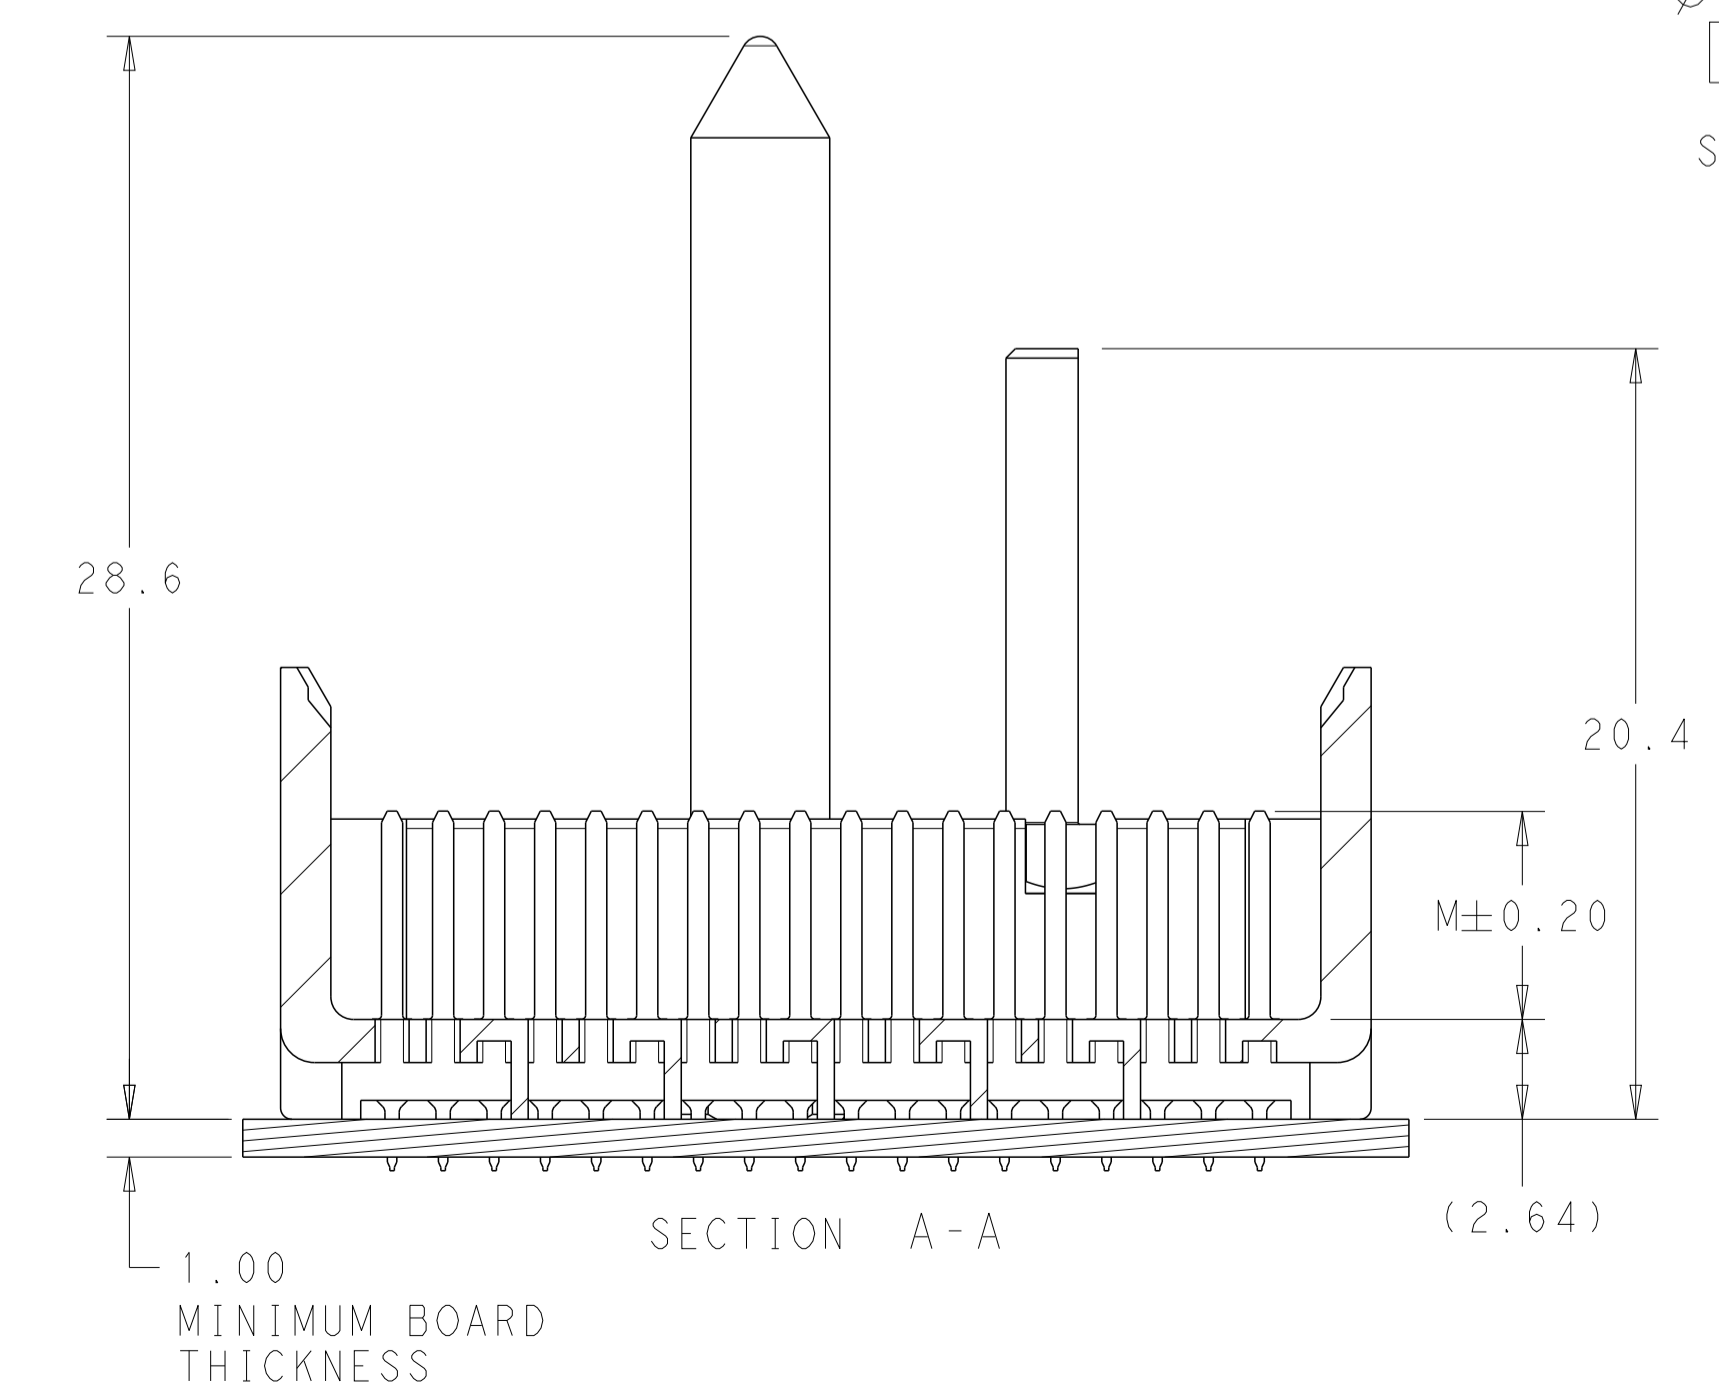


LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD
A		CREATED BY AUTOMATION PROGRAM	09JUN2011	RKC	JE

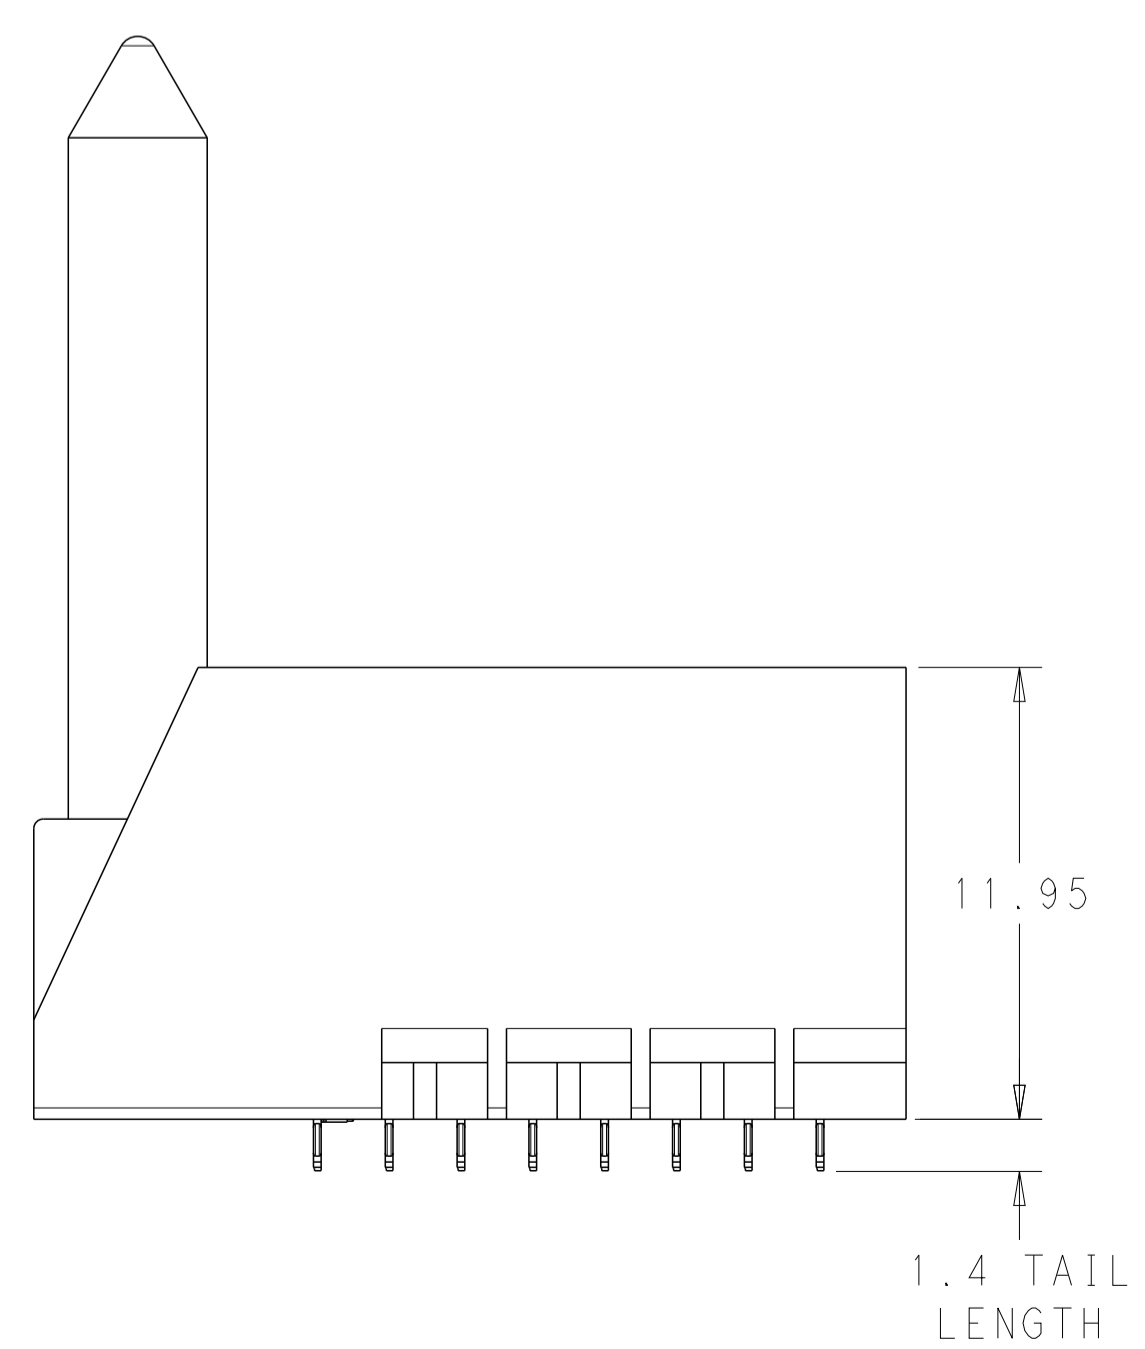

- 1. MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2. FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3. FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
- 4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5. FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH, Ø3.66 DRILL, AND Ø6.5 PAD.
- 6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

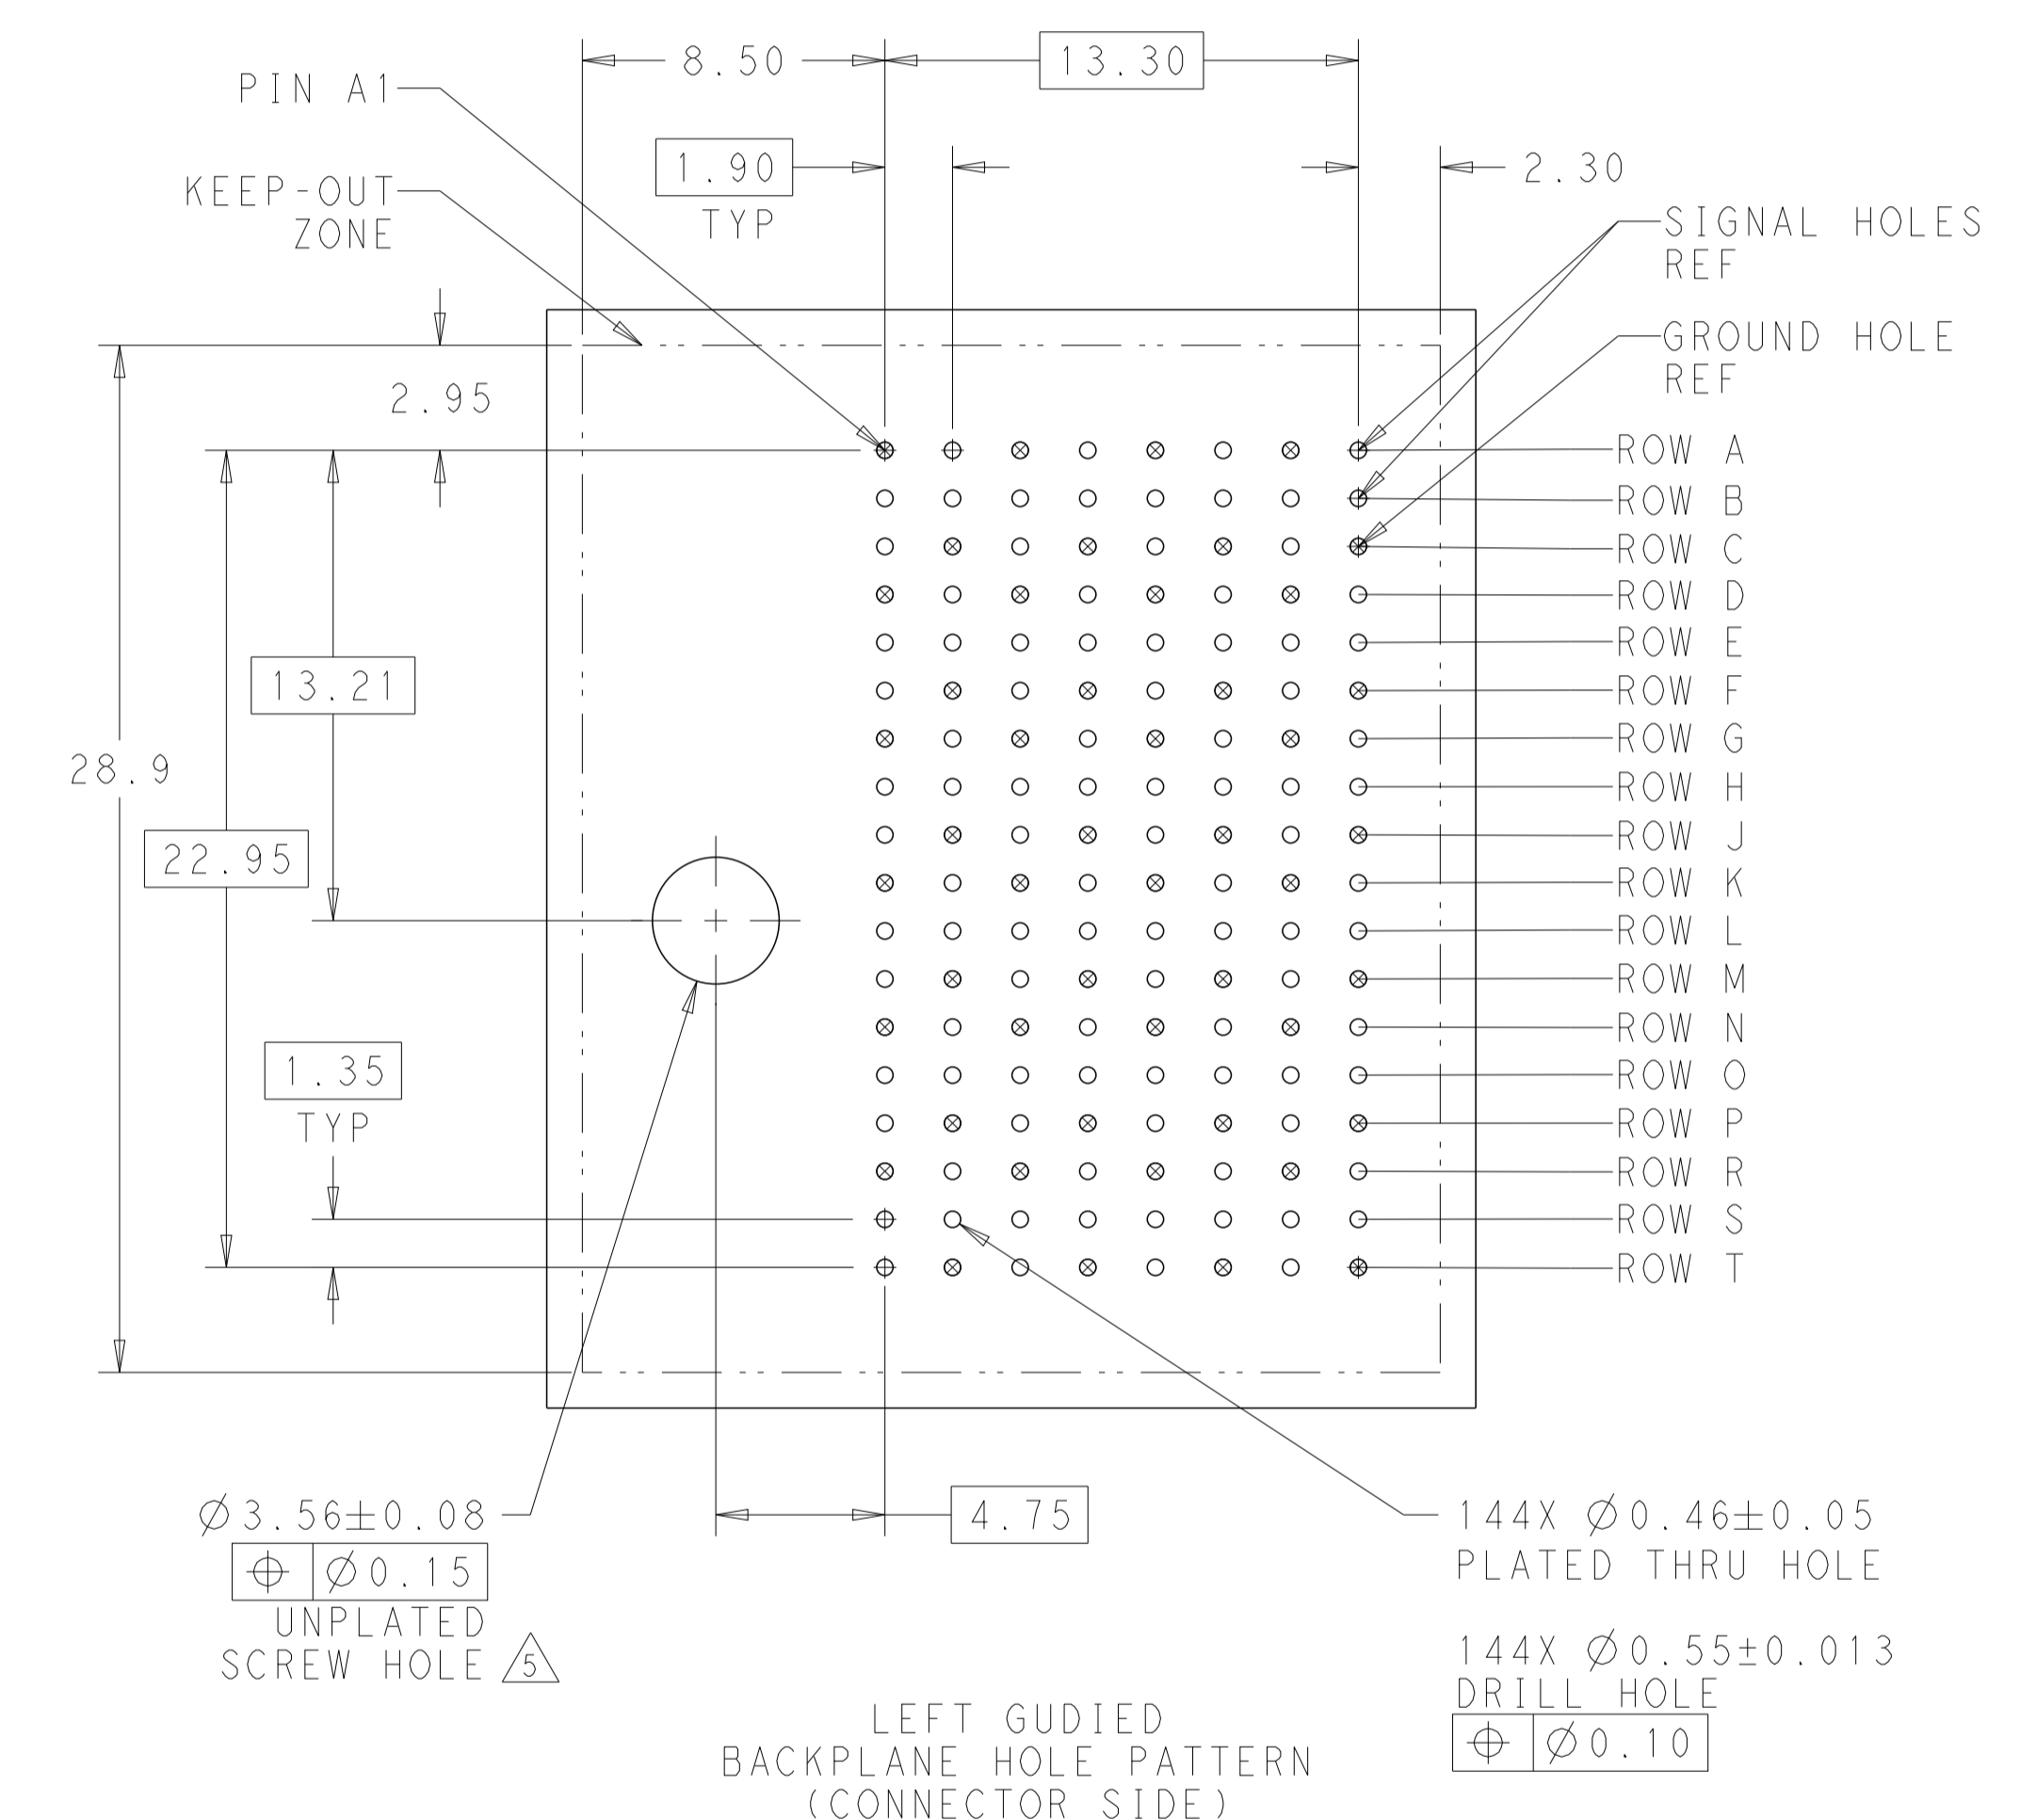


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COELLO 07JUN2011	TE Connectivity
DIMENSIONS: mm		CHK J. EARY 07JUN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EARY 07JUN2011	
0 PLC ± 1 PLC ±0.25 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH SEE TABLE		NAME IMPACT, 6 PAIR, 8 COLUMN, HEADER LEFT GUIDED, RIGHT END WALL SIGNAL MODULE, 0.46 PTH PRODUCT SPEC APPLICATION SPEC SIZE CAGE CODE DRAWING NO. RESTRICTED TO A100779C=2057786 WEIGHT CUSTOMER DRAWING	
SCALE 5:1		SHEET 1 OF 2	REV A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	P	LYR	DESCRIPTION	DATE	DNW	APVD
AD	00	-	-	SEE SHEET 1	-	-	-

3	H	5.5	8-2057786-6
3	H	4.9	8-2057786-5
3	H	4.5	8-2057786-4
2	H	5.5	8-2057786-3
2	H	4.9	8-2057786-2
2	H	4.5	8-2057786-1
3	G	5.5	7-2057786-6
3	G	4.9	7-2057786-5
3	G	4.5	7-2057786-4
2	G	5.5	7-2057786-3
2	G	4.9	7-2057786-2
2	G	4.5	7-2057786-1
3	F	5.5	6-2057786-6
3	F	4.9	6-2057786-5
3	F	4.5	6-2057786-4
2	F	5.5	6-2057786-3
2	F	4.9	6-2057786-2
2	F	4.5	6-2057786-1
3	E	5.5	5-2057786-6
3	E	4.9	5-2057786-5
3	E	4.5	5-2057786-4
2	E	5.5	5-2057786-3
2	E	4.9	5-2057786-2
2	E	4.5	5-2057786-1
3	D	5.5	4-2057786-6
3	D	4.9	4-2057786-5
3	D	4.5	4-2057786-4
2	D	5.5	4-2057786-3
2	D	4.9	4-2057786-2
2	D	4.5	4-2057786-1
3	C	5.5	3-2057786-6
3	C	4.9	3-2057786-5
3	C	4.5	3-2057786-4
2	C	5.5	3-2057786-3
2	C	4.9	3-2057786-2
2	C	4.5	3-2057786-1
3	B	5.5	2-2057786-6
3	B	4.9	2-2057786-5
3	B	4.5	2-2057786-4
2	B	5.5	2-2057786-3
2	B	4.9	2-2057786-2
2	B	4.5	2-2057786-1
3	A	5.5	1-2057786-6
3	A	4.9	1-2057786-5
3	A	4.5	1-2057786-4
2	A	5.5	1-2057786-3
2	A	4.9	1-2057786-2
2	A	4.5	1-2057786-1
3	-	5.5	2057786-6
3	-	4.9	2057786-5
3	-	4.5	2057786-4
2	-	5.5	2057786-3
2	-	4.9	2057786-2
2	-	4.5	2057786-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM FOR PRODUCT AVAILABILITY

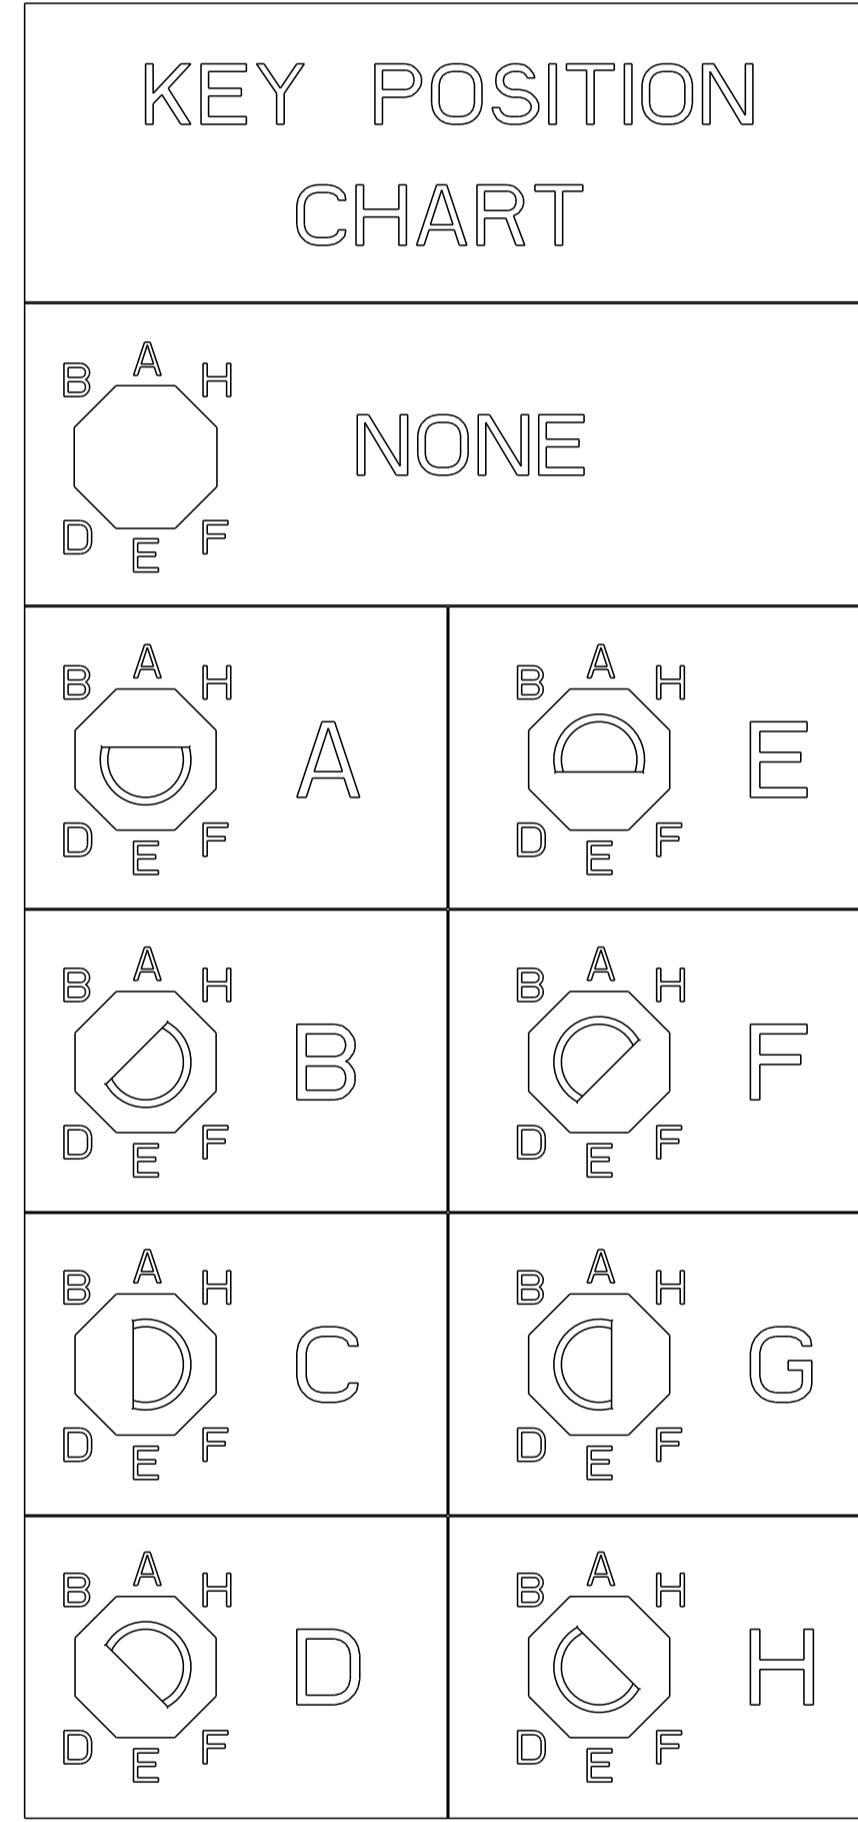

THIS DRAWING IS A CONTROLLED DOCUMENT.		DNW R. COELLO 07JUN2011	TE Connectivity
DIMENSIONS: mm		CHK J. EARY 07JUN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EARY 07JUN2011	NAME: IMPACT, 6 PAIR, 8 COLUMN, HEADER LEFT GUIDED, RIGHT END WALL SIGNAL MODULE, 0.46 PTH
0 PLC ±0.25		PRODUCT SPEC	
1 PLC ±0.13		APPLICATION SPEC	SIZE: CAGE CODE DRAWING NO
2 PLC ±		WEIGHT	RESTRICTED TO
3 PLC ±		CUSTOMER DRAWING	A100779C=2057786
4 PLC ±		SCALE 5:1	SHEET 2 OF 2
ANGLES FINISH SEE TABLE		REV A	