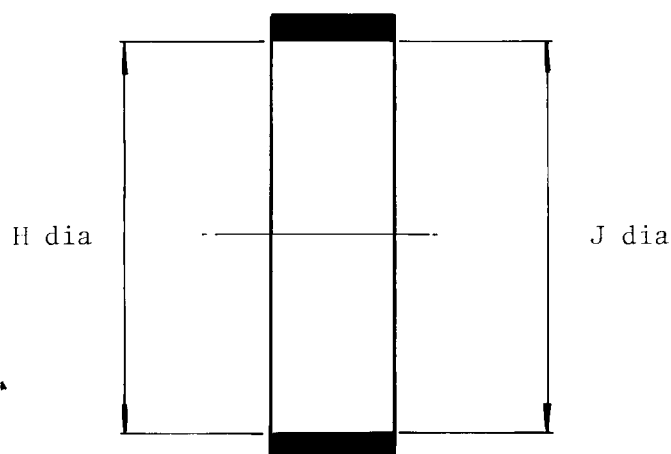
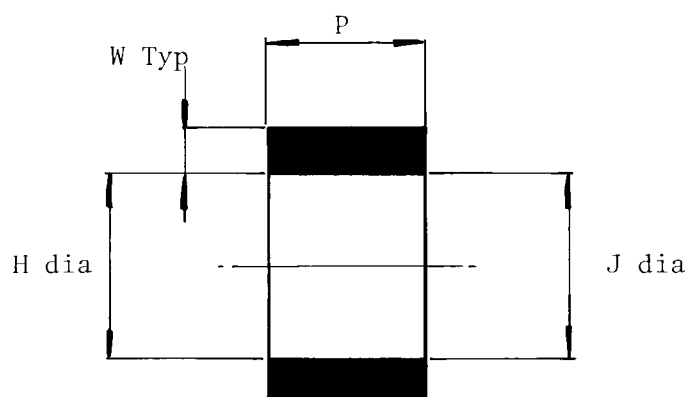


a. Part as supplied.

205W061

b. Part after unrestricted
recovery.

Dimensions (in millimetres)

Part No.	H		J		P	W
	min a	max b	min a	max b	$\pm 10\%$ b	$\pm 20\%$ b
205W061	27	12,7	27	12,7	10	3,2

Drawn by L.Ellis

Issued by L.Ellis

Checked by *Del*

Approved by


Design *Del*Mktg *PH*Q.C. *OR*

Issue 1

Date August 1979

(Ordering Information)

202W232-*/**-0

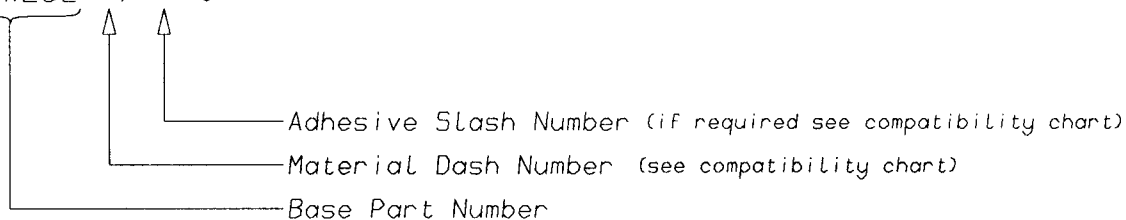

(COMPATIBILITY CHART)

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42,/86
-4	POLYOLEFIN, FLEXIBLE	/42,/86
-25	ELASTOMER, FLUID RESISTANT	/86,/225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923