
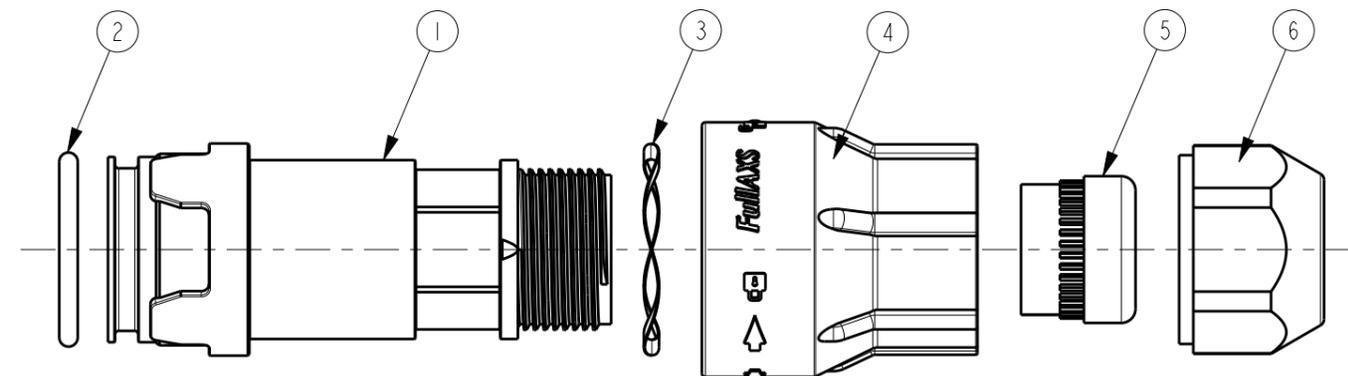
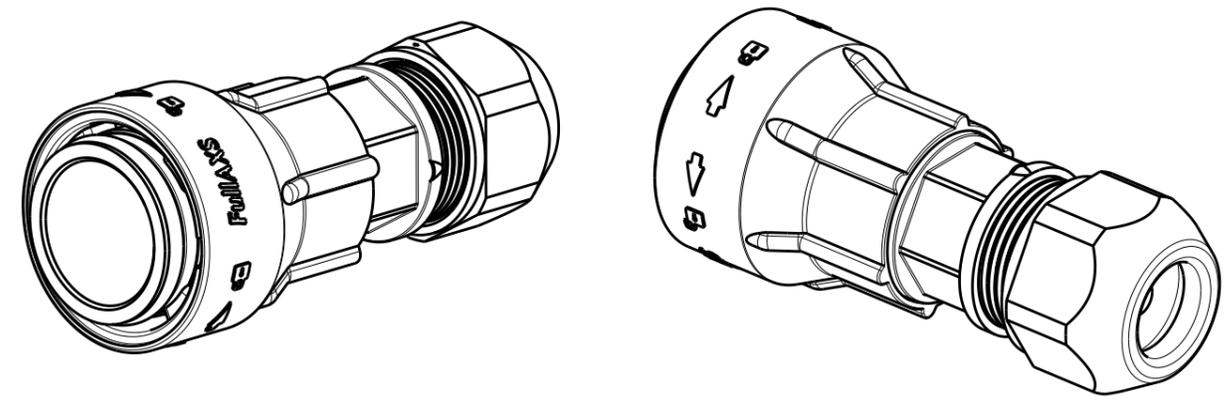



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-16-004333	10MAY2016	HZ	RS

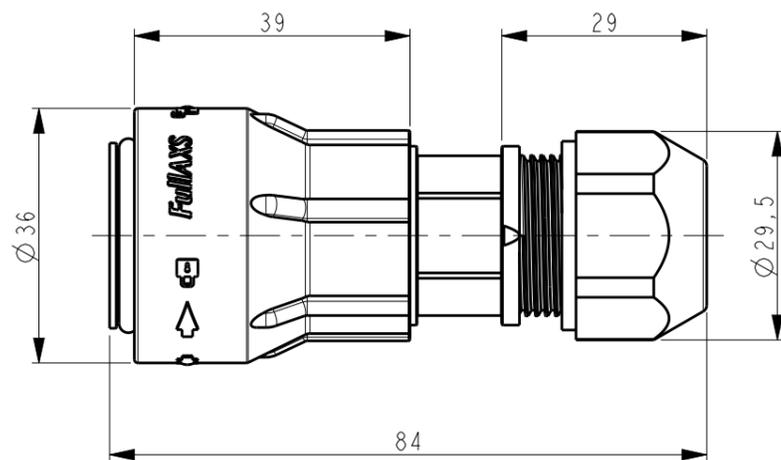

NOTES:


- 1. THIS FIELD INSTALL KIT SHOULD BE USED WITH RUGGEDIZED CABLE AND RUGGED FAN-OUT CONSTRUCTION
- 2. THE FLAMMABILITY RATING OF THE MATERIAL IS UL94-V0
- 3. THE MATERIAL IS HALOGEN FREE ACCORDING IEC 60754-2
- 4. EACH ASSEMBLY IS PACKED IN A PROTECTIVE SLEEVE
- 5. AN INSTRUCTION SHEET IS PACKED WITH EACH FIELD INSTALL KIT
- 6. CABLE DIAMETER RANGE: SEE TABLE
- 7. 2061657-4 INCLUDES THREE SEALS IN THE PACKAGING

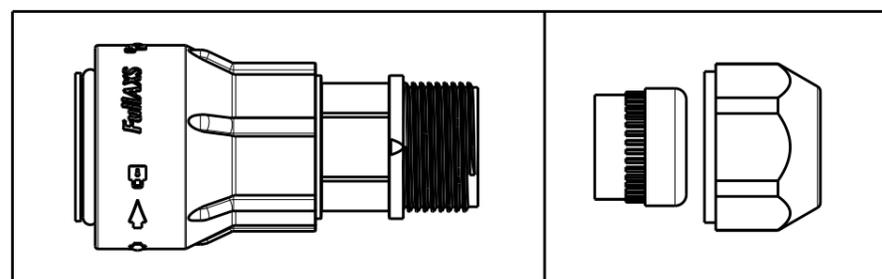

PROTECTIVE SLEEVE PACKAGING SCALE 4:5

TE Part Number	Cable Diameter
2061657-1	4.8 - 6.2 mm
2061657-2	7.3 - 9.0 mm
2061657-3	6.0 - 7.5 mm
2061657-4	4.8 - 9.0 mm

Item	Description	Qty
6	FULLAXS FIELD INSTALL NUT FOR CABLE GLAND	1
5	FULLAXS FIELD INSTALL SPLIT CABLE SEAL	1
4	FULLAXS WAVE SPRING	1
3	FULLAXS FIELD INSTALL BAYONET SHELL	1
2	FULLAXS FRONT O-RING 22.3x2.4	1
1	FULLAXS FIELD INSTALL SHORT INNER BODY	1

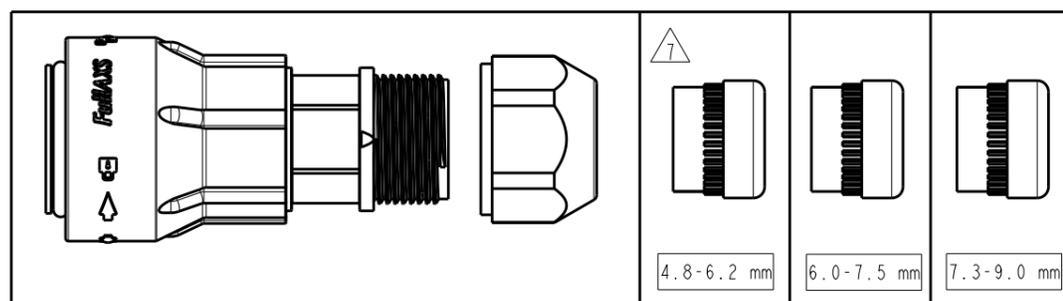

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.5
	1 PLC ±0.25
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±2
MATERIAL VARIES	FINISH BLACK

DWN	J. Verhoeven	11 APR 2012
CHK	D. CAMPSCHROER	12 FEB 2014
APVD	T. DRIJFHOUT	12 FEB 2014
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	
Customer Drawing		



FULLAXS FIELD INSTALL KIT SHORT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2061657	-
SCALE 1:1		SHEET 1 OF 1	REV B