


D


C

B



A

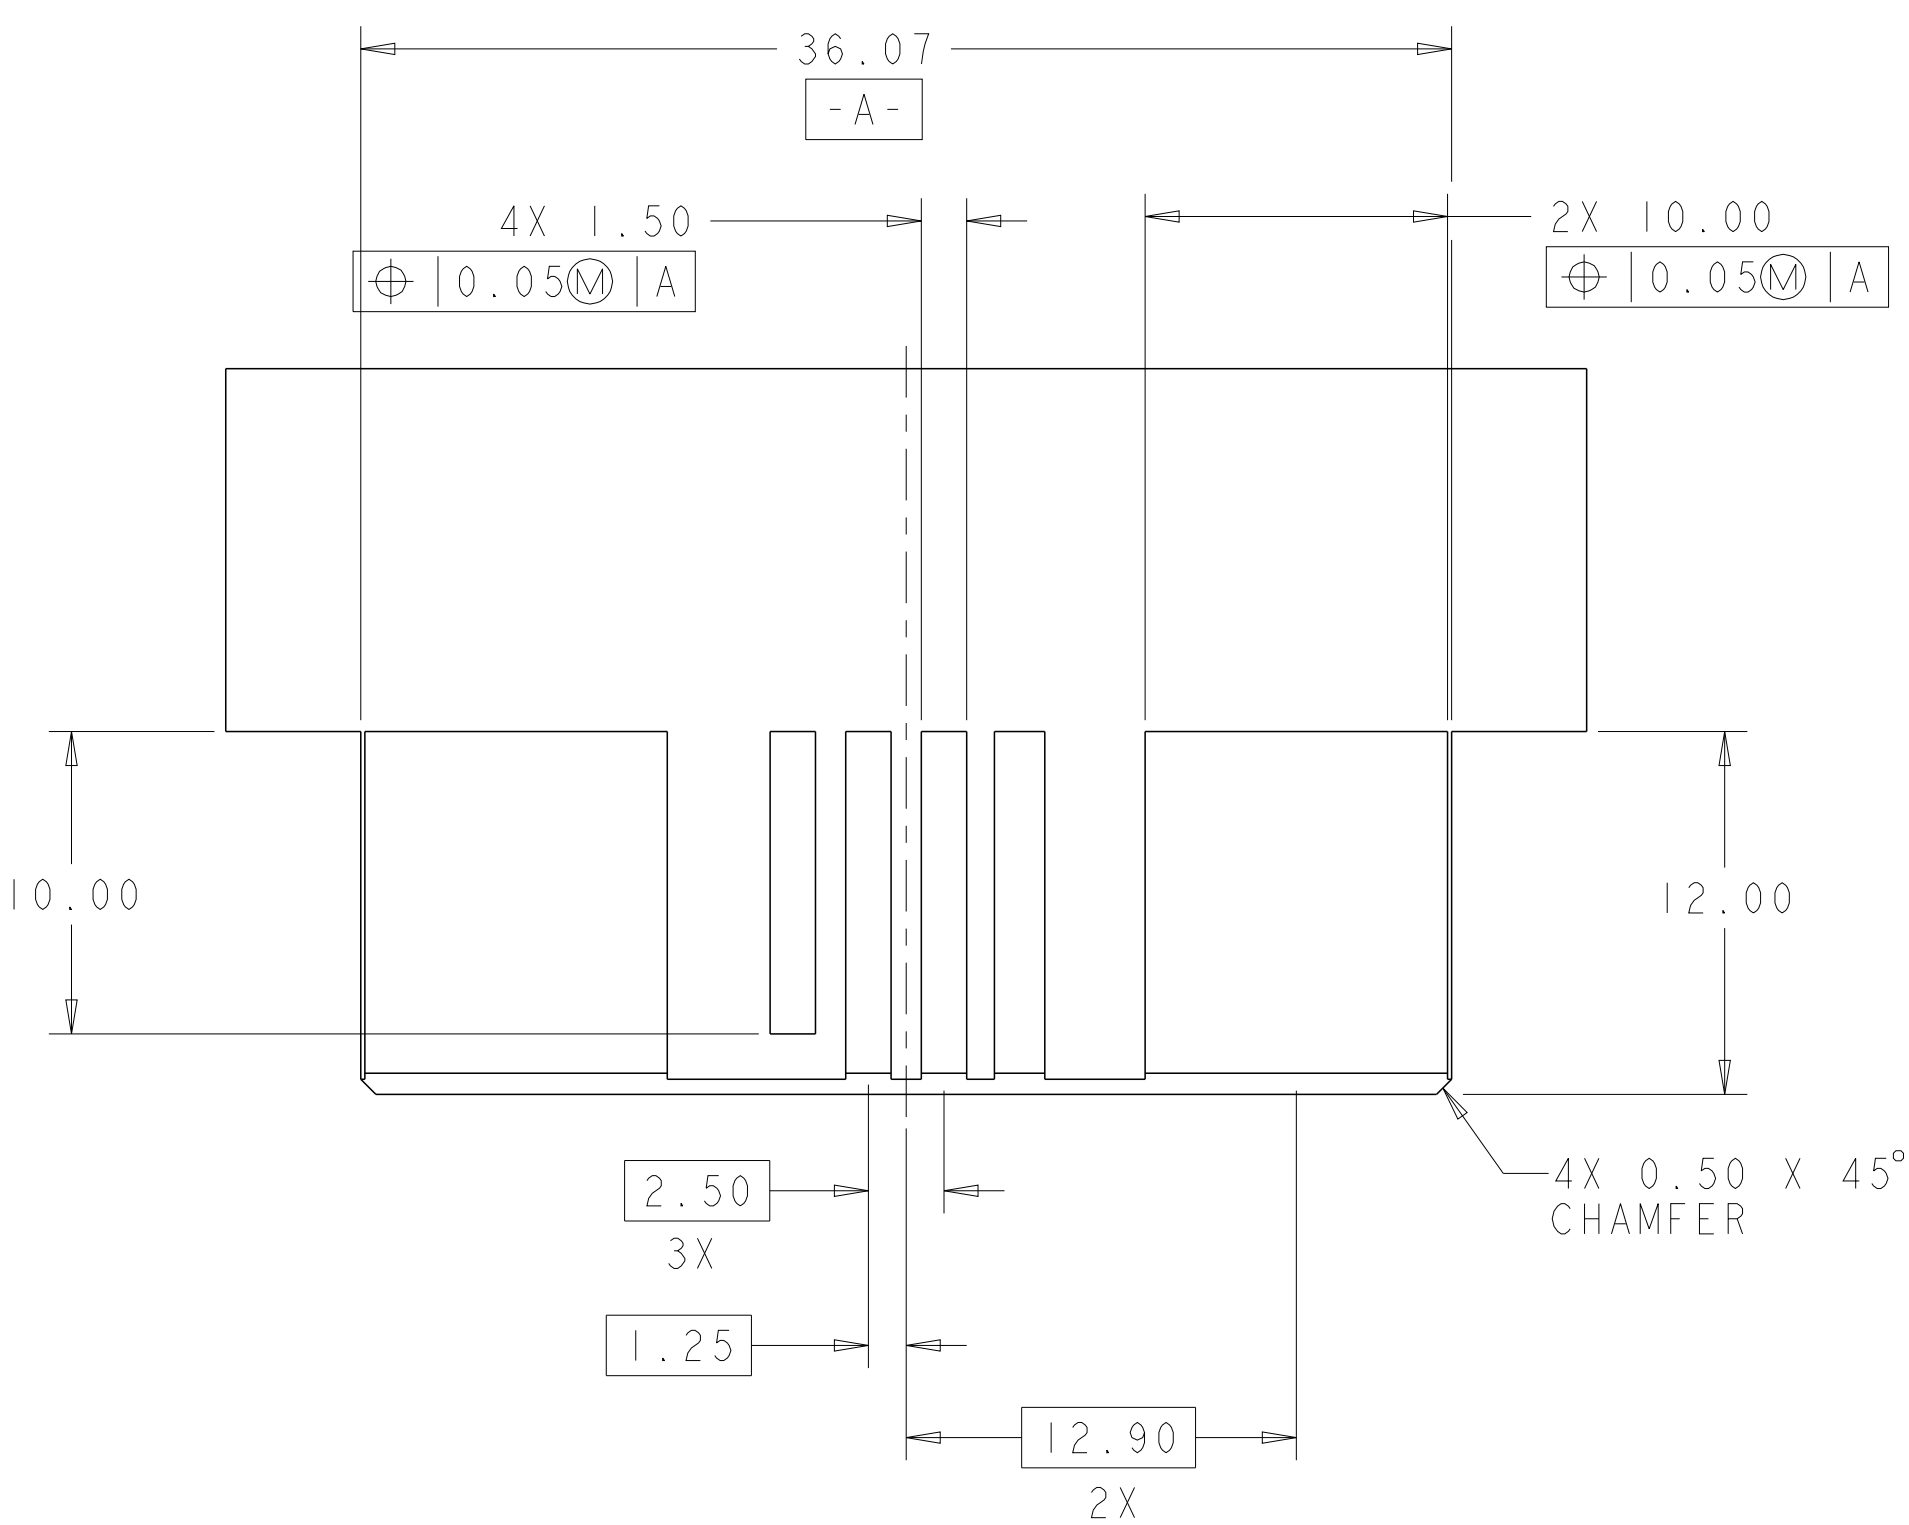


EDGE CARD LAYOUT

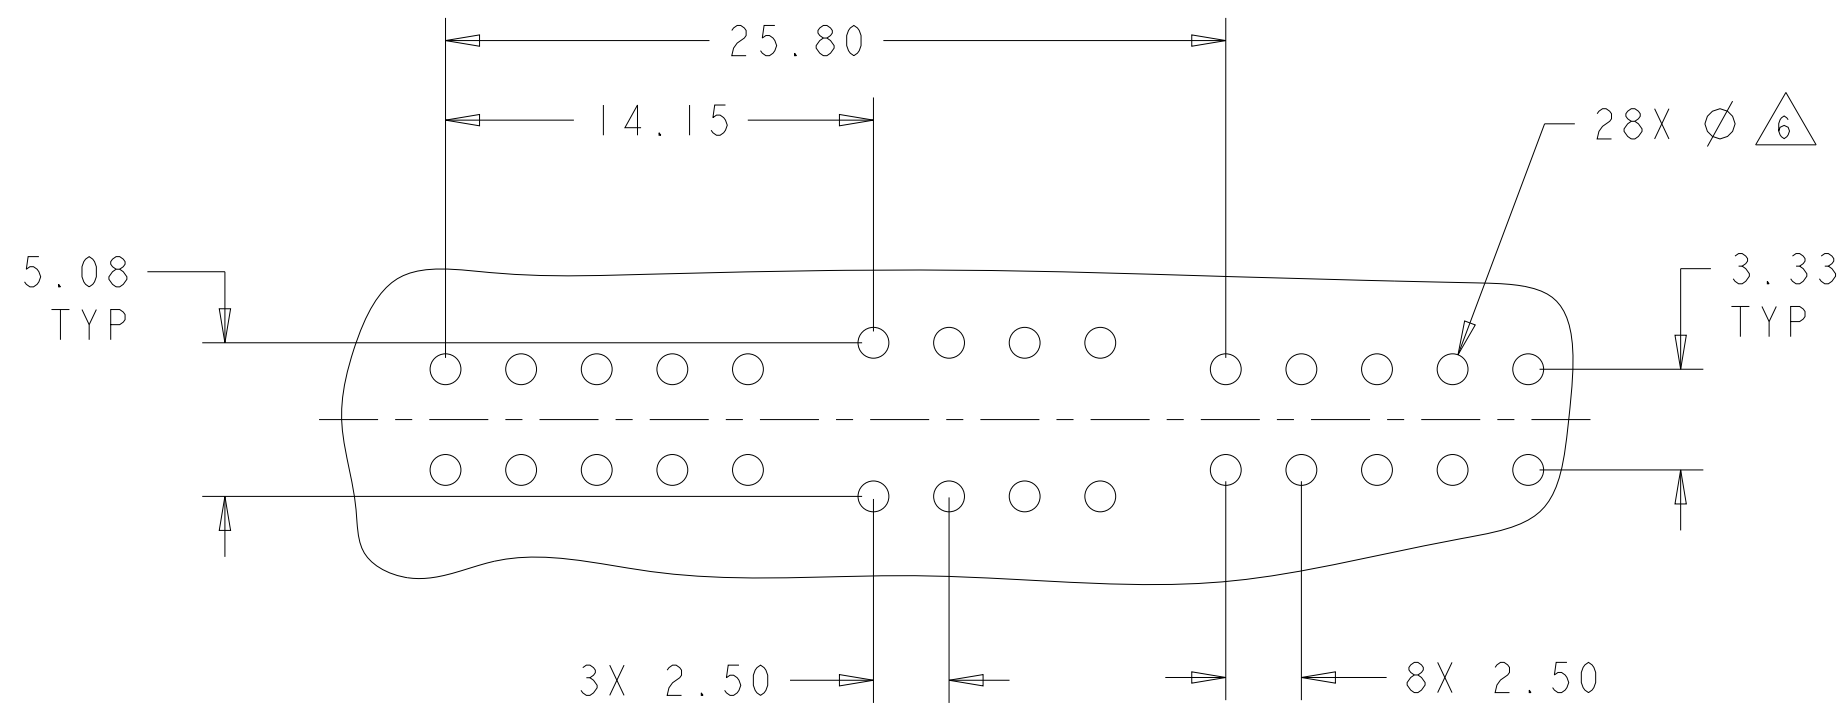

PRINTED CIRCUIT LAYOUT
COMPONENT SIDE

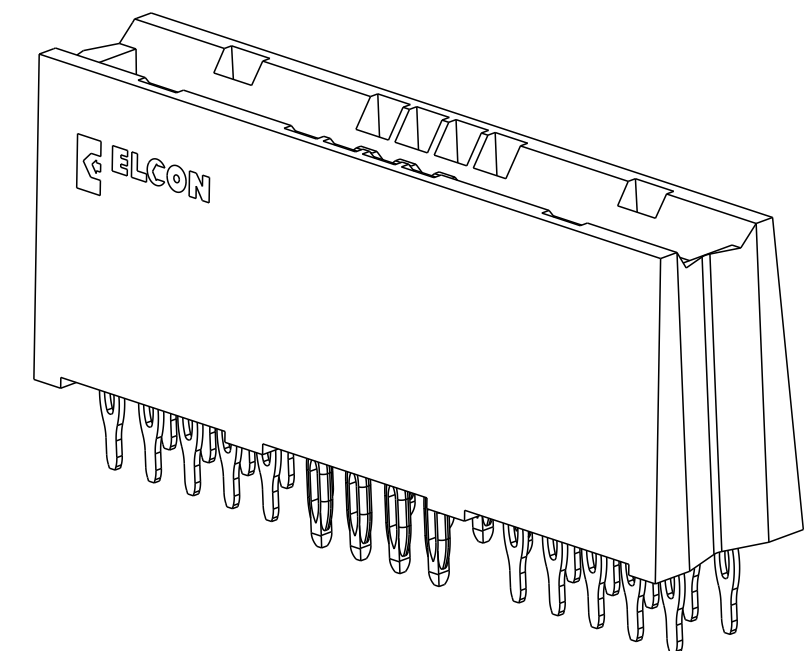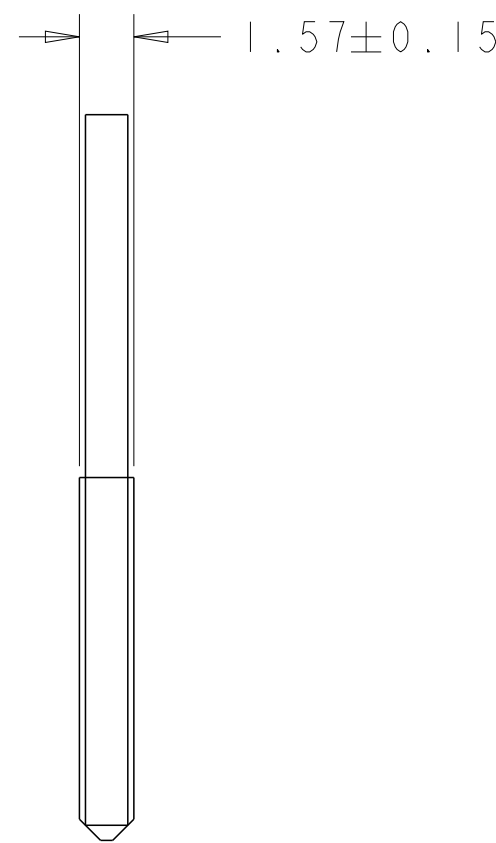

SCALE 3:1

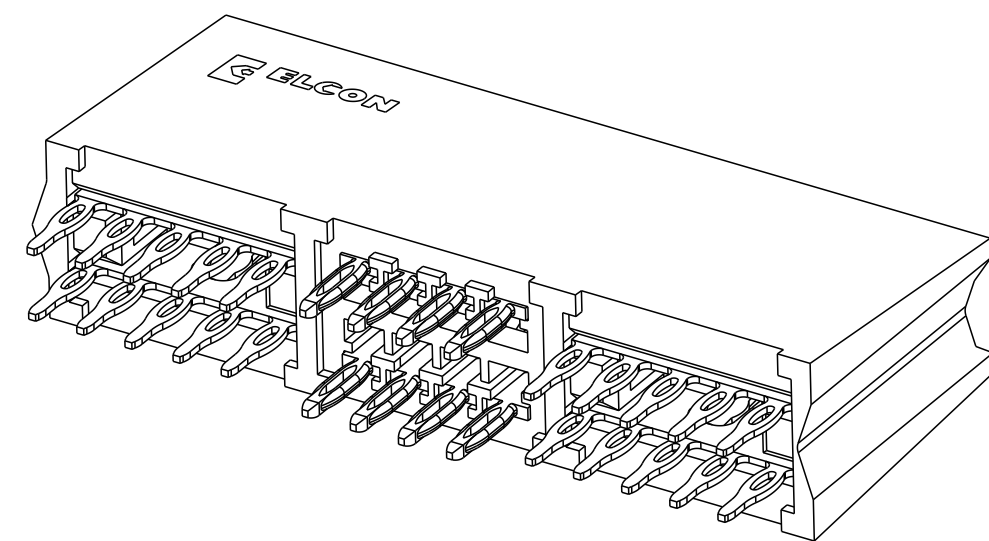

SCALE 3:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. SYKES APVD M. SYKES	16DEC2010 16DEC2010 16DEC2010	TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm .5$ 1 PLC $\pm .5$ 2 PLC $\pm .25$ 3 PLC $\pm .5$ 4 PLC $\pm .5$ ANGLES ± 5 FINISH		NAME SOCKET CONNECTOR ASSEMBLY STRAIGHT, 2P8S2P COMPLIANT TAIL, CROWNEDGE		SIZE A2	
MATERIAL -		WEIGHT -		CAGE CODE 00779		DRAWING NO C-2085657	
		Customer Drawing		SCALE 4:1		SHEET 2 OF 3	
						REV A1	


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

D


C

B

A

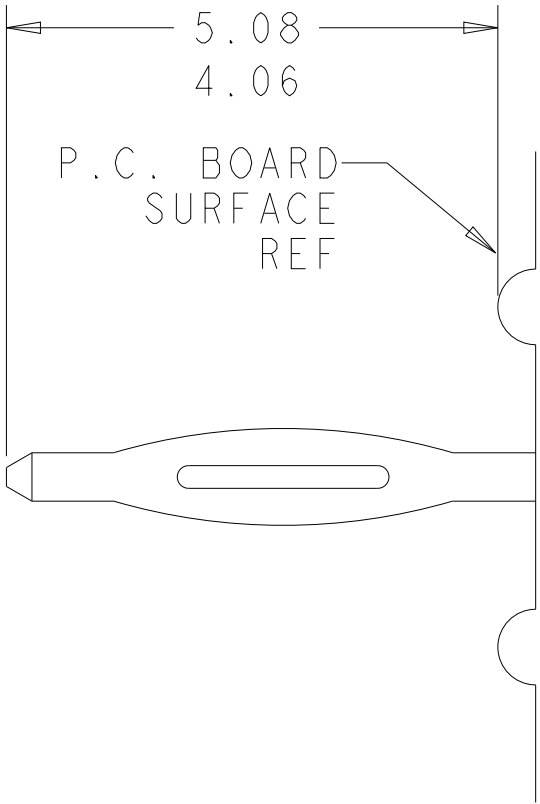

5. COMPLIANT PIN DETAIL
SCALE 10 : 1
INSERTION/EXTRACTION FORCES
MAXIMUM PUSH IN: 133.3N [30 LBS] PER PIN
MINIMUM PUSH OUT: 44.4N [10 LBS] PER PIN

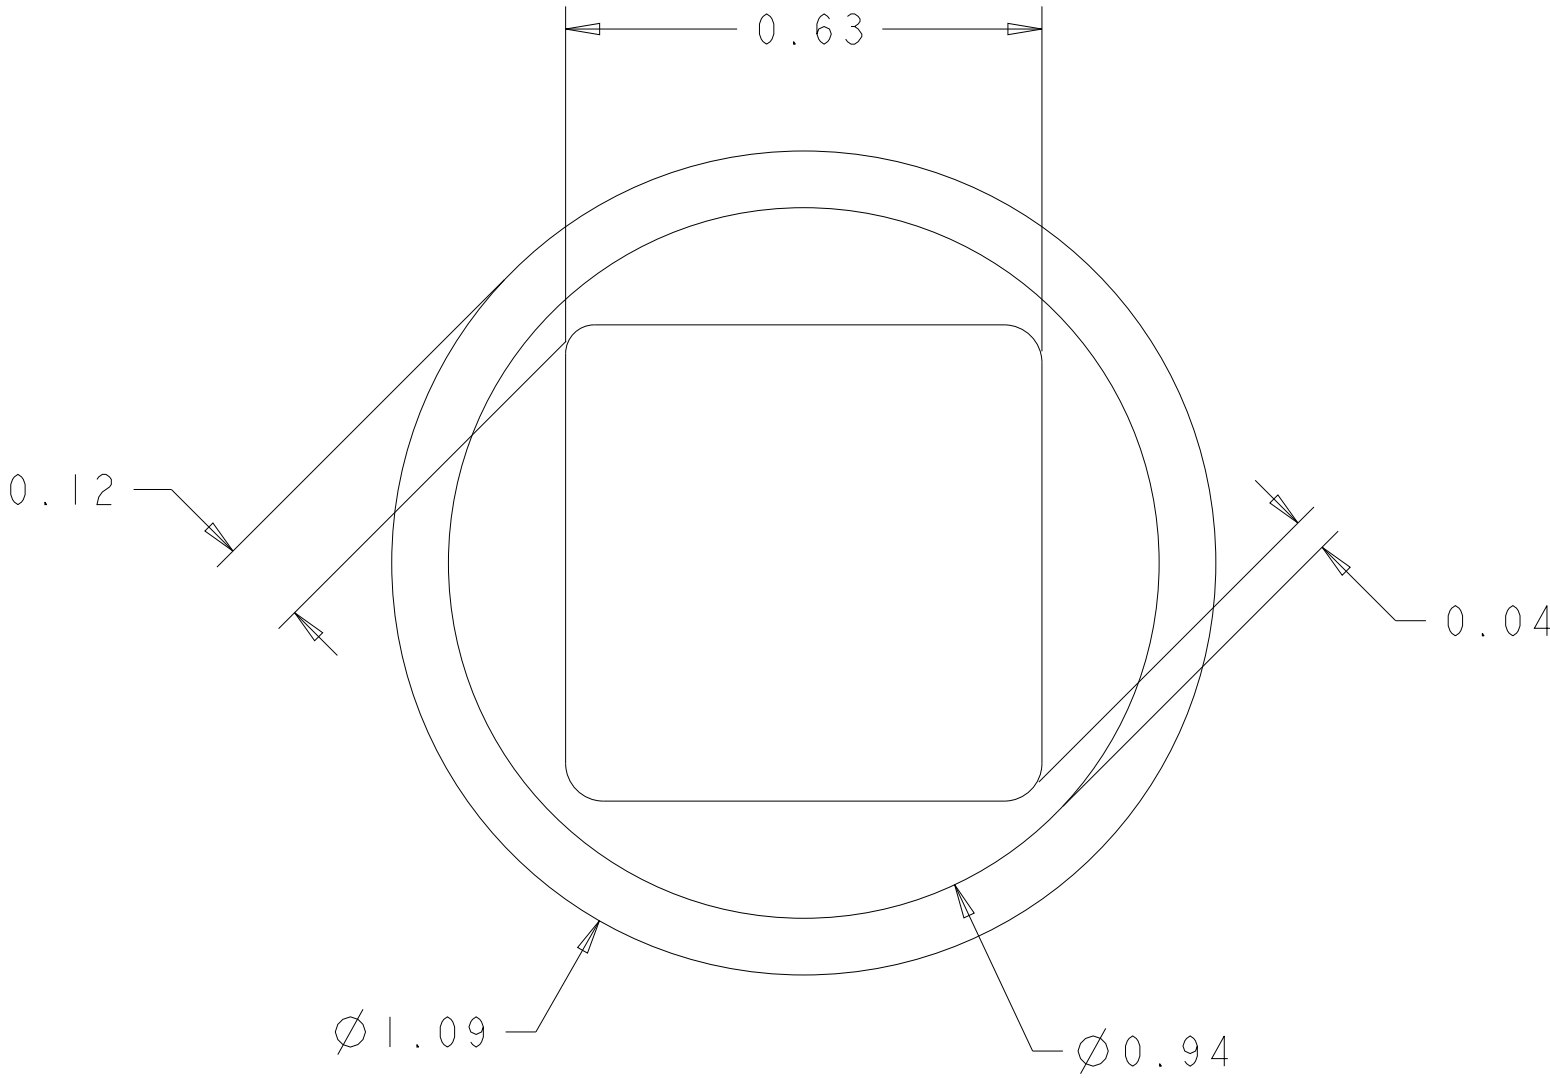

6. SOLDER TERMNIATION AREA
SCALE 40:1
RECOMMENDED PRINTED CIRCUIT SOLDER HOLE
COMPLIANT PRESS FIT
FINISHED HOLE: Ø1.02±.08
DRILLED HOLE: Ø1.15 ±.013
COPPER PLATE: .025 MIN (PER SIDE)
TIN PLATE: .0005 MIN. (PER SURFACE)

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 16DEC2010	TE Connectivity			
DIMENSIONS:		CHK M.SYKES 16DEC2010				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.SYKES 16DEC2010	NAME			
	0 PLC ±.5 1 PLC ±.5 2 PLC ±.25 3 PLC ±. 4 PLC ±. ANGLES ±5 FINISH	PRODUCT SPEC	SOCKET CONNECTOR ASSEMBLY STRAIGHT, 2P8S2P COMPLIANT TAIL, CROWNEDGE			
		APPLICATION SPEC				
MATERIAL	-	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		-	A2	00779	C-2085657	-
Customer Drawing				SCALE	SHEET	REV
				4:1	3 OF 3	A1