

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -



ALL RIGHTS RESERVED.

LOC



DIST

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO-12-007058	11APR2012	JM	-
	B	REVISED PER ECN-22162811	07JUL2022	OG	AE

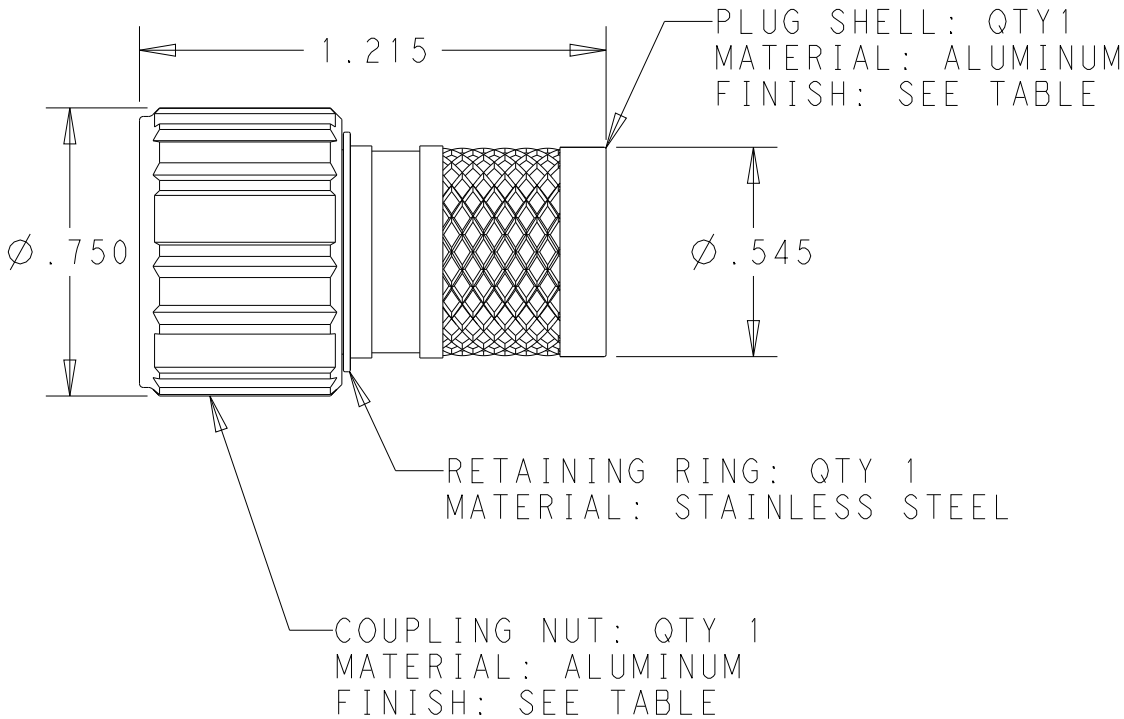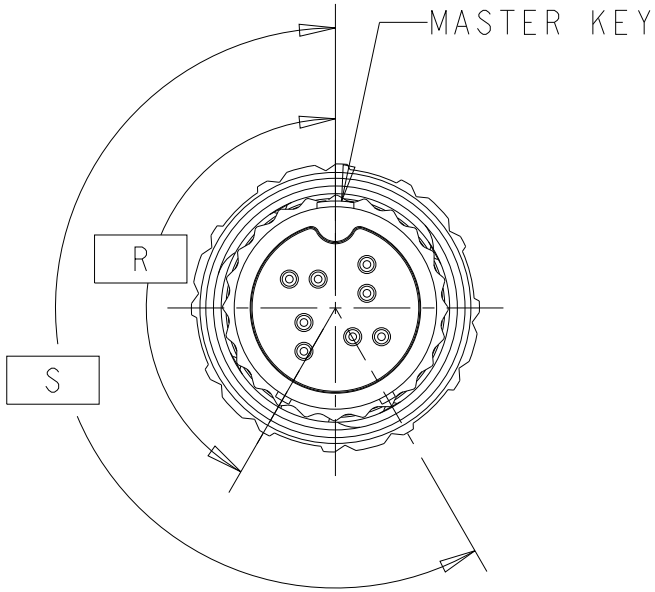

KEY POSITION	KEY ROTATION	
	"R"	"S"
NORMAL	150°	210°
A	140°	215°
B	132°	248°

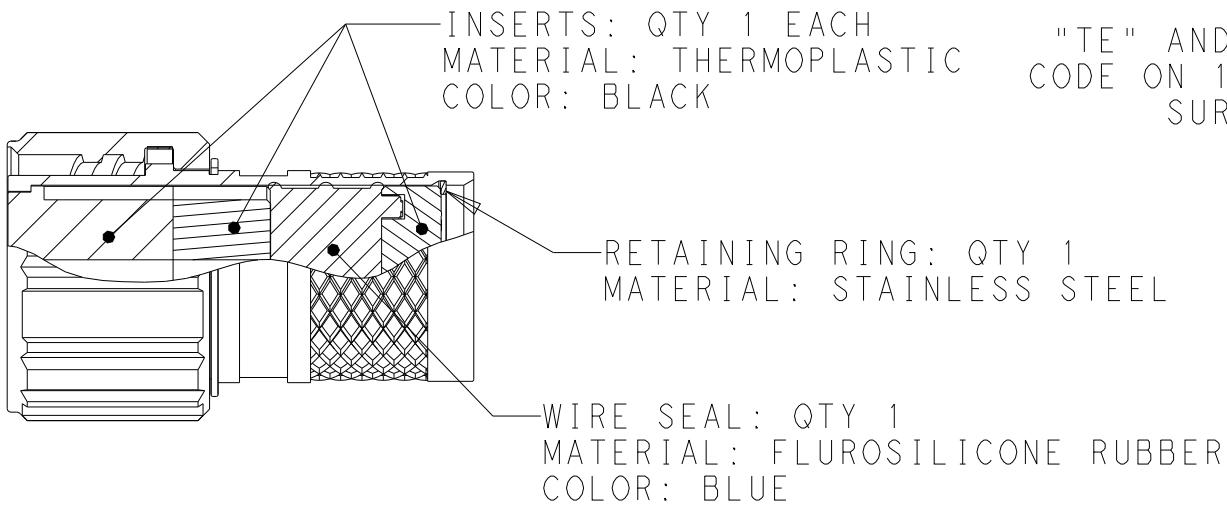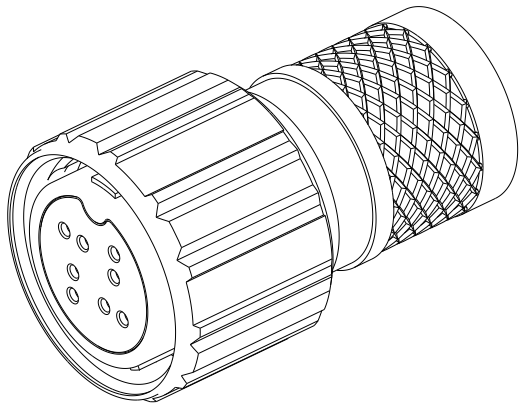

"TE" AND DATE
CODE ON 1 OF 6
SURFACES




NOTES:

- 1, -3 AND -5 ARE ELECTROLESS NICKEL PER MIL-C-26074.
- 2, -4 AND -6 ARE BLACK ZINC NICKEL PER AMS-2417.

BLACK ZINC NICKEL PLATING	B	2102355-6
NICKLE PLATING	B	2102355-5
BLACK ZINC NICKEL PLATING	A	2102355-4
NICKLE PLATING	A	2102355-3
BLACK ZINC NICKEL PLATING	NORMAL	2102355-2
NICKLE PLATING	NORMAL	2102355-1
FINISH	KEYING OPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±.
1 PLC	±.1
2 PLC	±.02
3 PLC	±.005
4 PLC	±.0005
ANGLES	±.
FINISH	-

DWN 19SEP2011

MCKIBBEN, JOHN

CHK 19SEP2011

DOWHOWER, KENNETH

APVD 19SEP2011

PRODUCT SPEC

108-2482

APPLICATION SPEC

114-32025

WEIGHT -

CUSTOMER DRAWING



TE Connectivity

NAME
PLUG ASSEMBLY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2102355	

SCALE 2:1	SHEET 1 OF 1	REV B
-----------	--------------	-------