
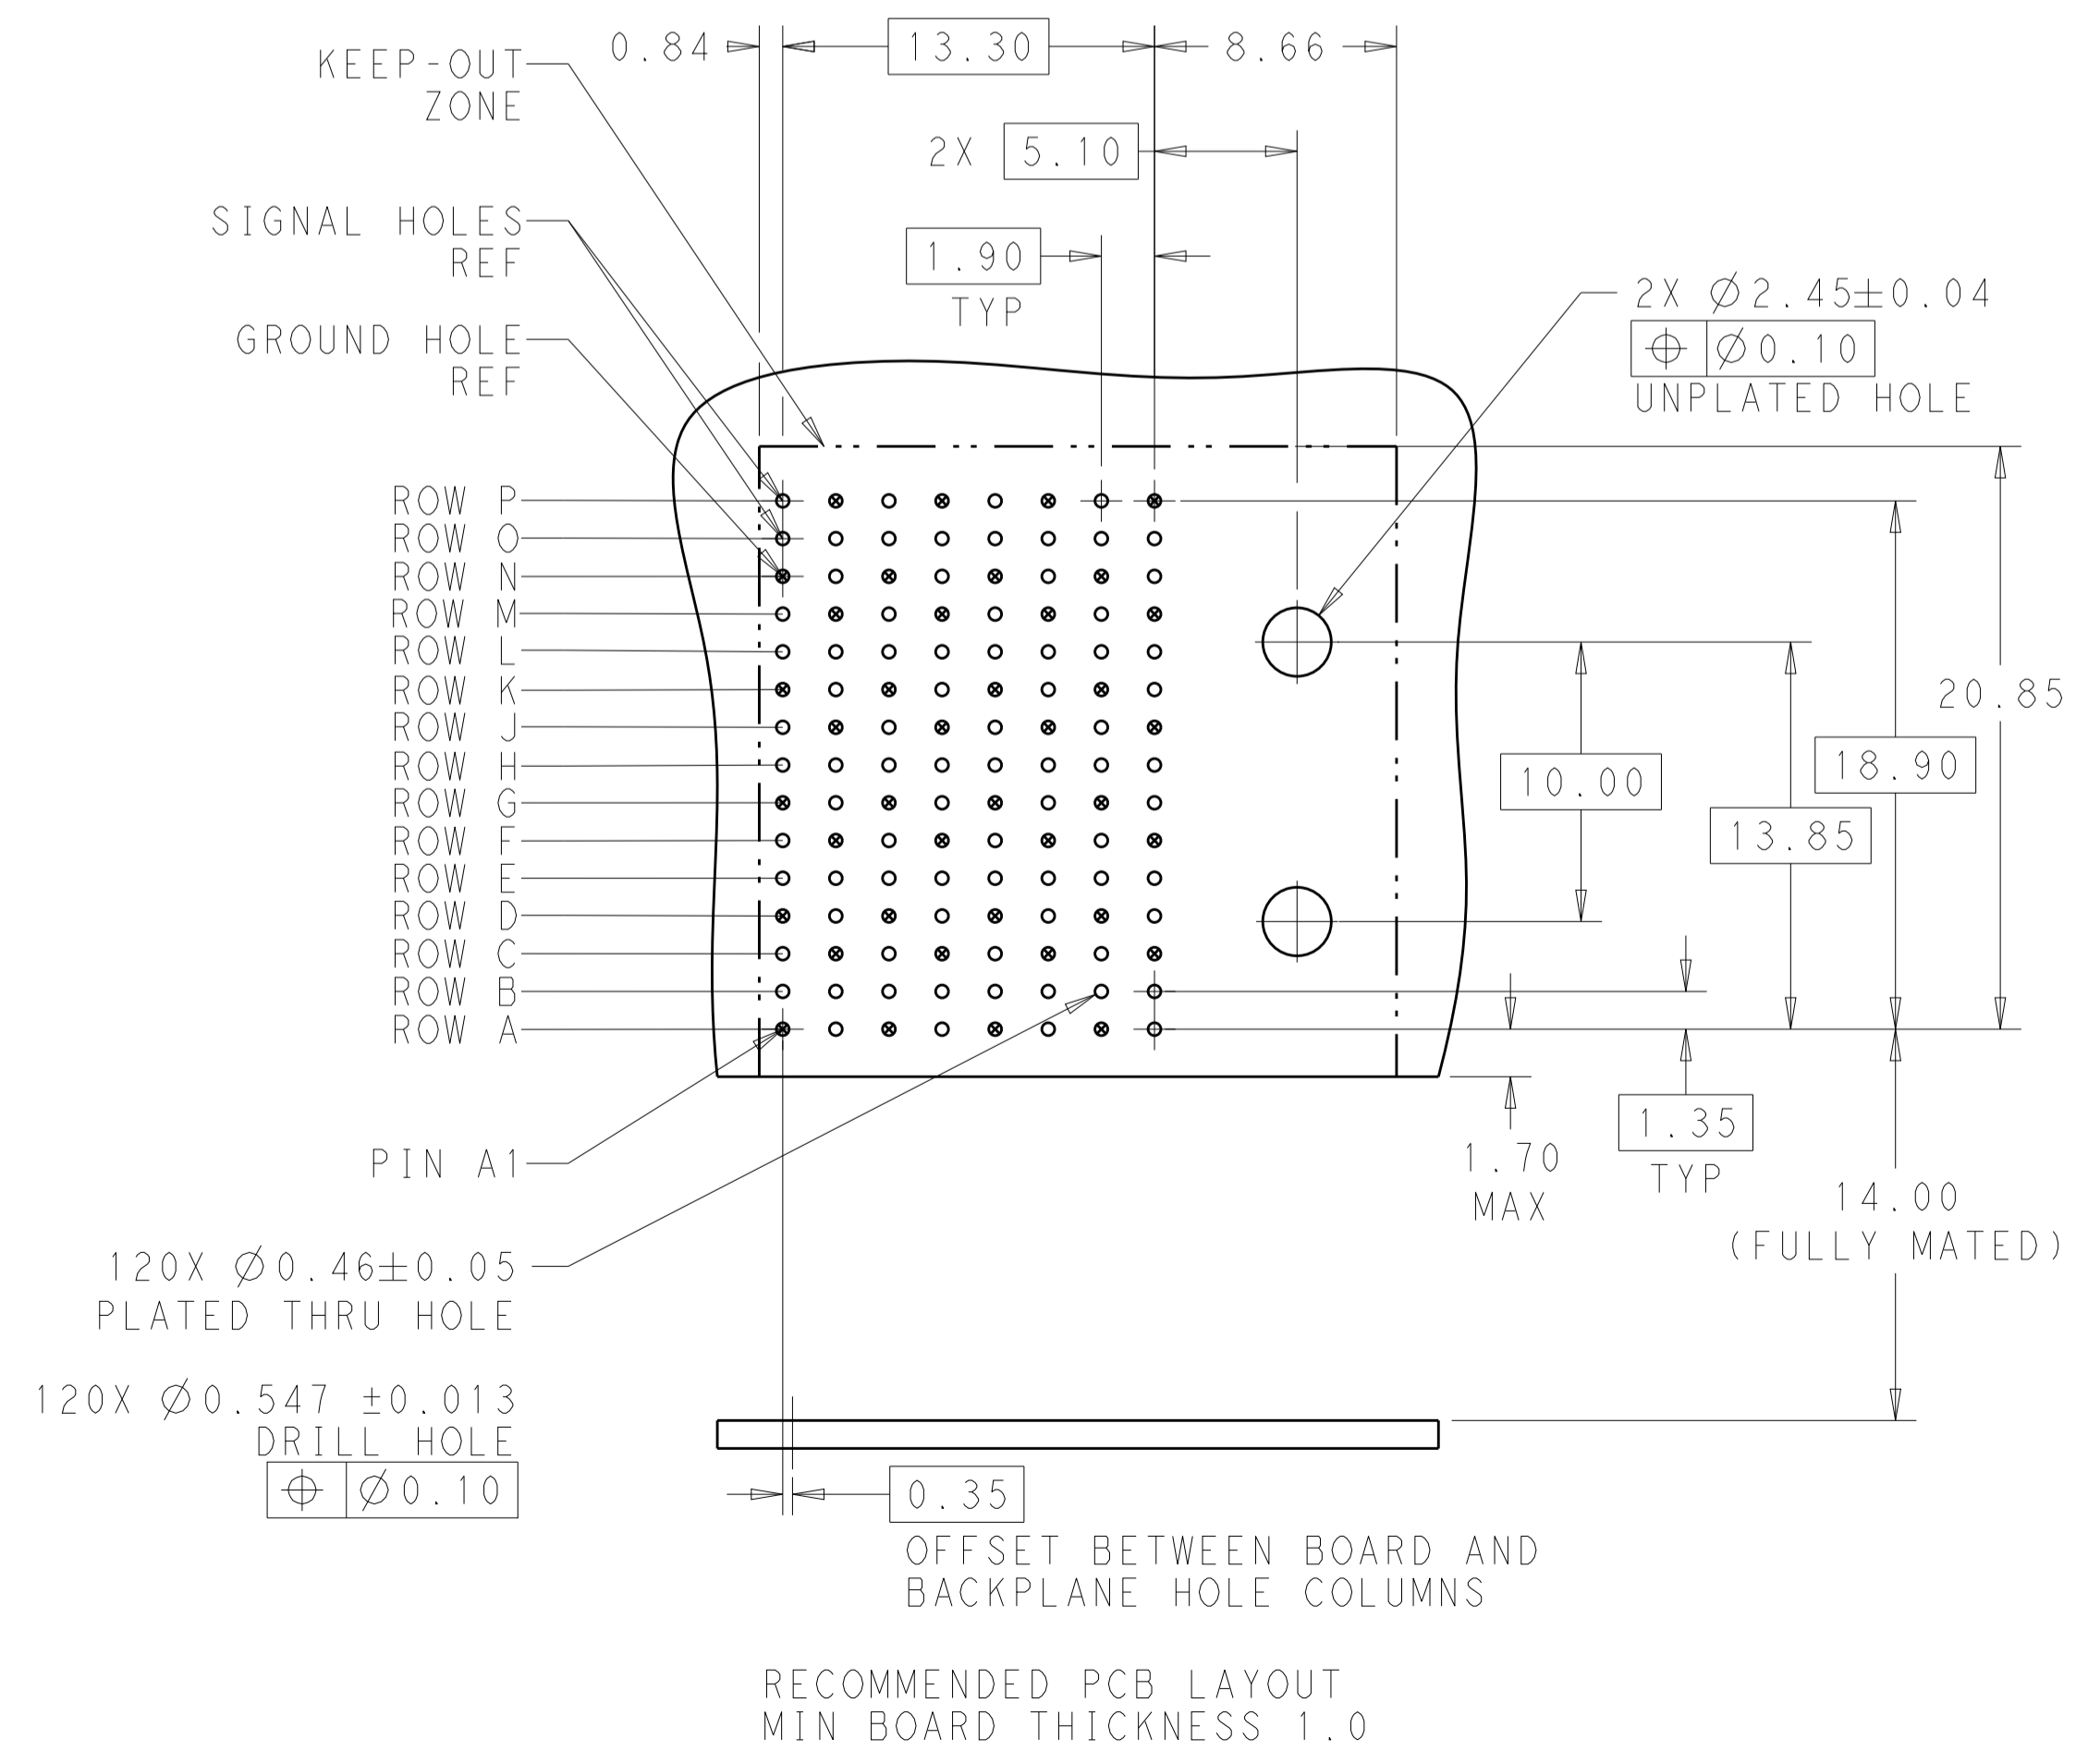



KEY POSITION CHART	
	NONE

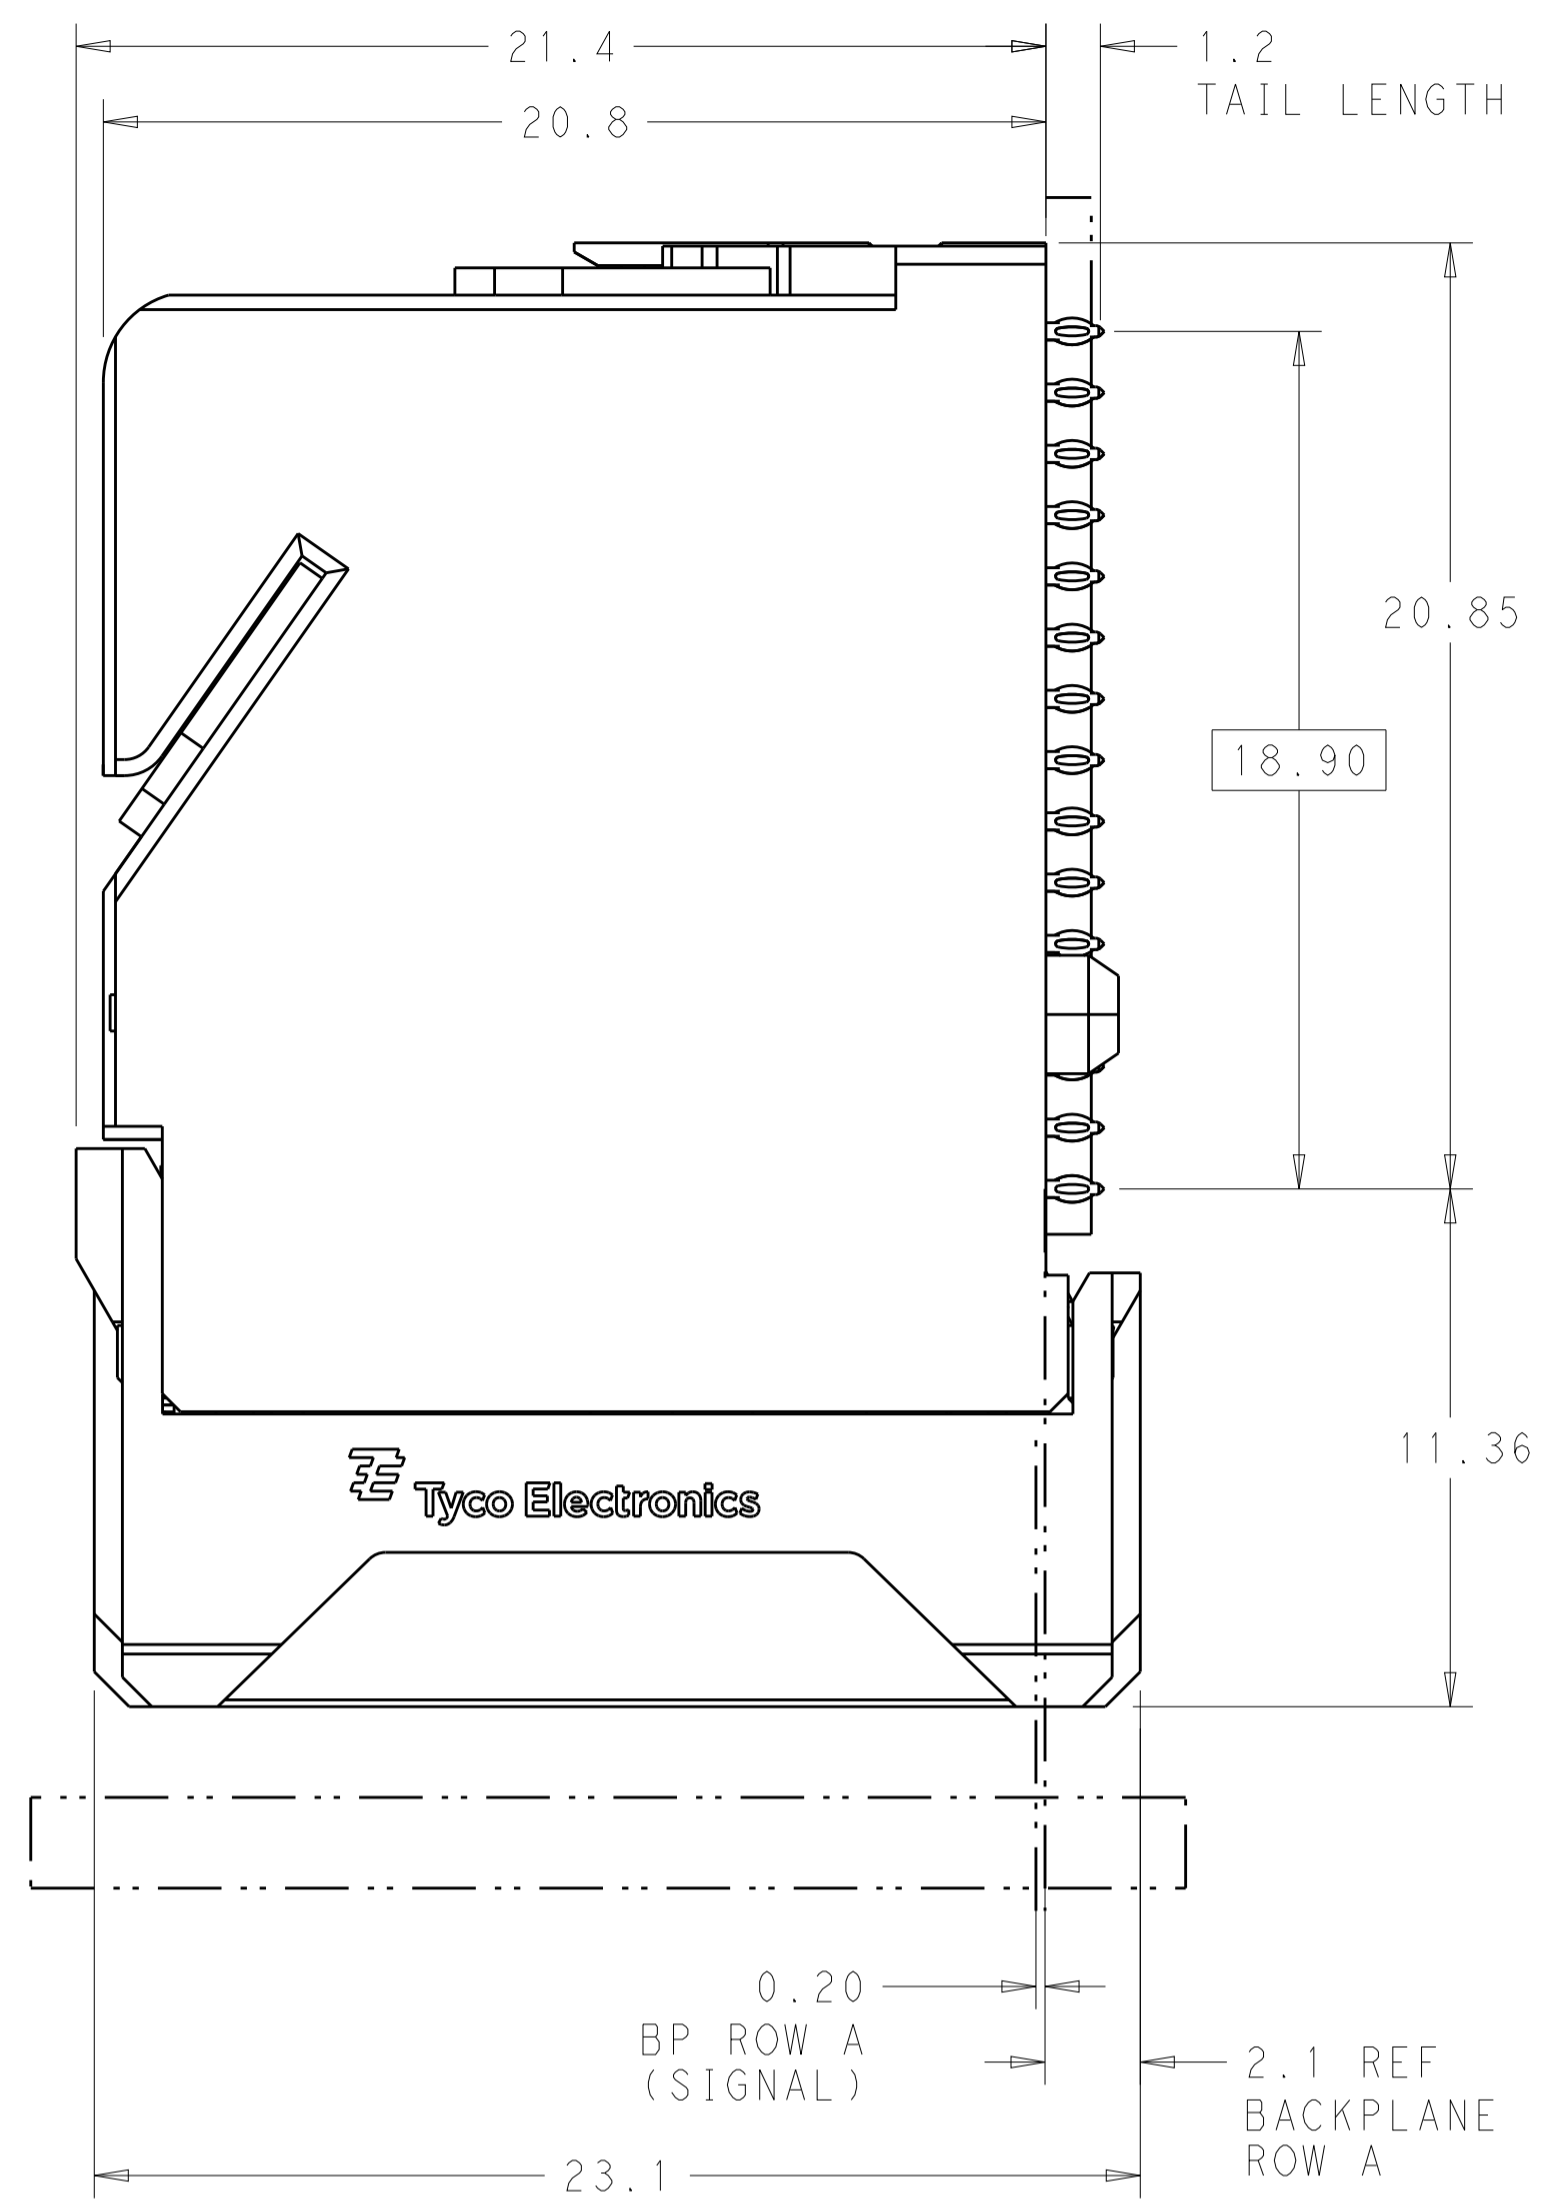

RECOMMENDED PCB LAYOUT  
MIN BOARD THICKNESS 1.0

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
B		REVISED PER ECO-15-004915	08APR2015	AP DD

- MATERIAL:  
HOUSING: LCP, GLASS FILLED, UL94V-0.  
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- FINISH:  
30µ" SELECTIVE GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- CONNECTORS SUPPLIED WITH MOUNTING SCREWS.

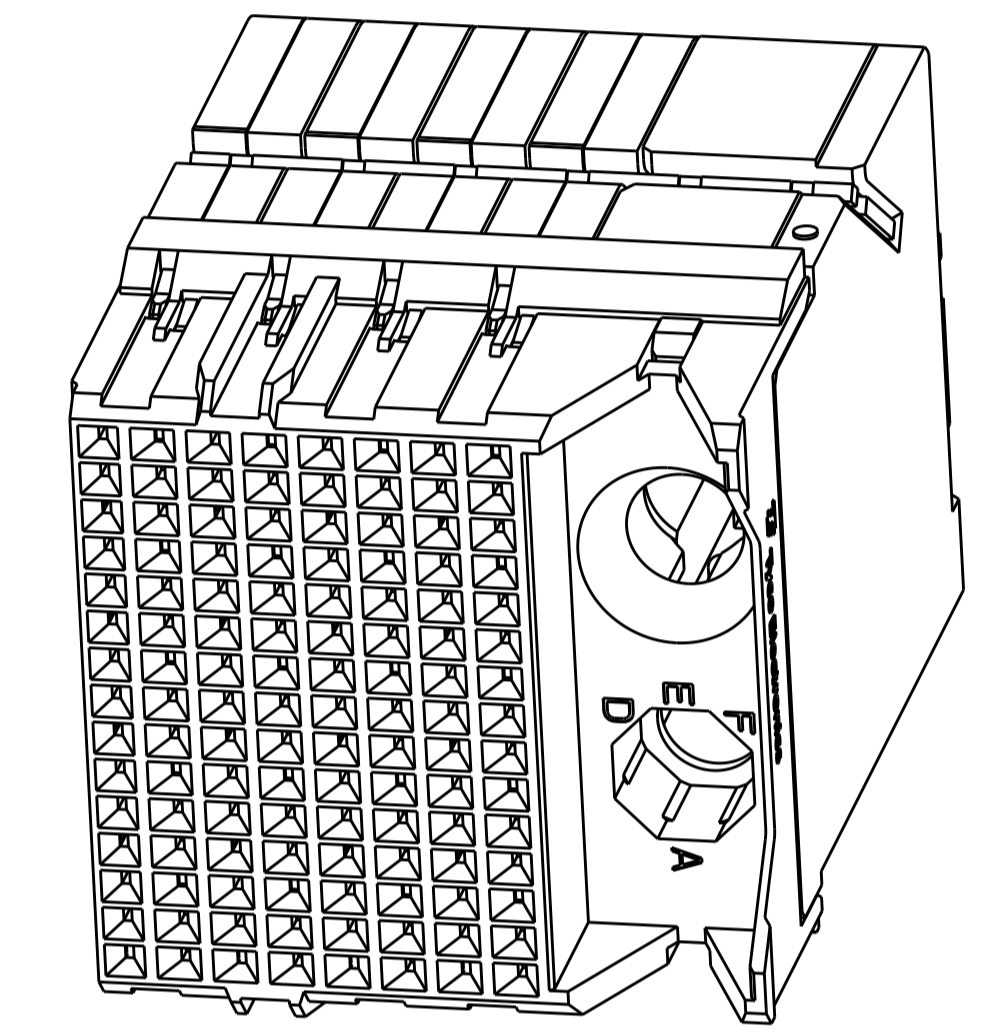

SCALE 4:1

REFER TO WWW.TE.COM FOR PRODUCT AVAILABILITY

H		8-2110096-1
G		7-2110096-1
F		6-2110096-1
E		5-2110096-1
D		4-2110096-1
C		3-2110096-1
B		2-2110096-1
A		1-2110096-1
NONE		2110096-1
KEY POSITION	FINISH	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL:	
mm	0 PLC	±	0.2	SEE TABLE	SEE TABLE
	1 PLC	±	0.13		
	2 PLC	±	0.10		
	3 PLC	±	0.075		
	4 PLC	±	0.05		
	ANGLES				

APVD: RIRAN HOLAL 09NOV2012	NAME: IMPACT, 5 PAIR, DAUGHTERCARD
CHK: D. DIXON 09NOV2012	PRODUCT SPEC: 8 COLUMN, RIGHT GUIDED, SIGNAL
APVD: D. DIXON 09NOV2012	APPLICATION SPEC: MODULE, 0.46 EYELET
SIZE: A1	CAGE CODE: 2110096
WEIGHT: -	RESTRICTED TO: -
Customer Drawing	SCALE: 6:1 SHEET: 1 OF 1 REV: B