© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECR-24-213594	02JUL2024	RK	FJS

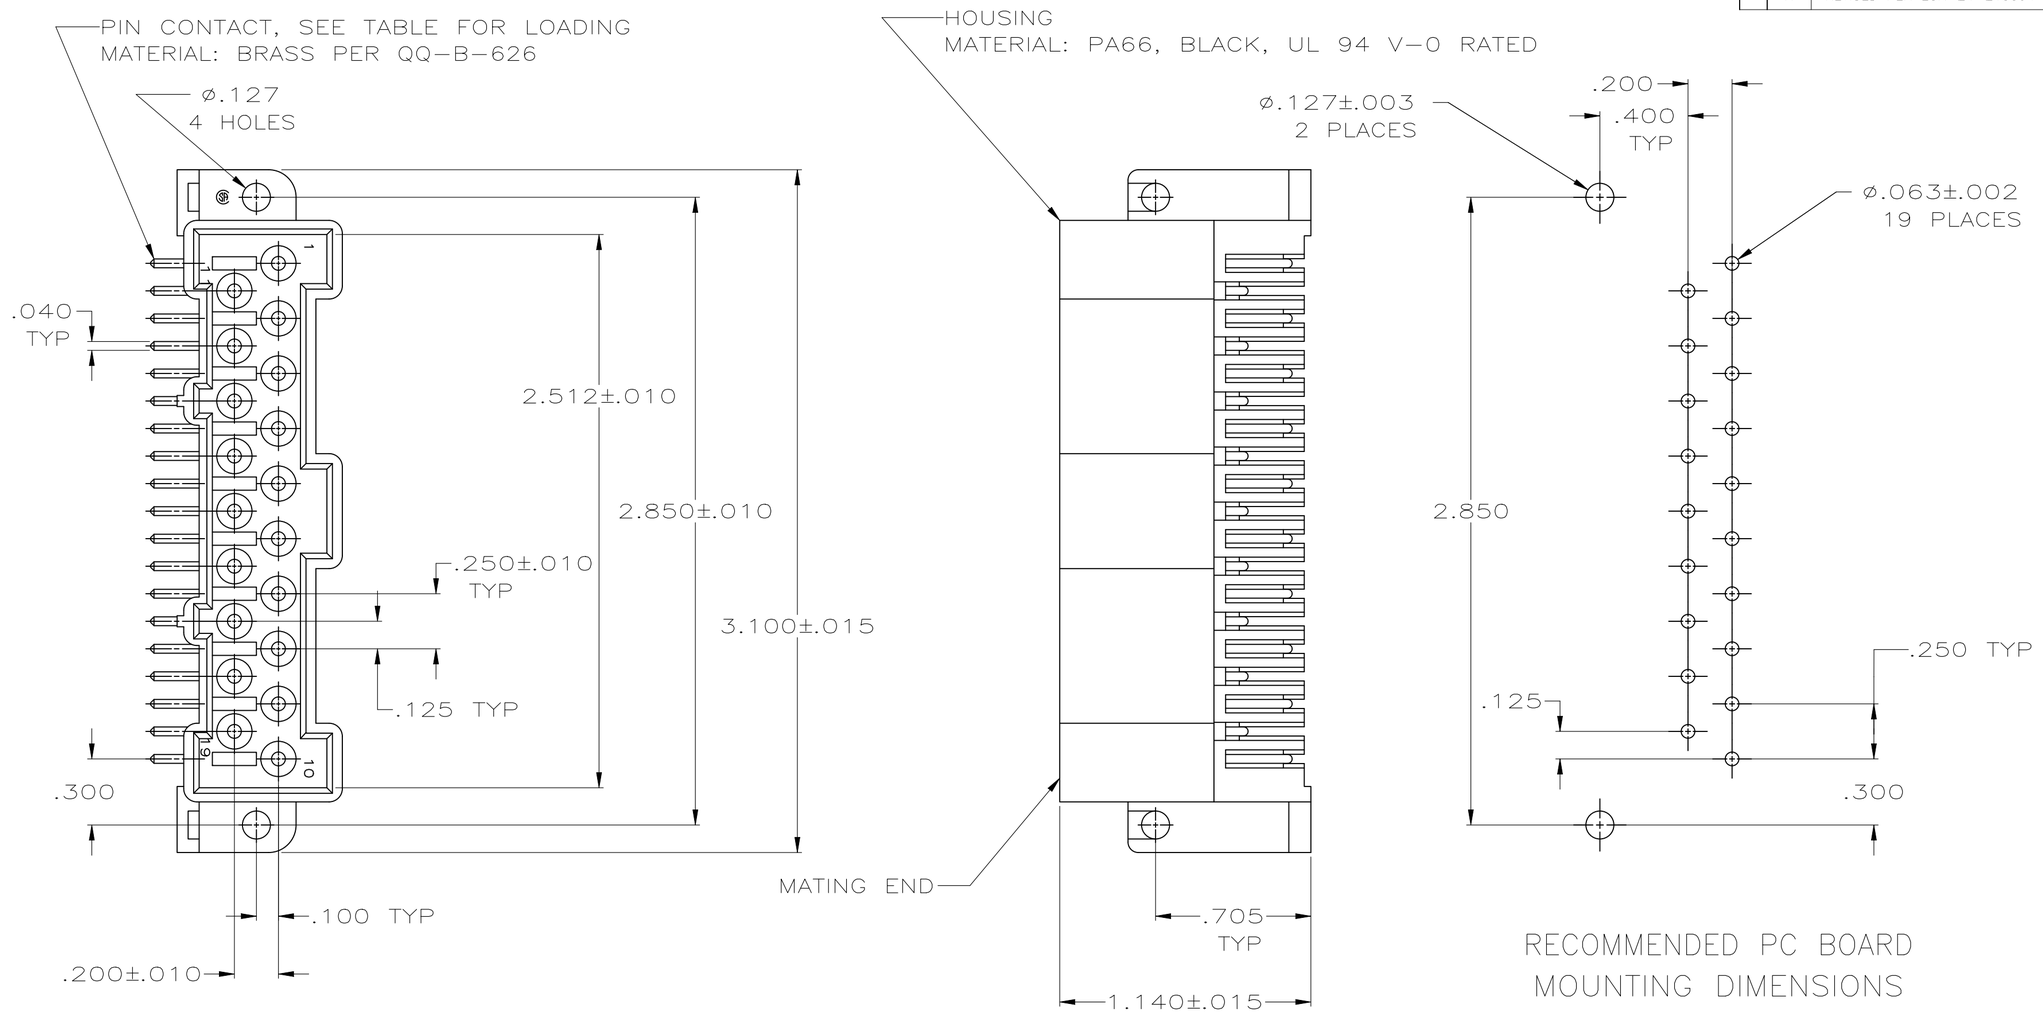

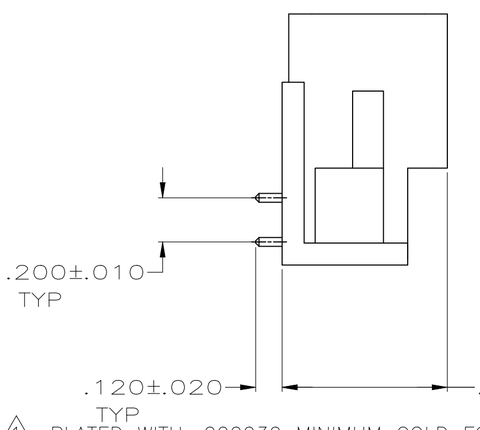

	PIN CONTACT FINISH	LOADING	PART NUMBER
3 OBSOLETE	2	ALL EXCEPT 10 & 19	212630-6
3 OBSOLETE	2	ALL EXCEPT 1 & 11	212630-5
	2	ALL	212630-4
OBSOLETE	1	ALL EXCEPT 10 & 19	212630-3
OBSOLETE	1	ALL EXCEPT 1 & 11	212630-2
OBSOLETE	1	ALL	212630-1

1. PLATED WITH .000030 MINIMUM GOLD FOR LENGTH OF .200 MINIMUM FROM MATING END, .000150 MINIMUM TIN-LEAD ON REMAINDER, ALL OVER .000050 MINIMUM NICKEL ON ENTIRE CONTACT.
2. PLATED WITH .000030 MINIMUM PRECIOUS METAL PLATE FOR LENGTH OF .200 MINIMUM FROM MATING END, .000150 MINIMUM TIN ON REMAINDER, ALL OVER .000050 MINIMUM NICKEL ON ENTIRE CONTACT.
3. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL: SEE CALLOUTS
FINISH: SEE TABLE

DWN J LIPPERT 10-19-88
CHK J McCLINTON 10-19-88
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME: PIN HEADER ASSEMBLY, 19 POS IN LINE, RIGHT ANGLE, METRIMATE –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-212630	–

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV H

212630

1471-9 (1/15)