THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	CREATED BY AUTOMATION PROGRAM	02MAY2011	RKC	JE
	A1	REVISED PER ECN-24-252171	21FEB2024	AP	RS

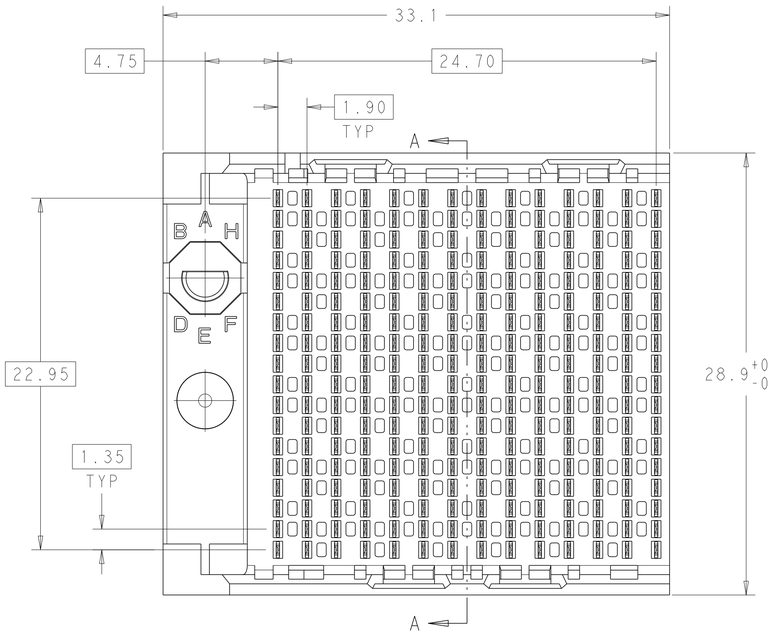

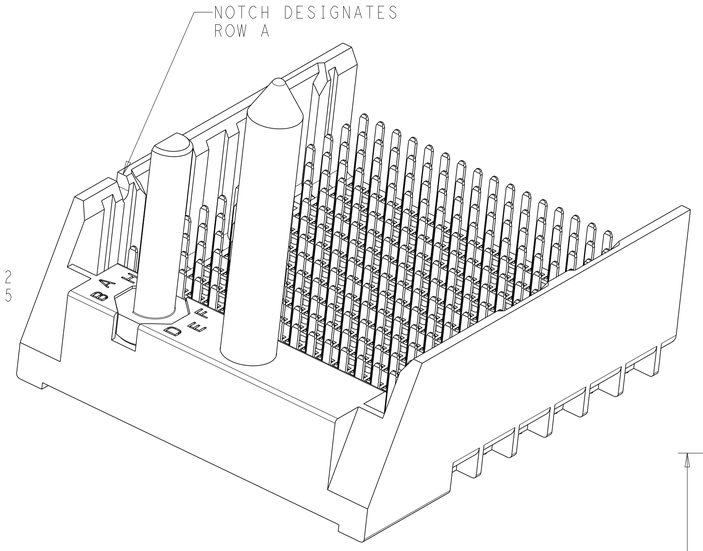

1. MATERIAL:
   HOUSING: LCP, GLASS FILLED, UL94V-0.
   TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
2. FINISH:
   30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
3. FINISH:
   30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
5. FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH, Ø3.66 DRILL, AND Ø6.5 PAD.
6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

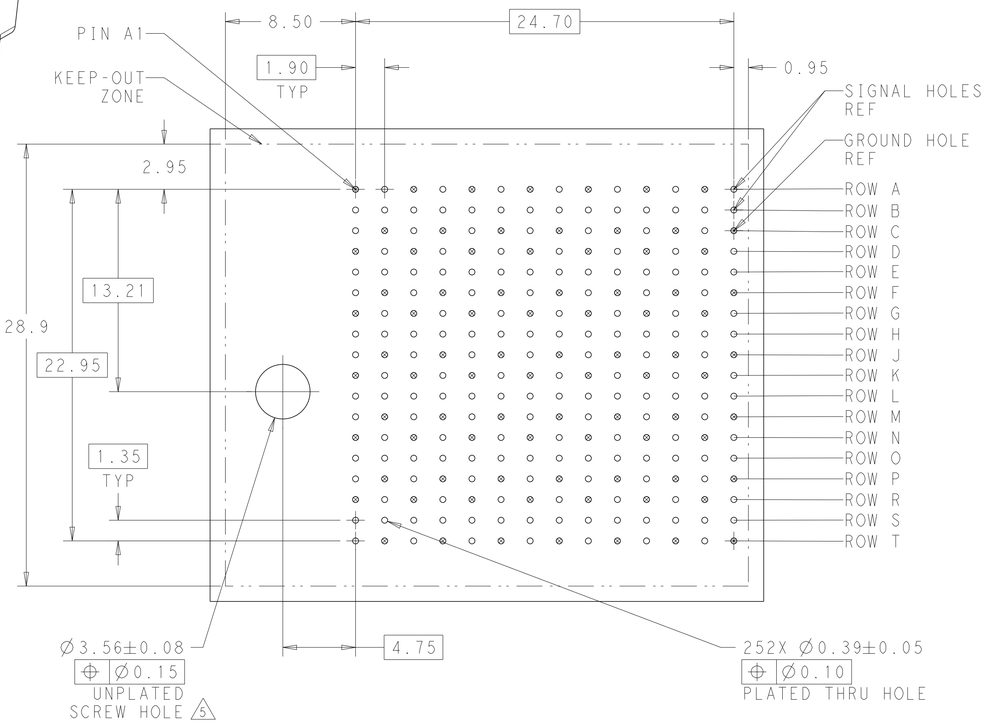

LEFT GUDIED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

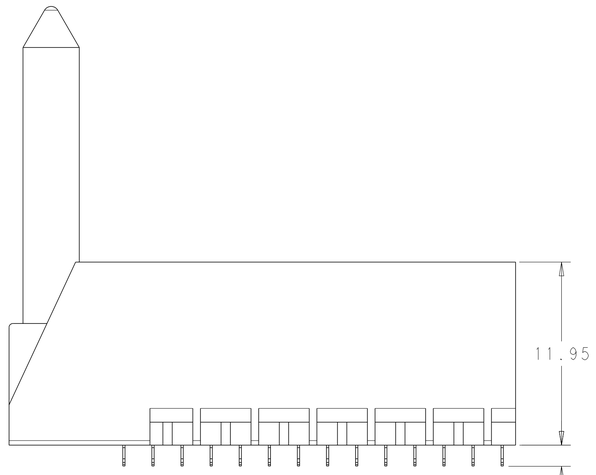

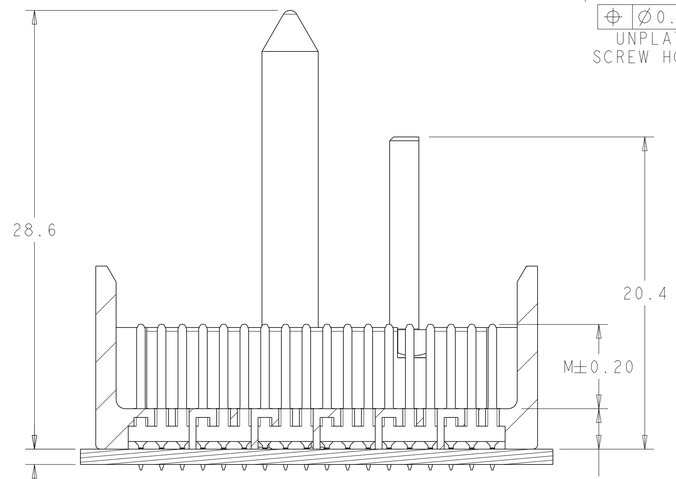

SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R COELLO 02MAY2011	TE Connectivity
		CHK J. EABY 02MAY2011	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.25 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±-	APVD J. EABY 02MAY2011	NAME IMPACT, 6 PAIR, 14 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.39 PTH
		PRODUCT SPEC -	
		APPLICATION SPEC -	SIZE A1 / CAGE CODE 00779 / DRAWING NO C-2132001 / RESTRICTED TO -
MATERIAL 1	FINISH SEE TABLE -	WEIGHT -	
		CUSTOMER DRAWING	SCALE 5:1 / SHEET 1 OF 2 / REV A1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

FINISH	KEY POSITION	DIM M	PART NUMBER	
3	H	5.5	8-2132001-6	
3	H	4.9	8-2132001-5	
3	H	4.5	8-2132001-4	
2	H	5.5	8-2132001-3	
2	H	4.9	8-2132001-2	
2	H	4.5	8-2132001-1	
3	G	5.5	7-2132001-6	
3	G	4.9	7-2132001-5	
3	G	4.5	7-2132001-4	
2	G	5.5	7-2132001-3	
2	G	4.9	7-2132001-2	
2	G	4.5	7-2132001-1	
3	F	5.5	6-2132001-6	
3	F	4.9	6-2132001-5	
3	F	4.5	6-2132001-4	
2	F	5.5	6-2132001-3	
2	F	4.9	6-2132001-2	
2	F	4.5	6-2132001-1	
3	E	5.5	5-2132001-6	
3	E	4.9	5-2132001-5	
3	E	4.5	5-2132001-4	
2	E	5.5	5-2132001-3	
2	E	4.9	5-2132001-2	
2	E	4.5	5-2132001-1	
3	D	5.5	4-2132001-6	
3	D	4.9	4-2132001-5	OBSOLETE
3	D	4.5	4-2132001-4	
2	D	5.5	4-2132001-3	
2	D	4.9	4-2132001-2	
2	D	4.5	4-2132001-1	
3	C	5.5	3-2132001-6	
3	C	4.9	3-2132001-5	
3	C	4.5	3-2132001-4	
2	C	5.5	3-2132001-3	
2	C	4.9	3-2132001-2	
2	C	4.5	3-2132001-1	
3	B	5.5	2-2132001-6	
3	B	4.9	2-2132001-5	
3	B	4.5	2-2132001-4	
2	B	5.5	2-2132001-3	
2	B	4.9	2-2132001-2	
2	B	4.5	2-2132001-1	
3	A	5.5	1-2132001-6	
3	A	4.9	1-2132001-5	
3	A	4.5	1-2132001-4	
2	A	5.5	1-2132001-3	
2	A	4.9	1-2132001-2	
2	A	4.5	1-2132001-1	
3	-	5.5	2132001-6	
3	-	4.9	2132001-5	
3	-	4.5	2132001-4	
2	-	5.5	2132001-3	
2	-	4.9	2132001-2	
2	-	4.5	2132001-1	OBSOLETE

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION CHART

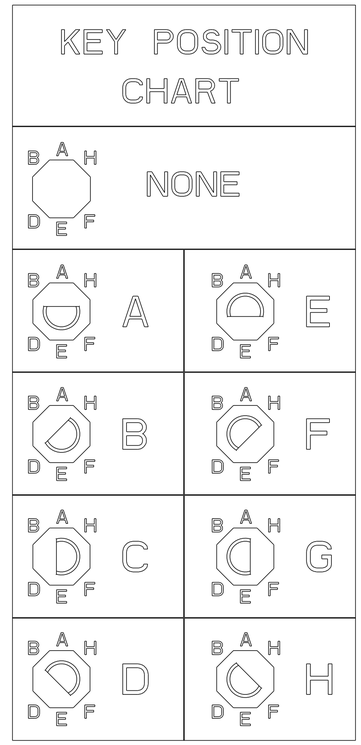

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.25
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -

FINISH SEE TABLE -

DWN	R COELLO	02MAY2011
CHK	J. EABY	02MAY2011
APVD	J. EABY	02MAY2011
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

TE Connectivity

NAME IMPACT, 6 PAIR, 14 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.39 PTH

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2132001	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 2 | REV A1