




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	H-10155	19OCT1992	JvdH	M.S
	01	TIN-LEAD changed to TIN	05OCT2004	Haas	Zitz
	AB	NEW DRAWING CREATED IN CREO	26JUNE2014	JB JH	BRUN
	AB1	NOTE 4 MODIFIED	18NOV2015	MAH.	BRUN

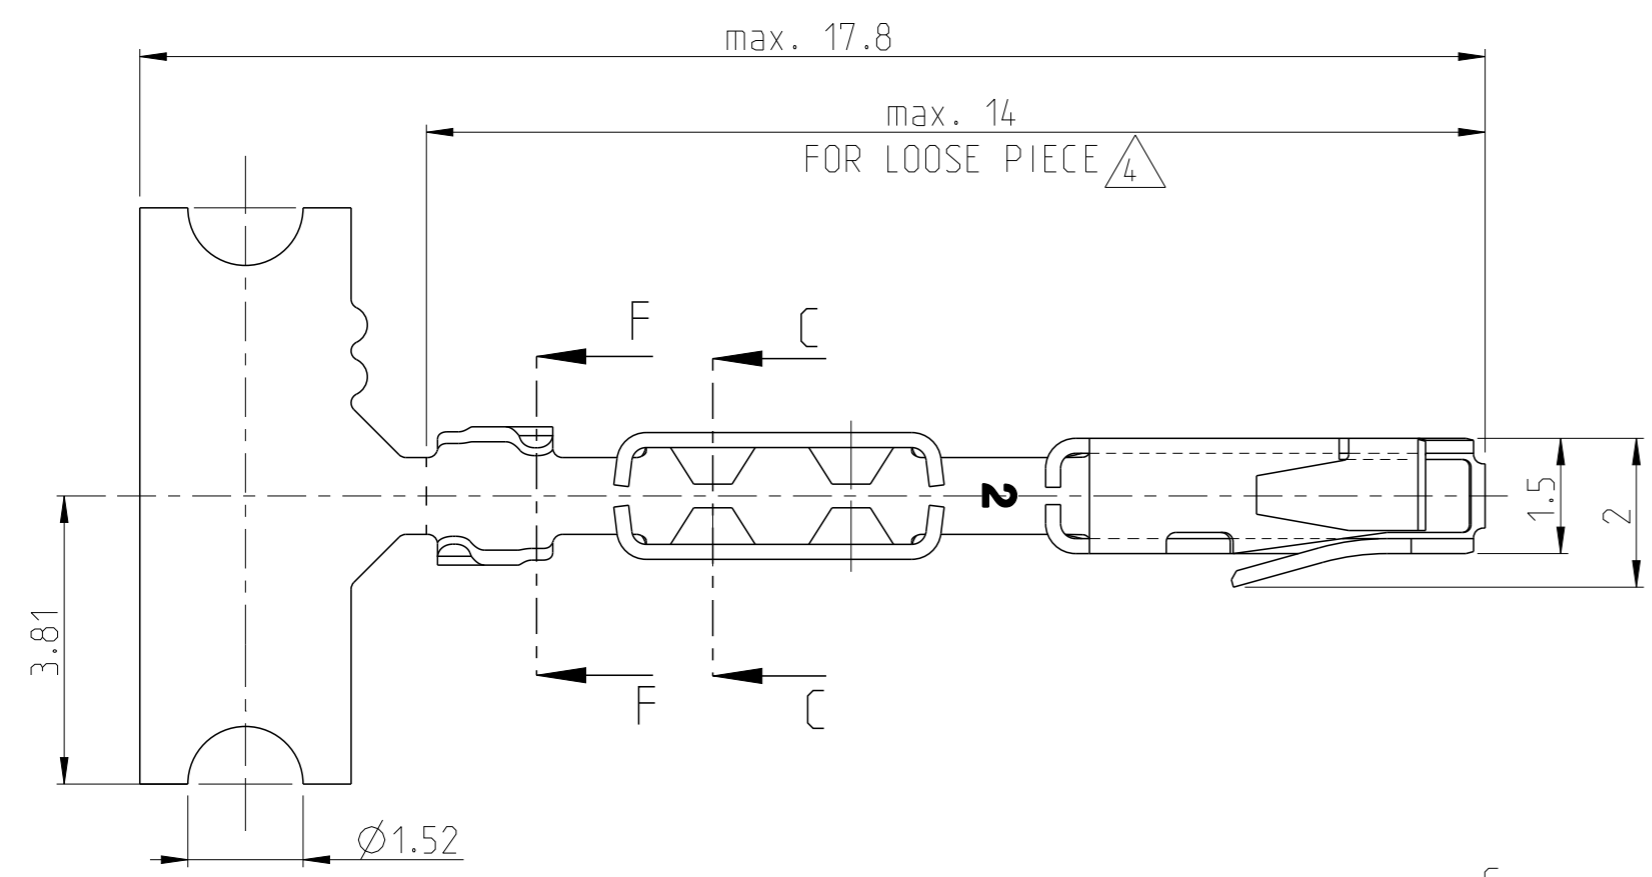

NOTES:

- 1 SUITABLE FOR 0.64x0.64 POST
- 2 CRIMP AREA PLATED WITH 2.5 μm MIN. TIN OVER 0.8 NICKEL
- 3 PREPLATED STOCK 0.76 μm MIN. GOLD STRIPE ON 0.76 μm MIN. NICKEL
- AB1 4 TIN PLATED 2.5-5 μm OVER MIN. 0.5 μm Ni (MEASURED AT OUTSIDE)
- 5 14.0 MAX. FOR LOOSE PIECE

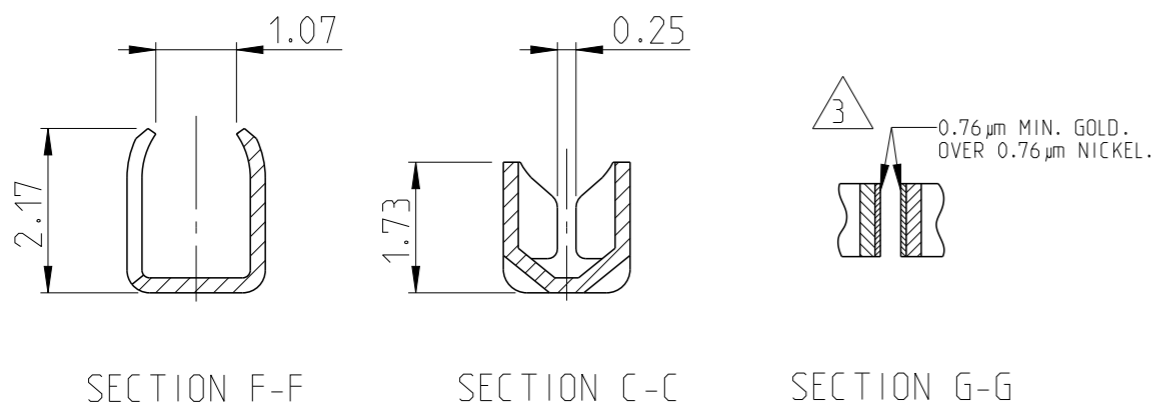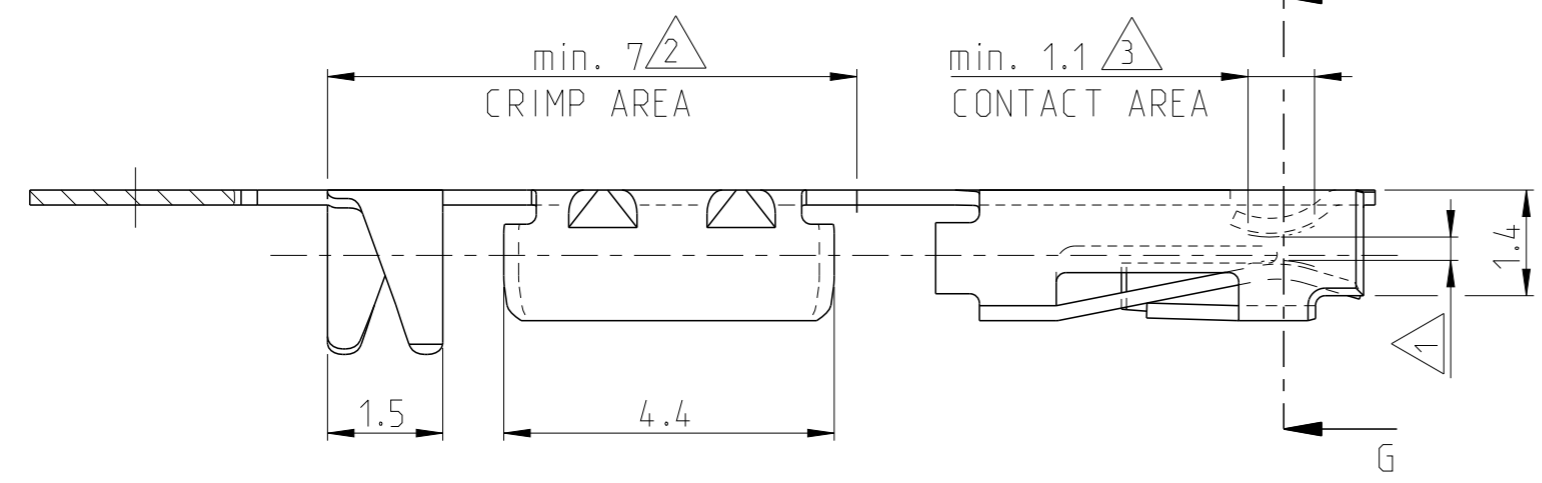

215283-5	215282-9	PHOSPHOR BRONZE	4
—	215282-2	PHOSPHOR BRONZE	2 3
LOOSE PIECE NO.	ORDER NO.	MATERIAL	PLATING

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
MATERIAL	FINISH
-	-

28MAR2014
 DWN J.v.D HEIJDEN.
 CHK M.SPOOREN
 APVD L.v.SOEST.
 PRODUCT SPEC
 APPLICATION SPEC
 WEIGHT -

STE TE Connectivity

TANDEM SPRING RECEPTACLE WITH MASS TERMINATION AREA FOR AWG 26-22

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	©=215282	-

CUSTOMER DRAWING SCALE 10:1 SHEET 1 OF 1 REV AB1