






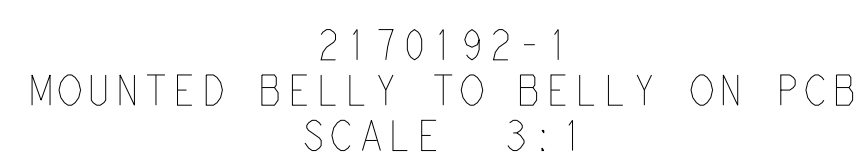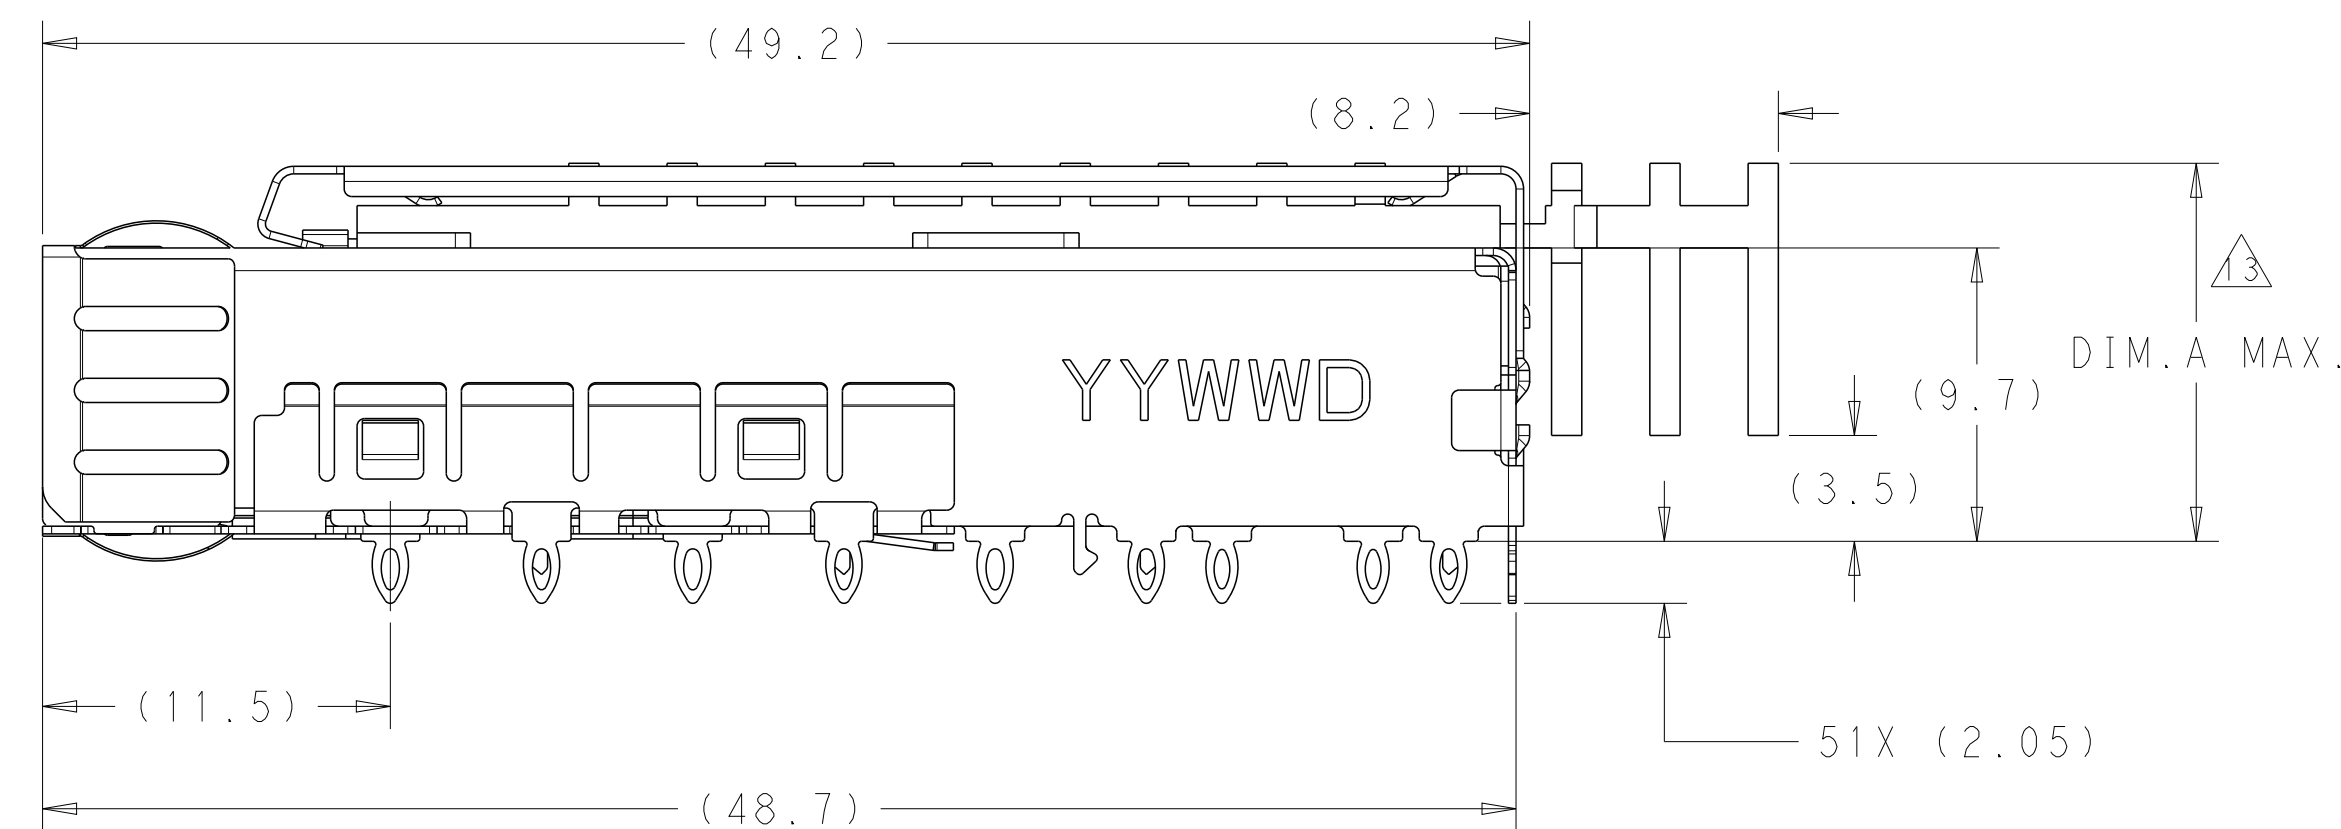


- DIMENSION APPLIES PRIOR TO INSERTION OF SFP MODULE

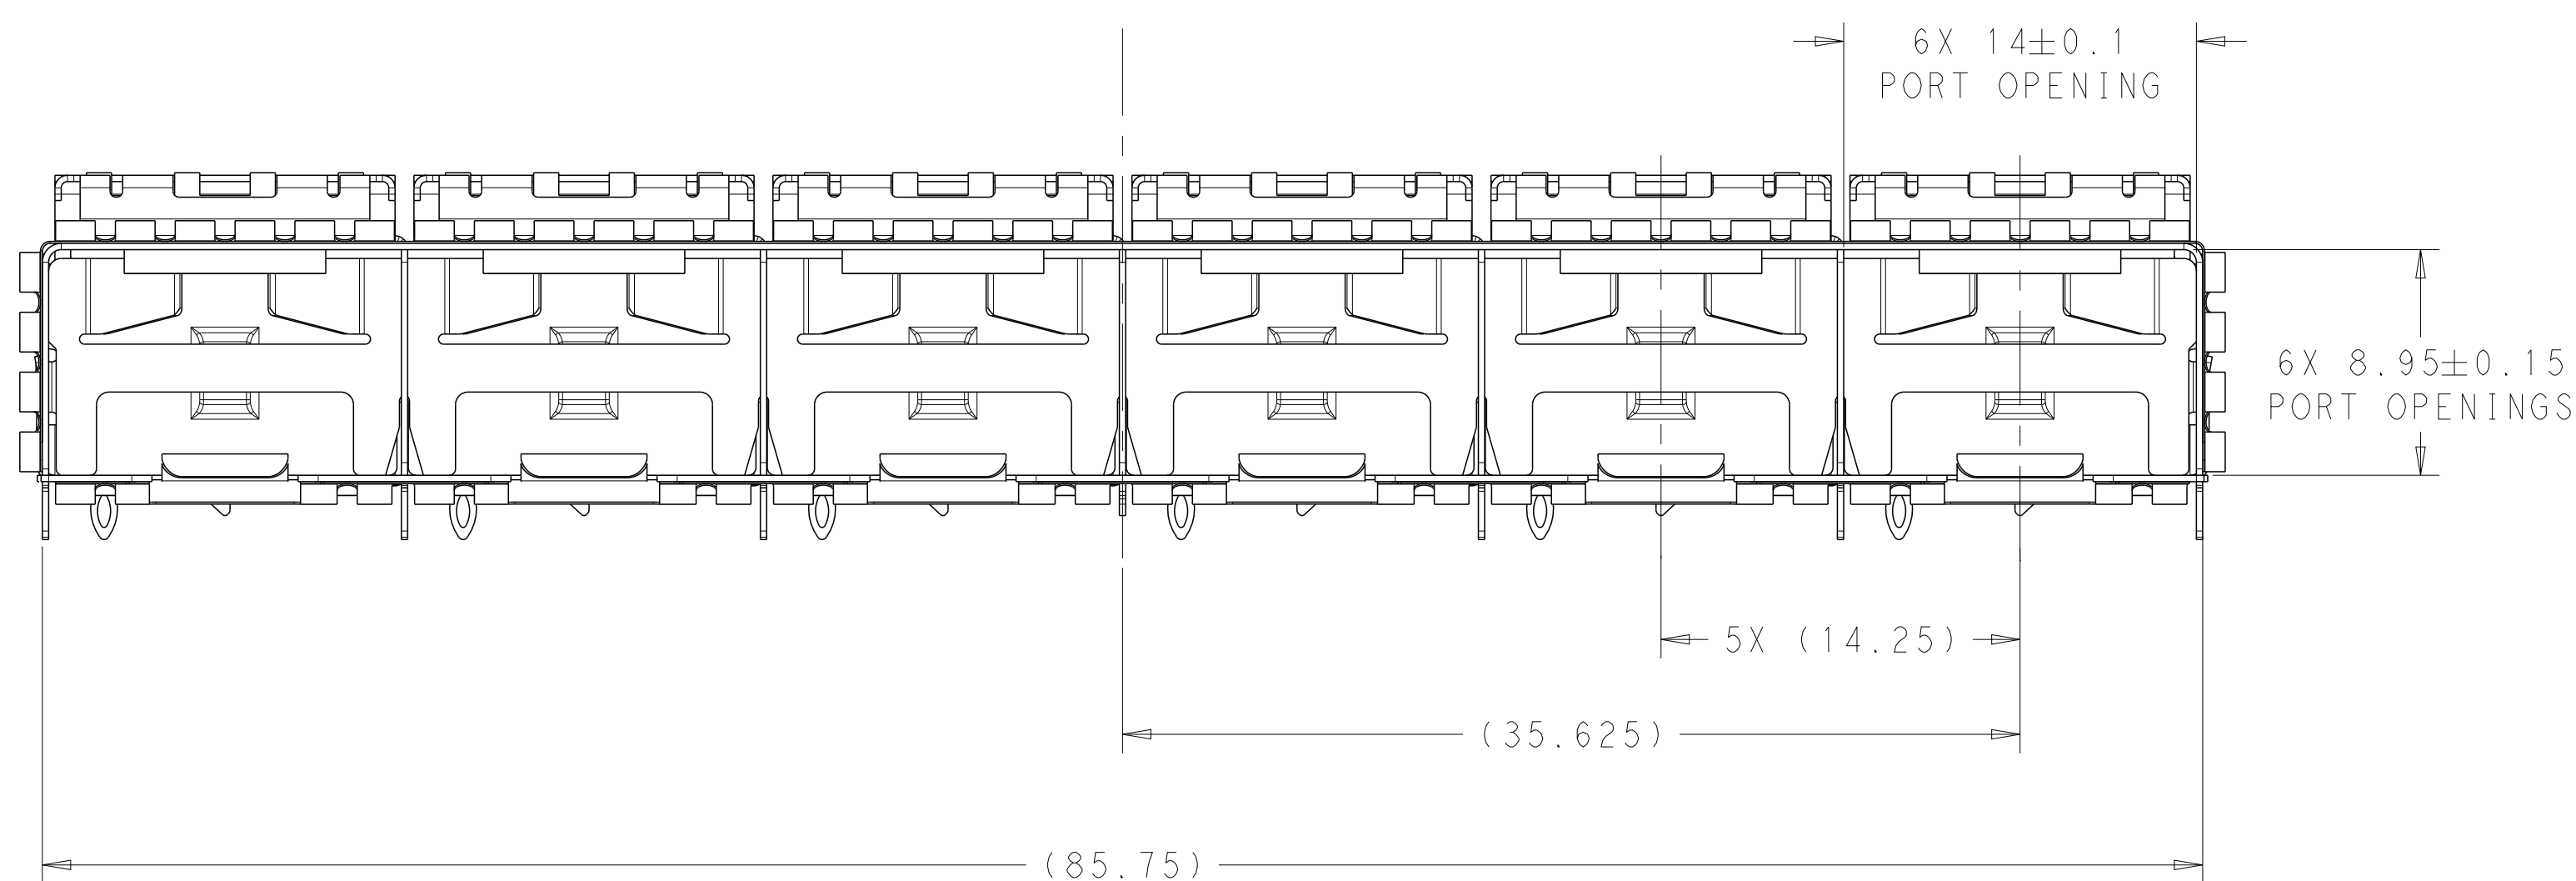


PRELIMINARY OBSOLETE	13.10 MAX.(WORKING)	FIN TYPE	HEAT SINK W/ THE FIRST ROW PIN	2170192-3
	20.2 MAX	PIN TYPE	HEAT SINK W/ THE FIRST ROW PIN	2170192-2
	13 MAX	PIN TYPE	HEAT SINK W/O THE FIRST ROW PIN	2170192-1
	A	HEAT SINK	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22NOV2011 CHG TIM XUF 22NOV2011 ALEX CAI 22NOV2011 APVD ALEX CAI 22NOV2011		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLOC ±0.25 1 PLOC ±0.20 2 PLOC ±0.15 3 PLOC ±0.1 4 PLOC ±0.1 ANGLES ±1°		NAME SFP+ ENHANCED 1X6 CAGE ASSEMBLY, PRESS FIT, EXTERNAL EM1 SPRINGS WITH HEATSINK	
MATERIAL		FINISH		WEIGHT	
1		2		-	
Customer Drawing				SIZE A1 CAGE CODE 100779 DRAWING NO C=2170192	
				RESTRICTED TO - SCALE 1:1 SHEET 1 OF 5 REV A2	


LOC		DIST		REVISIONS						
GP		00		P	LTR	DESCRIPTION	DATE	OWN	APVD	
					-	SEE SHEET 1	-	-	-	

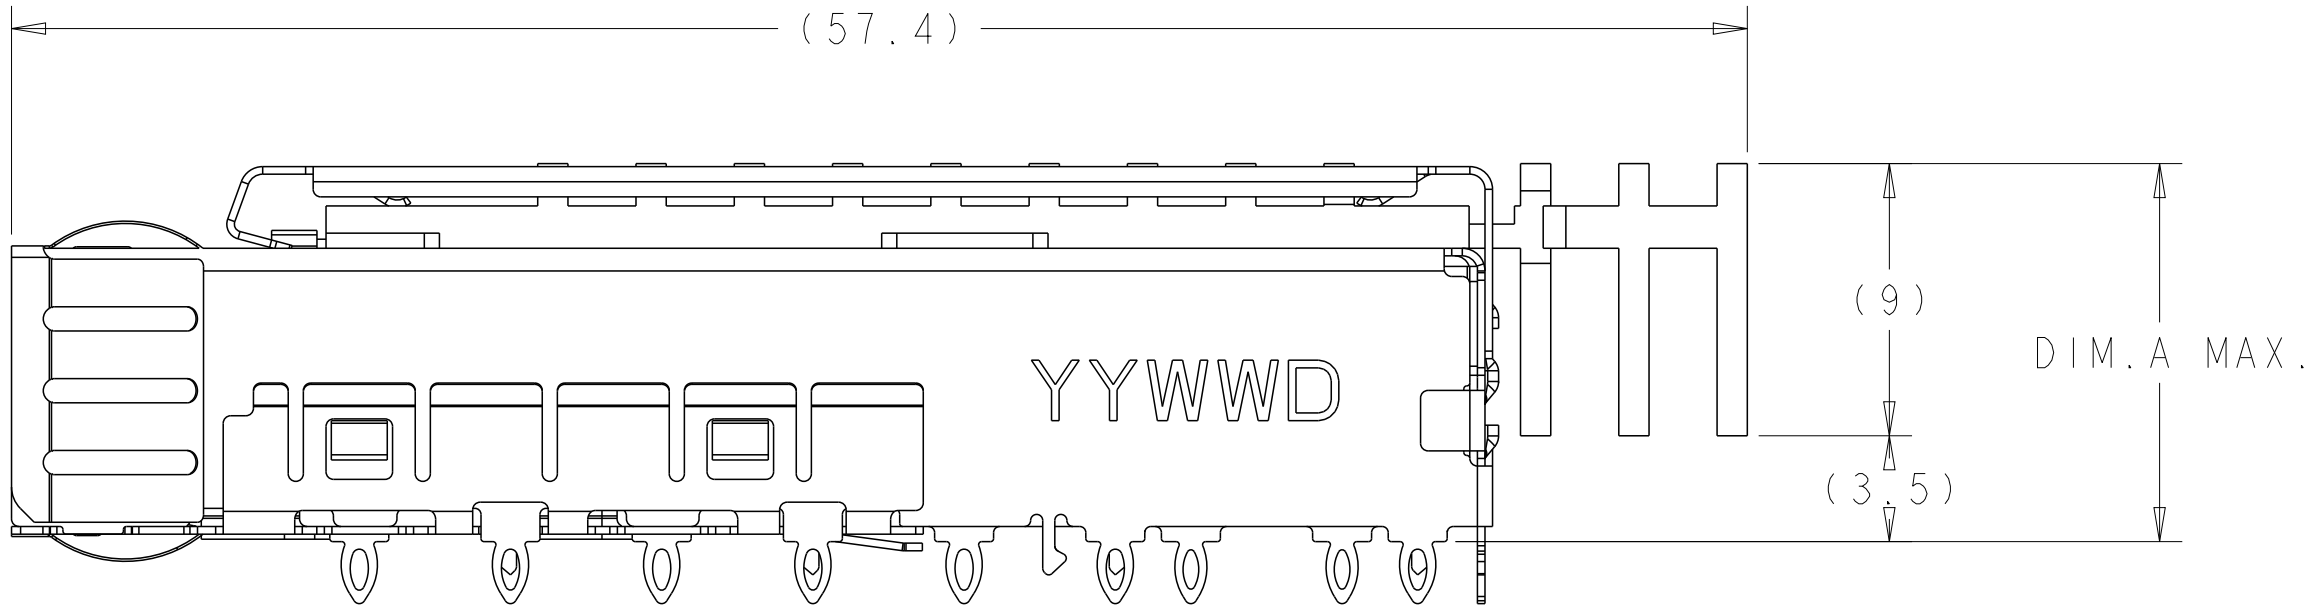


2170192-1 AS SHOWN
HEAT SINK W/O THE FIRST ROW PIN

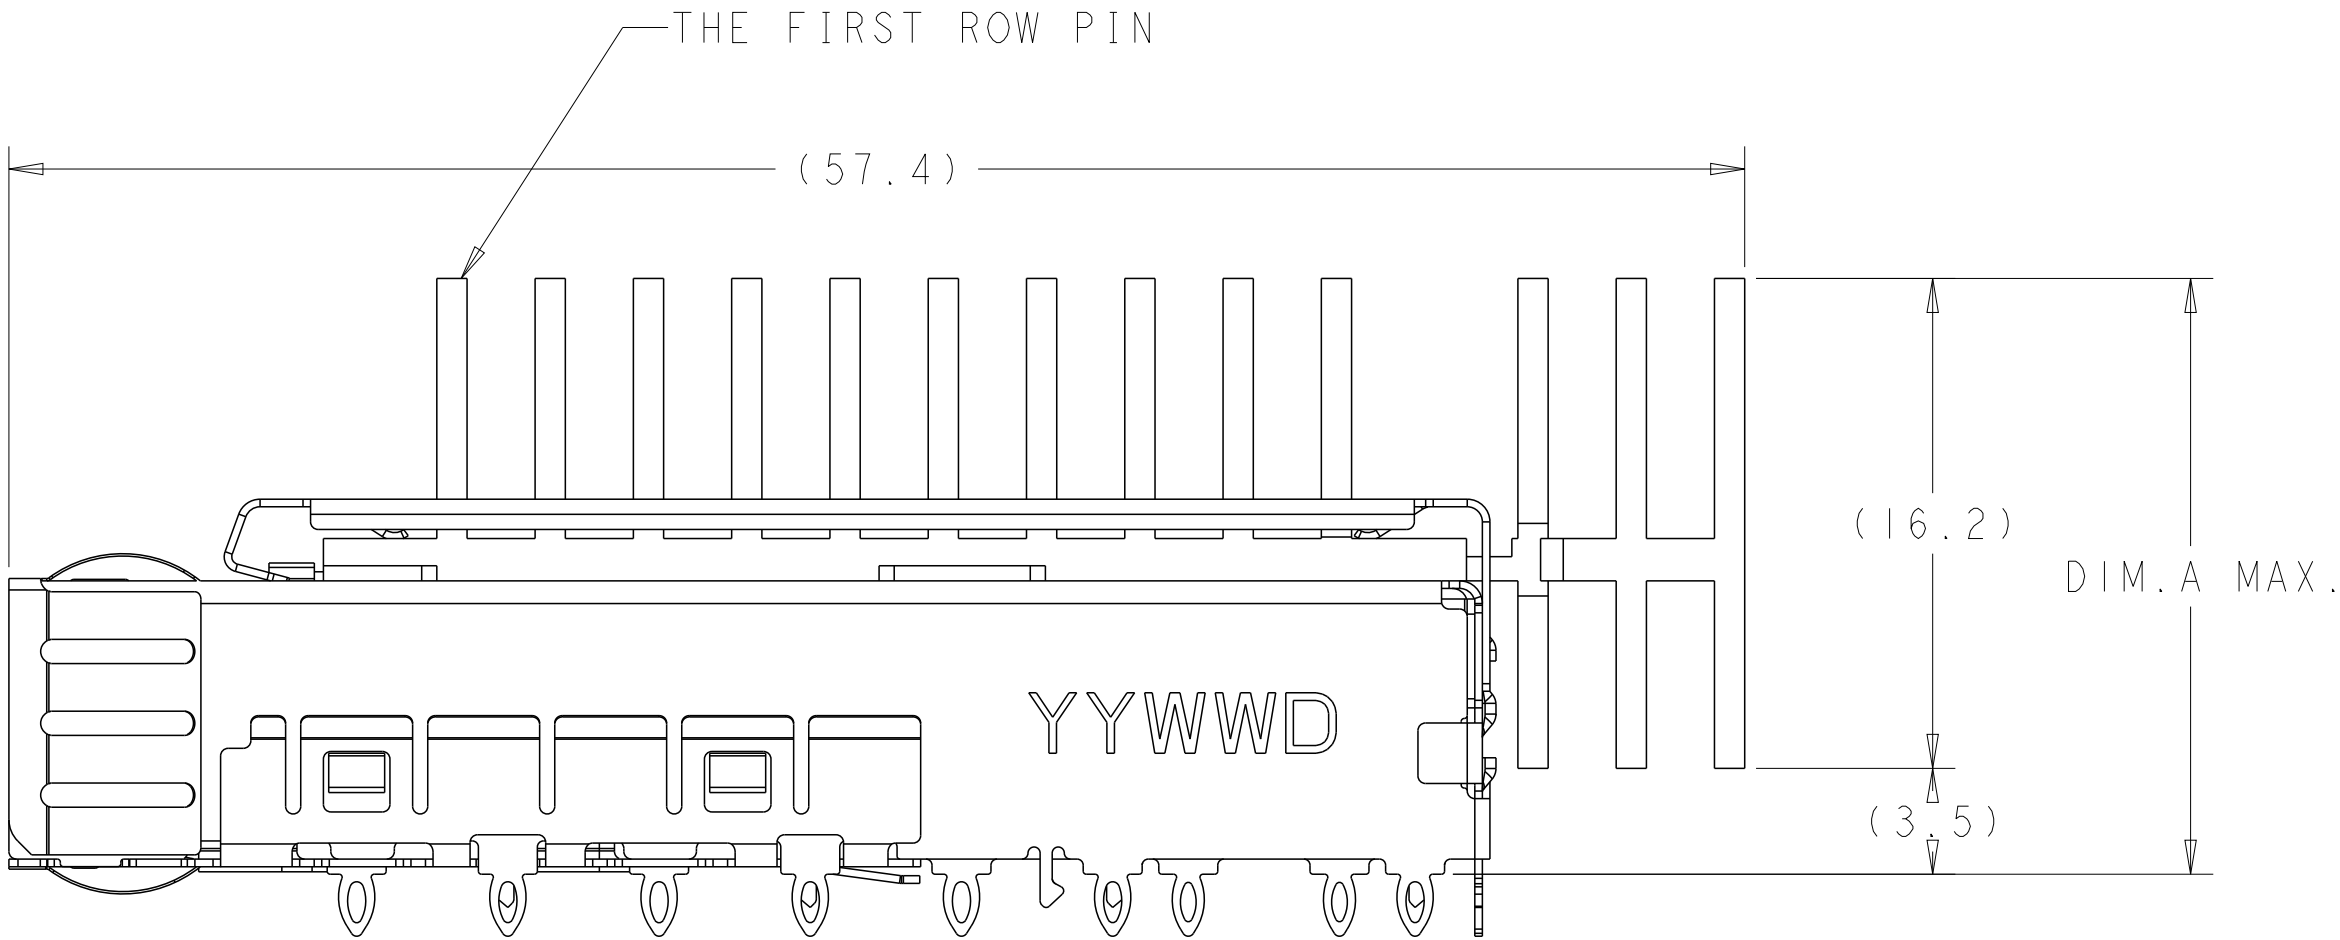


2170192-2 AS SHOWN

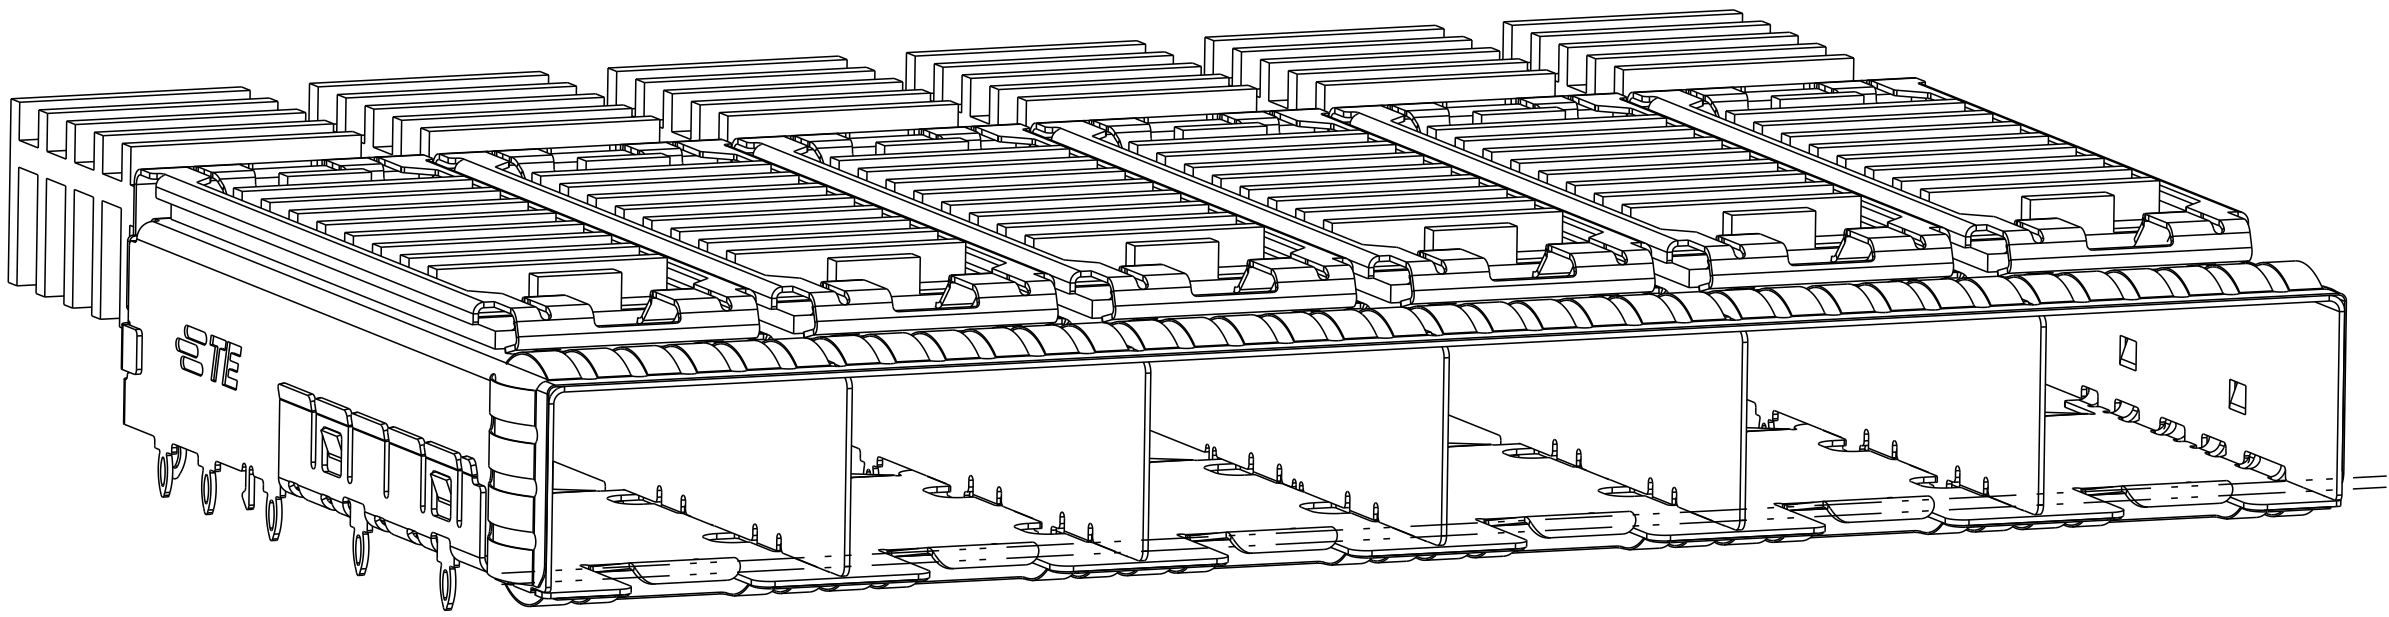


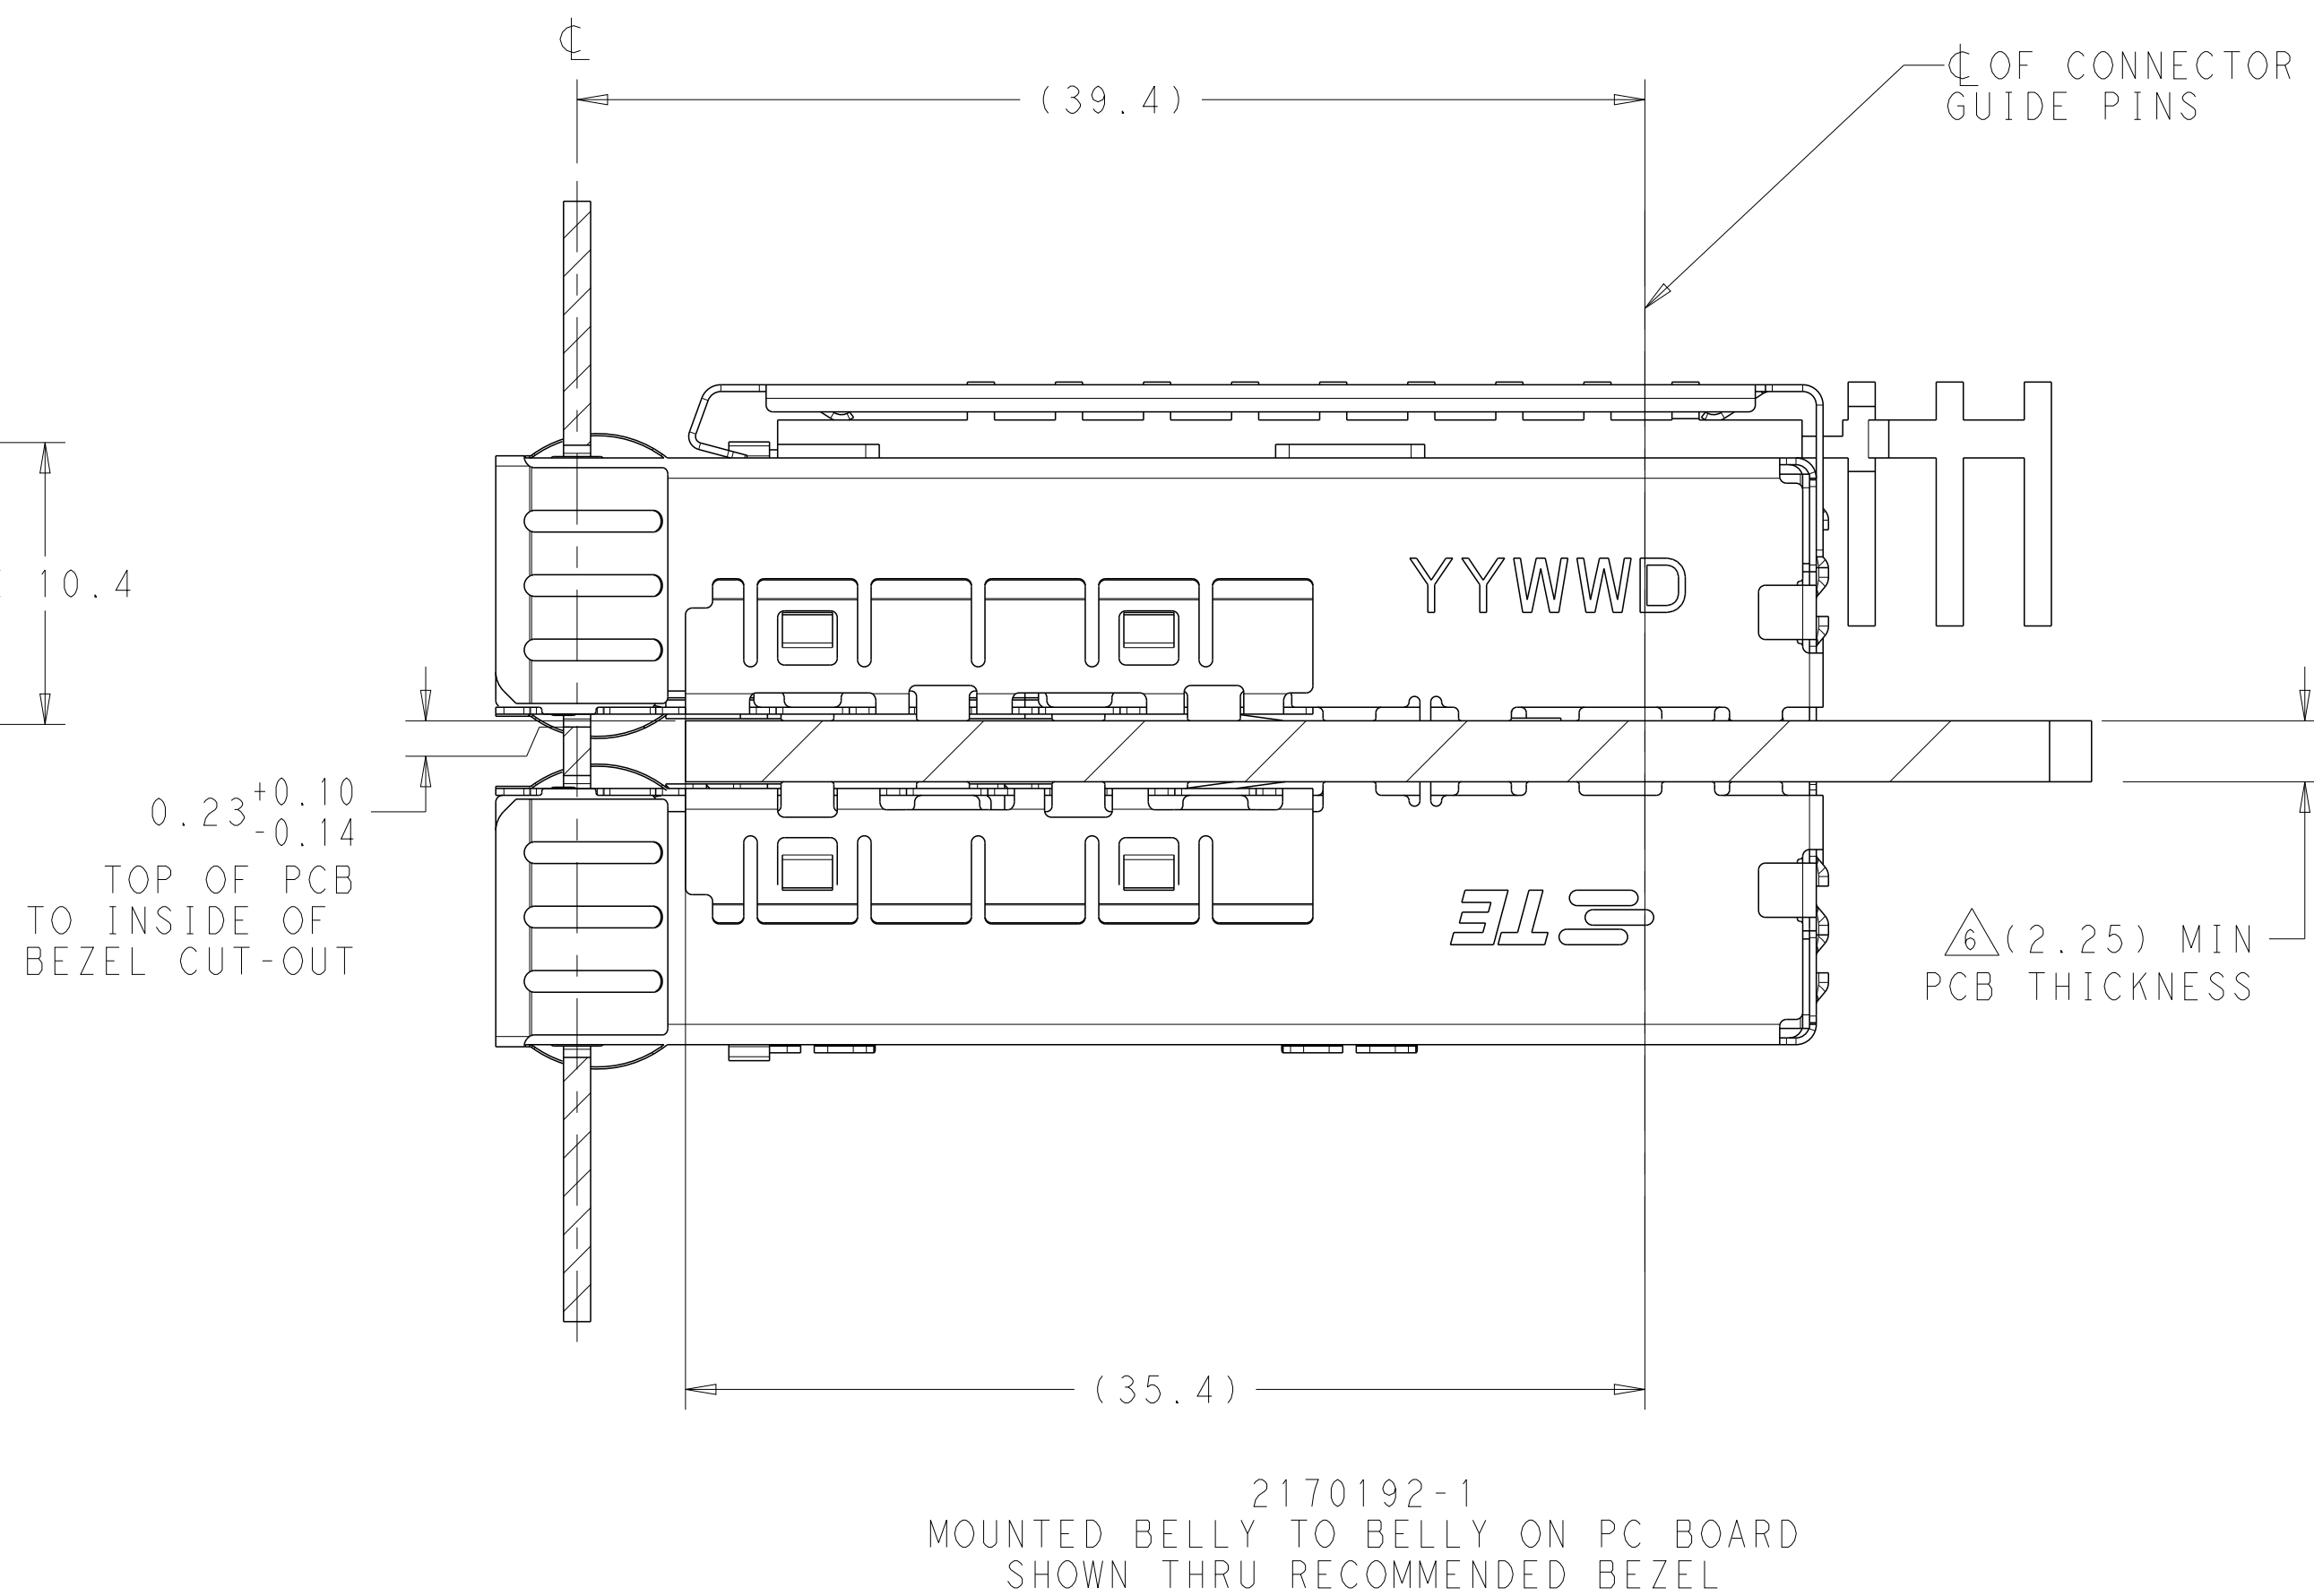
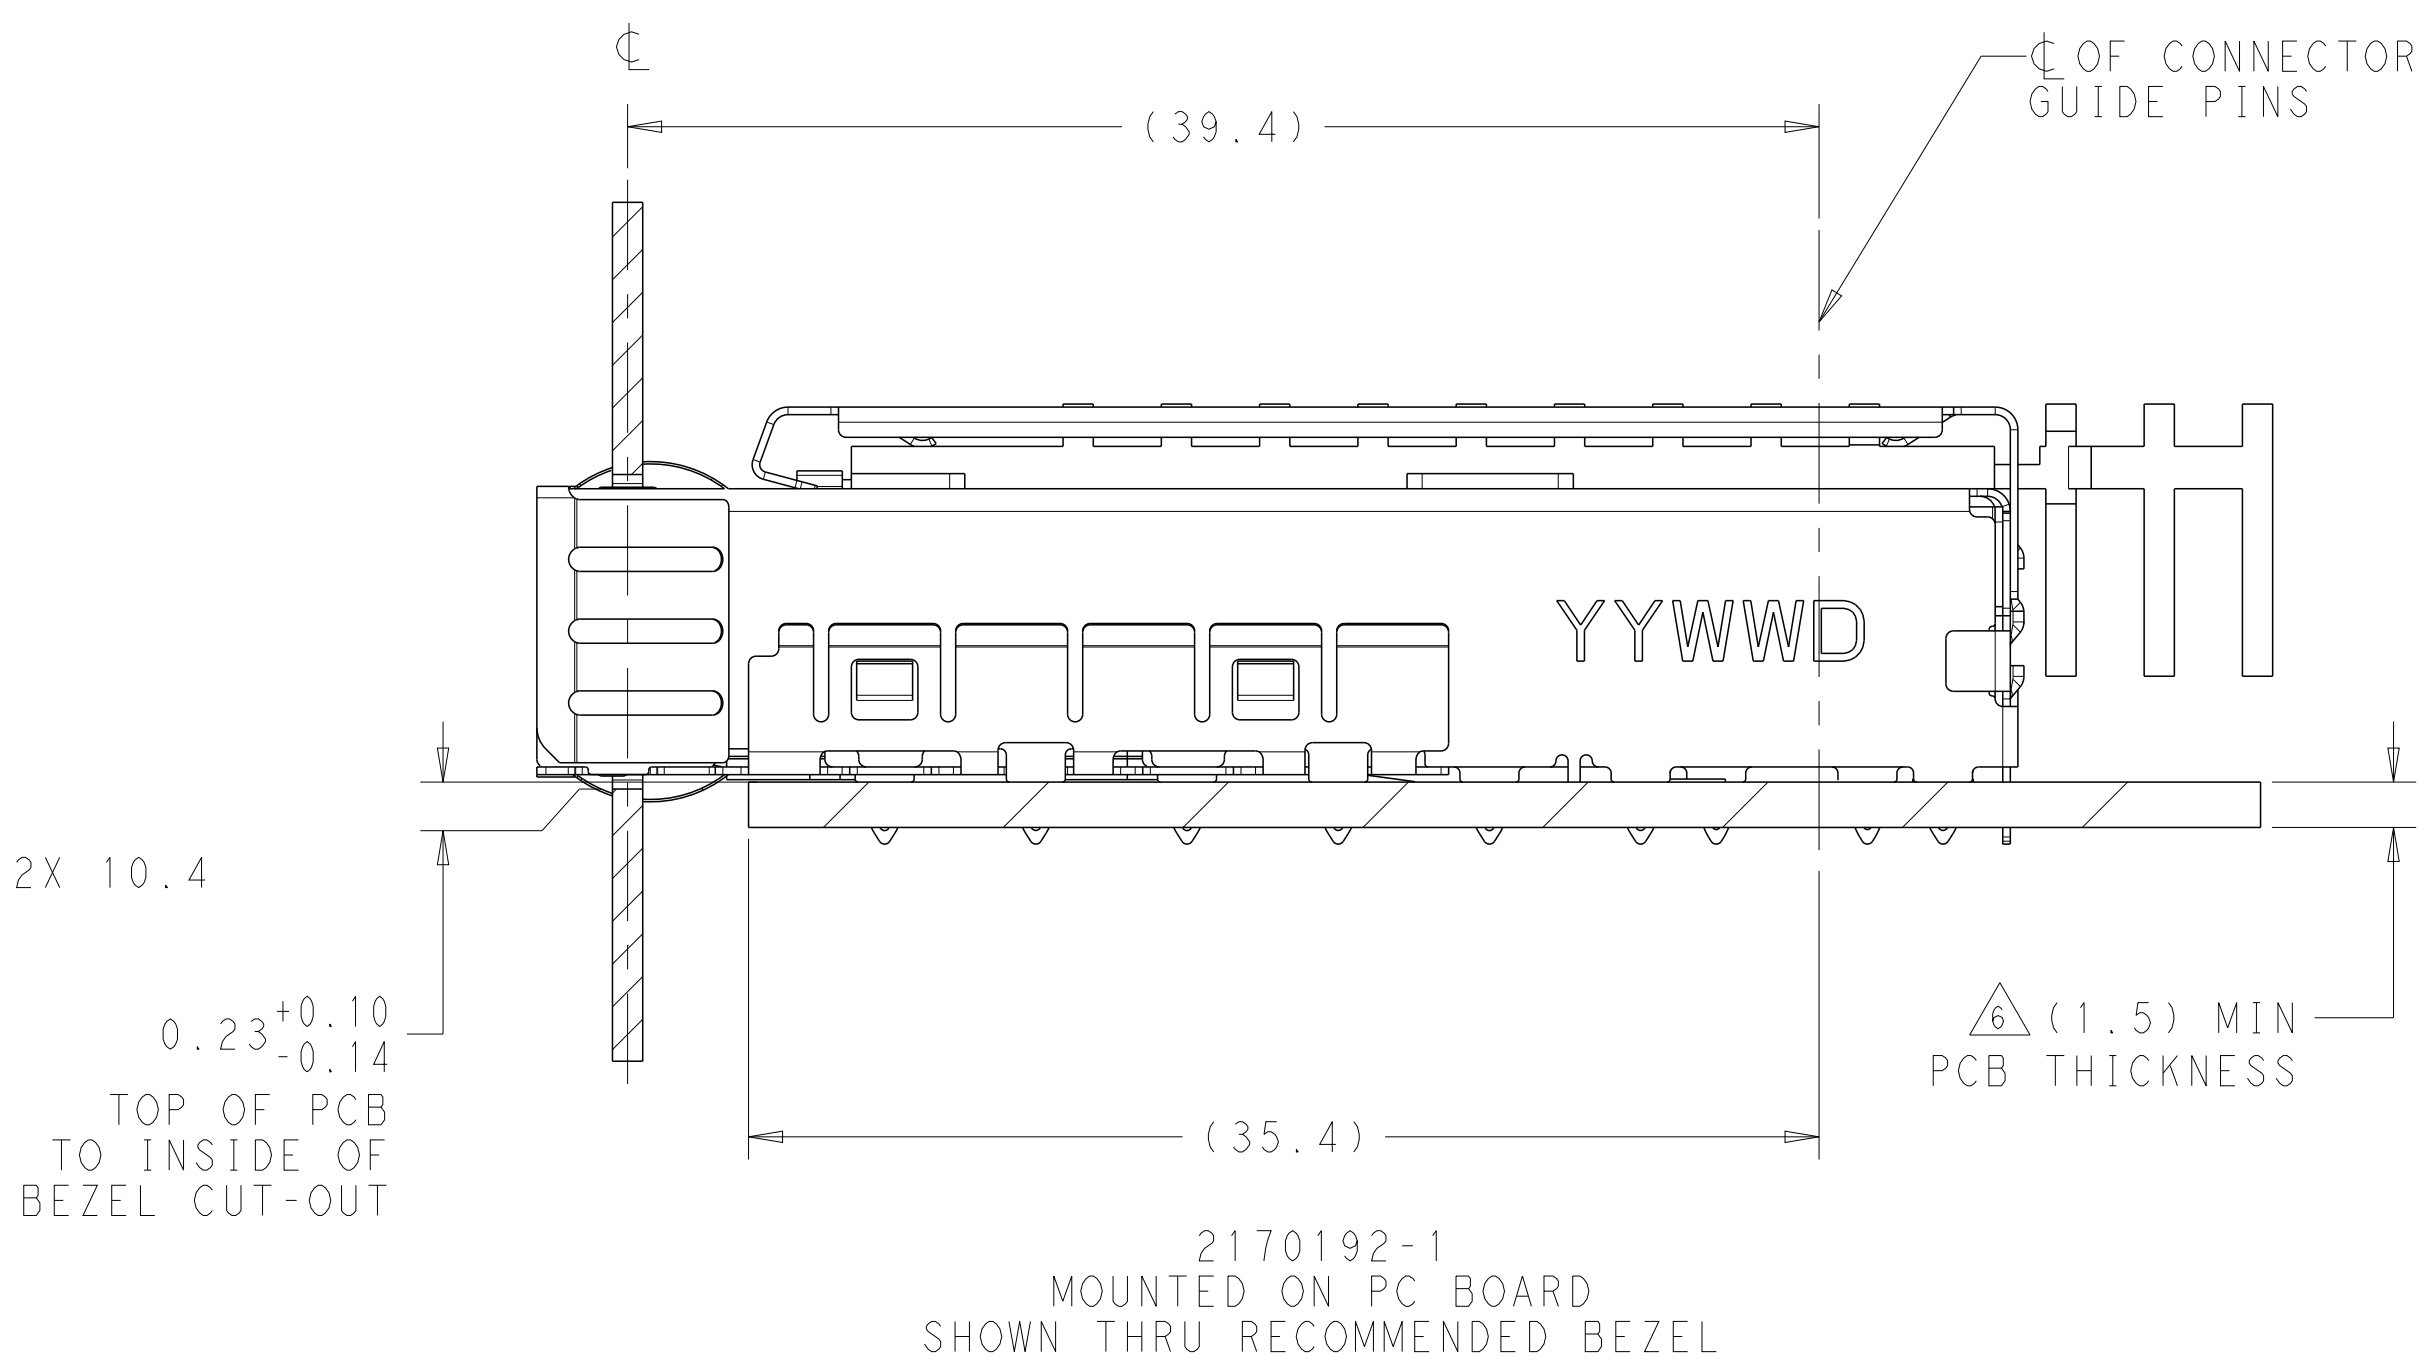
2170192-3 AS SHOWN



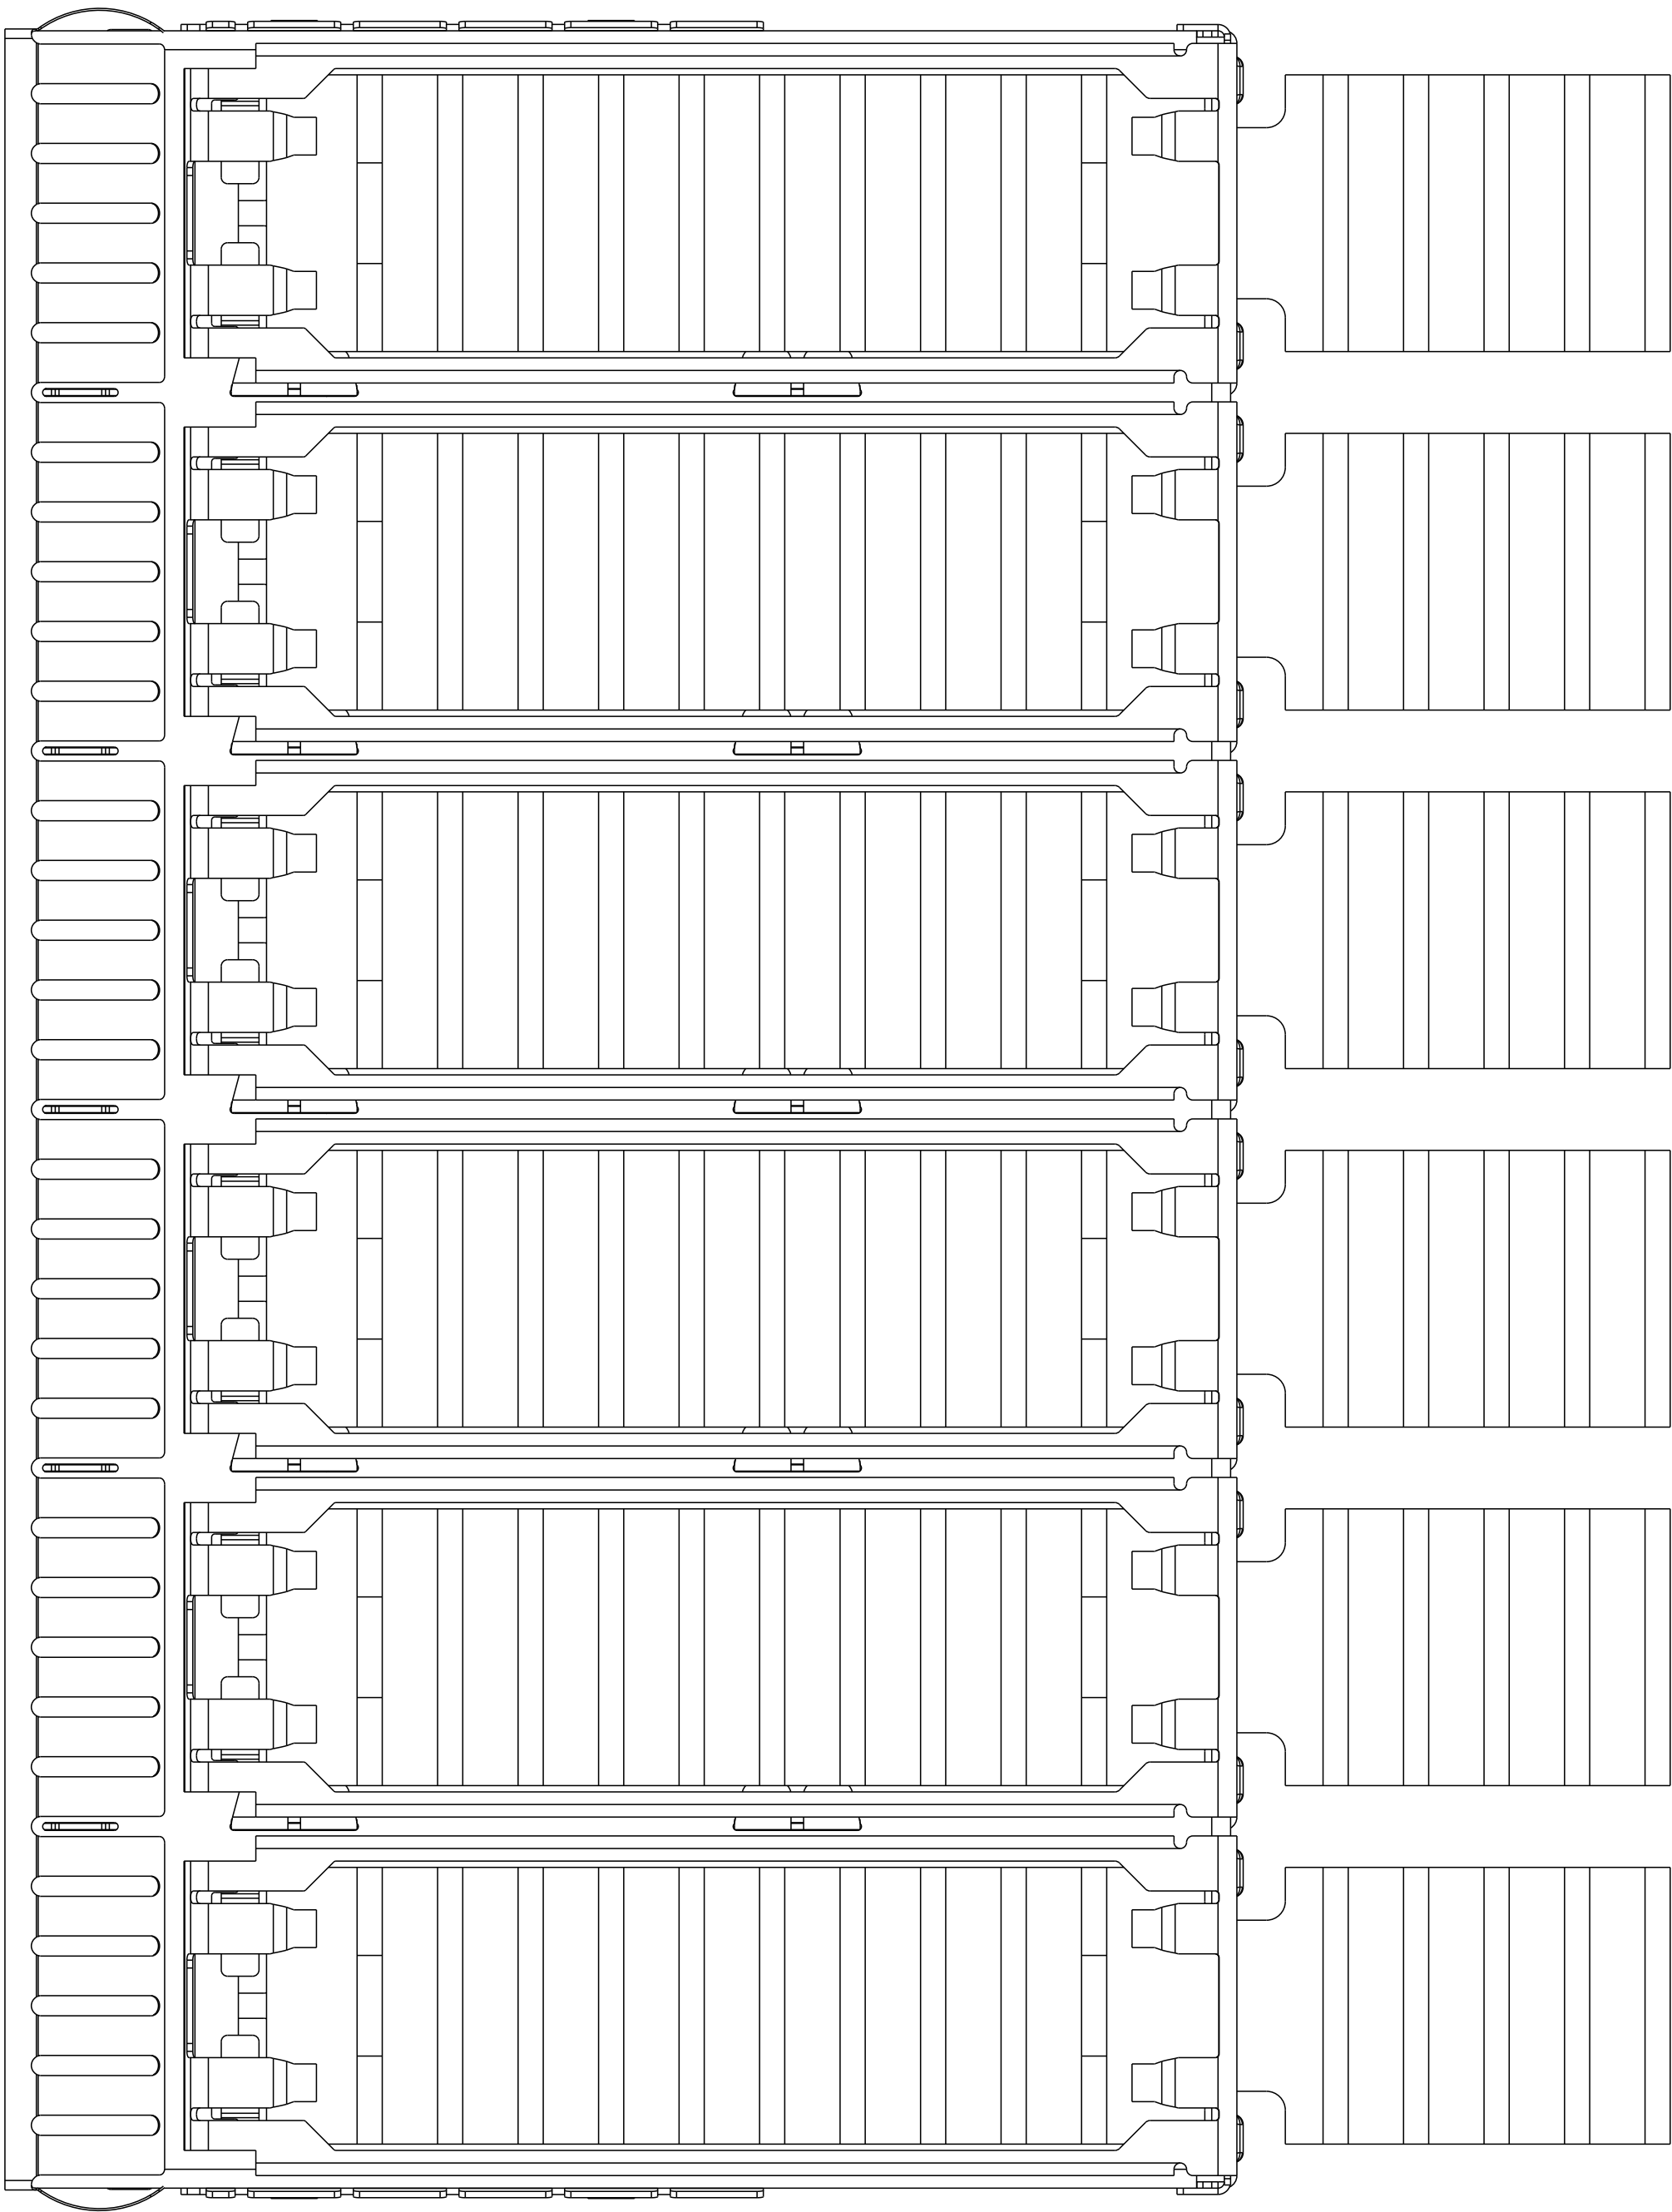



2170192-3 AS SHOWN

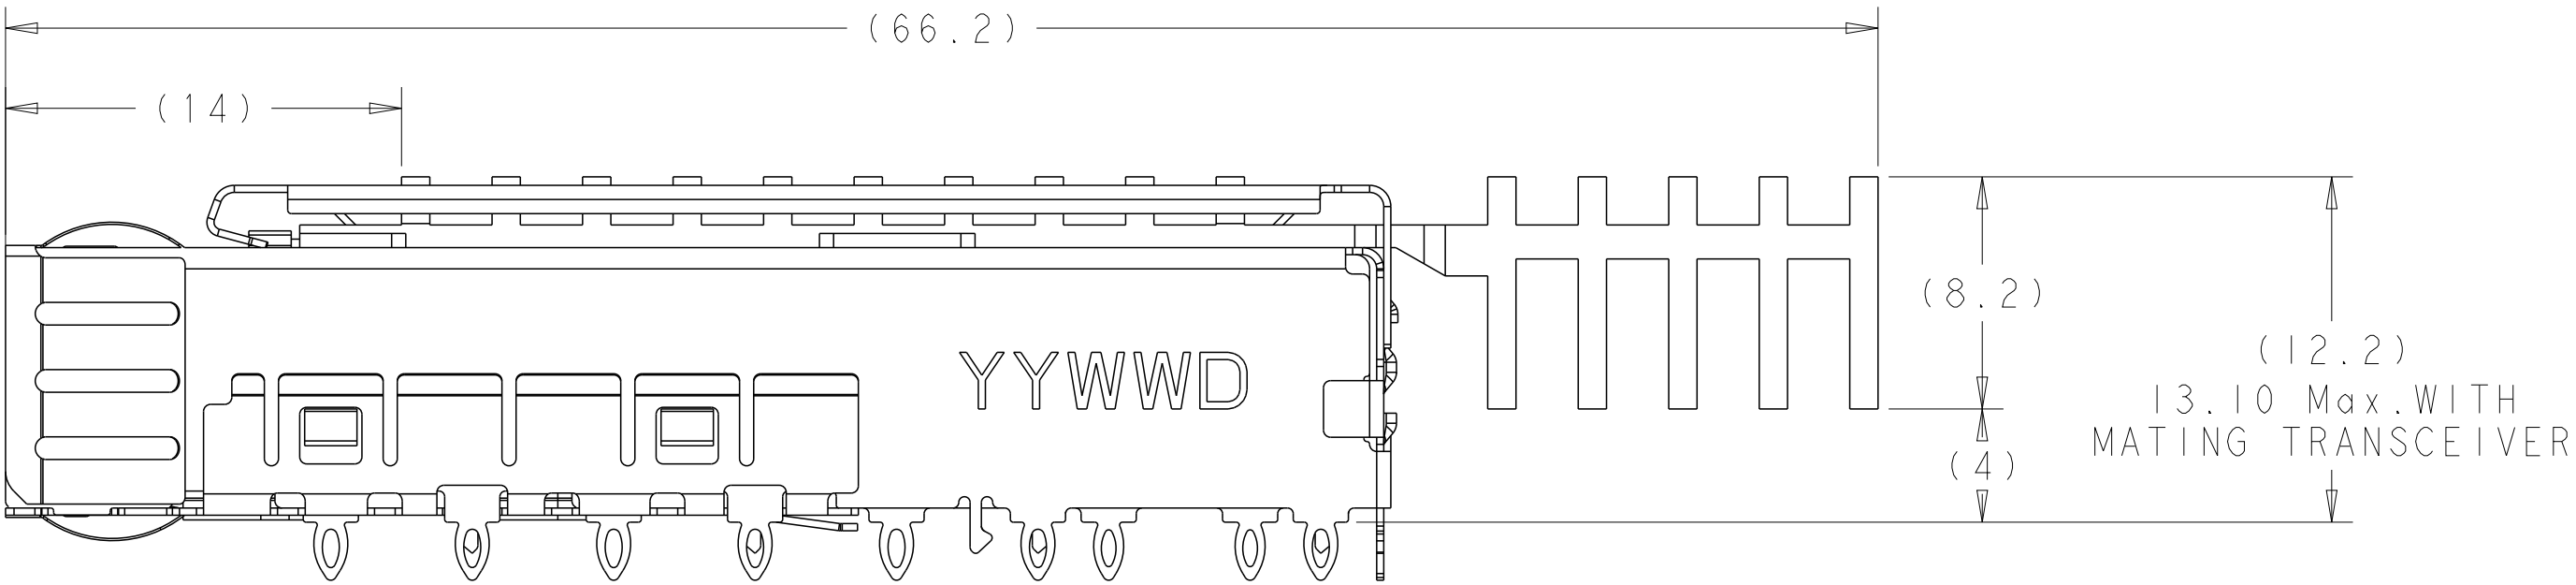

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN	TIM XUE	22NOV2011	 TE Connectivity	
		CHK	ALEX CAI	22NOV2011		
		APVD	ALEX CAI	22NOV2011	NAME	
		PRODUCT SPEC			SFP+ ENHANCED 1X6 CAGE ASSEMBLY, PRESS FIT, EXTERNAL EMI SPRINGS WITH HEATSINK	
		APPLICATION SPEC			SIZE	
		WEIGHT			CAGE CODE	
		DRAWING NO			RESTRICTED TO	
		Customer Drawing			A100779C=2170192	
		SCALE			SHEET	
		4:1			2 OF 5	
					REV	
					A2	



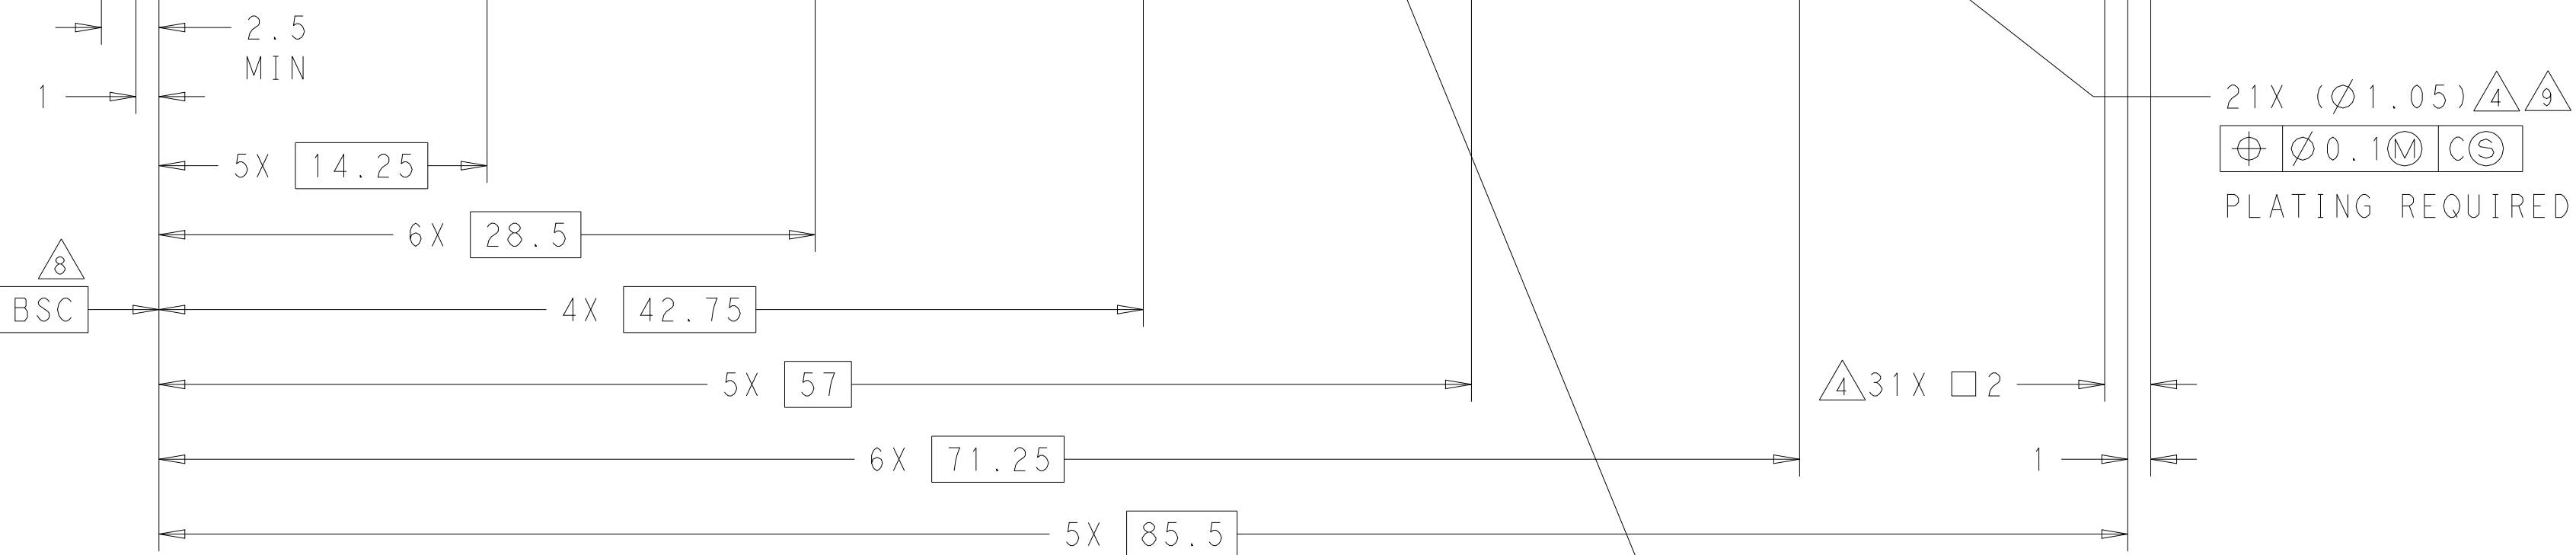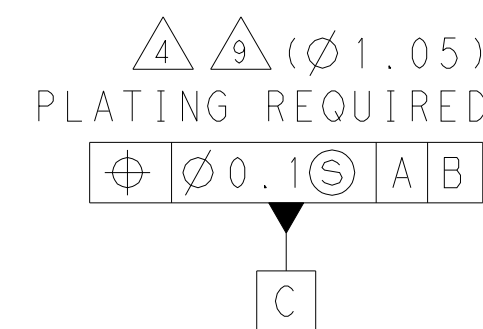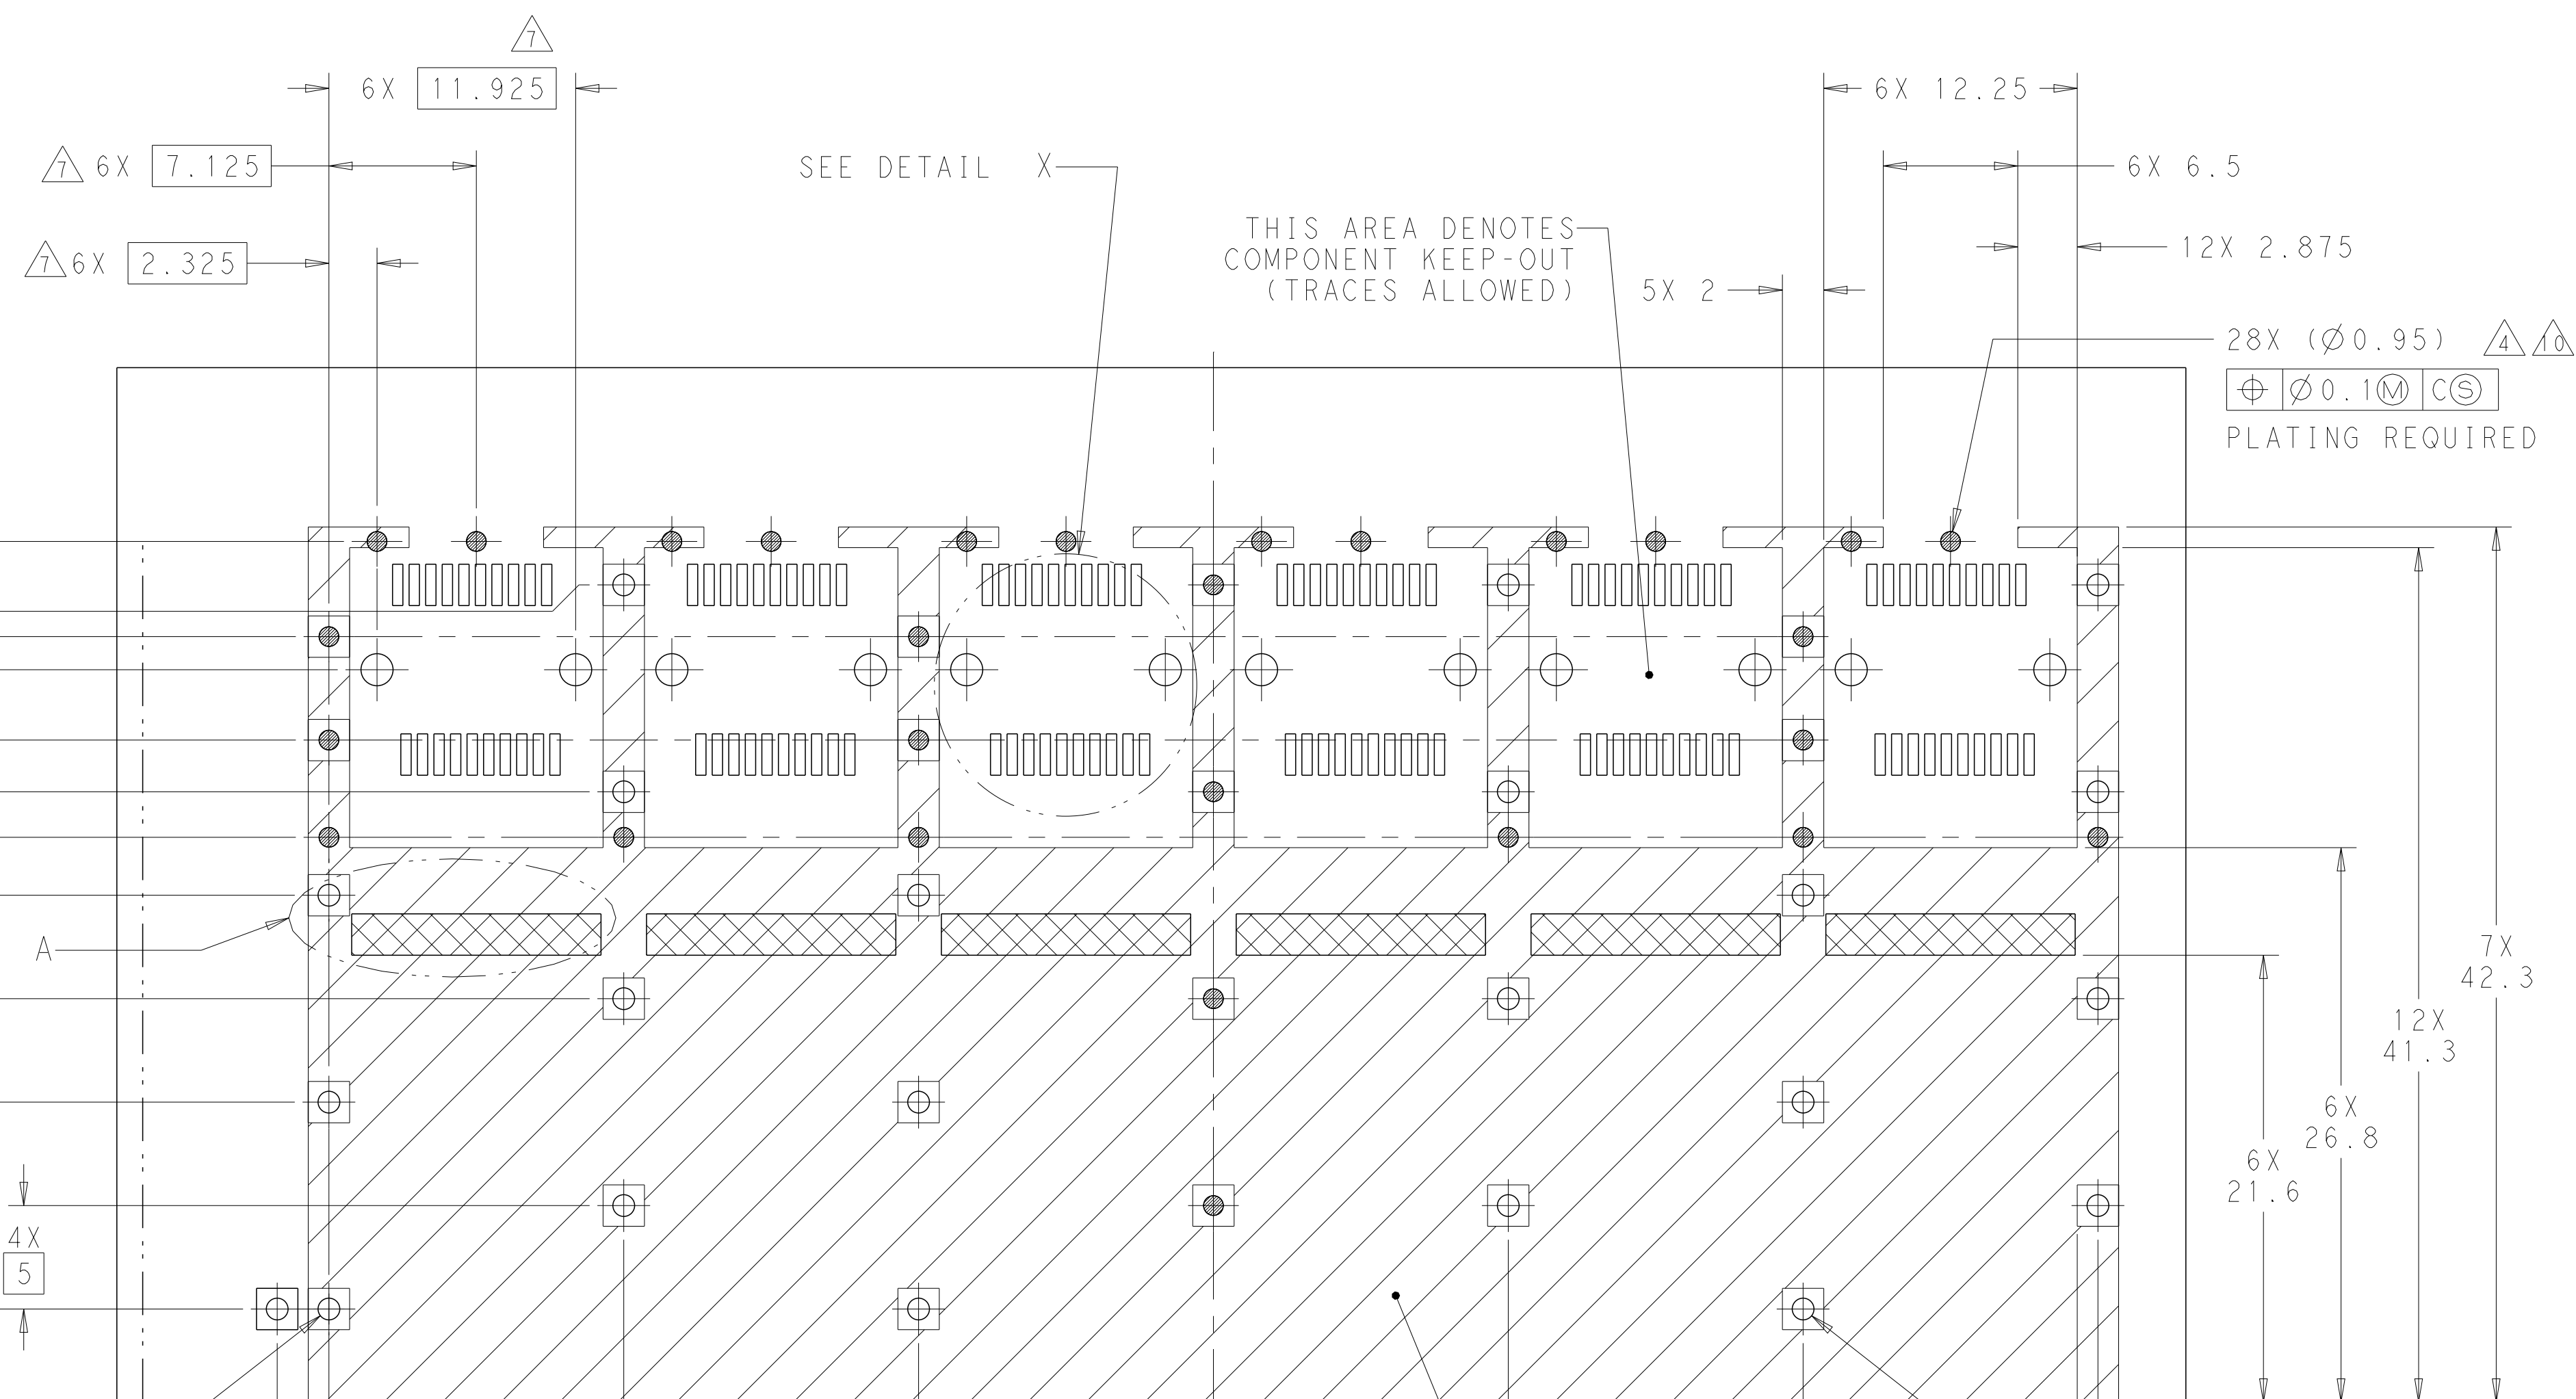

RECOMMENDED PCB CONFIGURATION
WITH KEEP-OUT AREAS
SINGLE SIDED APPLICATIONS
SCALE 4:1 

—CROSS-HATCHED AREA
DENOTES COMPONENT
AND TRACE KEEP-OUT
(EXCEPT CHASSIS
GROUND)

4805 (3/11)

