

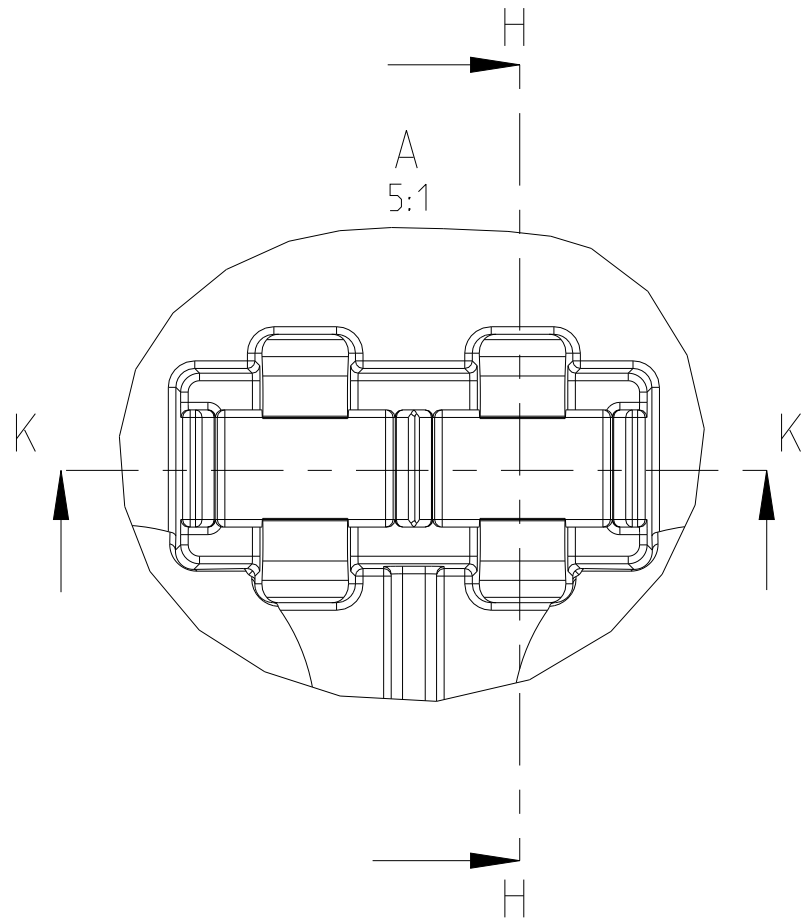
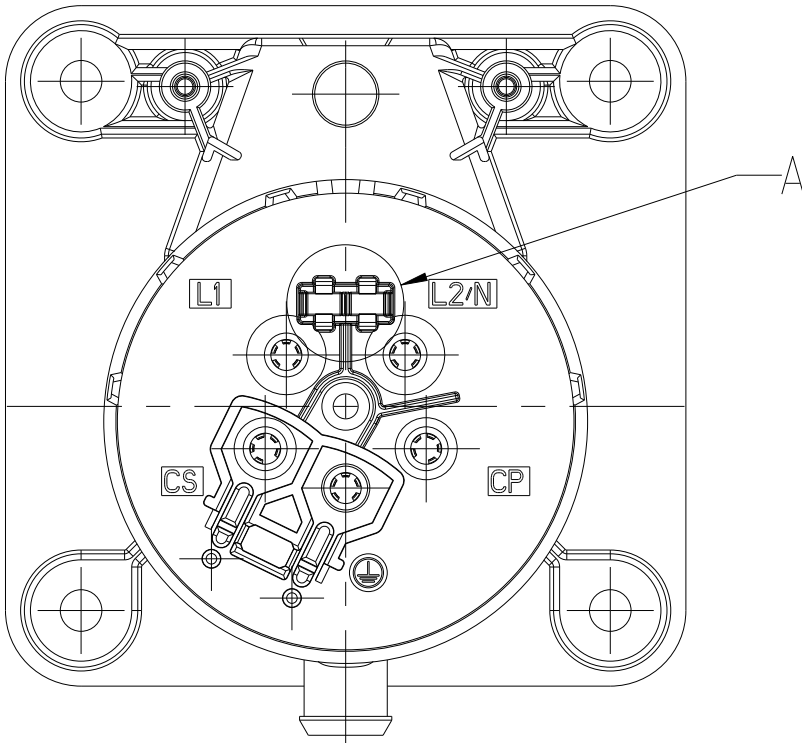
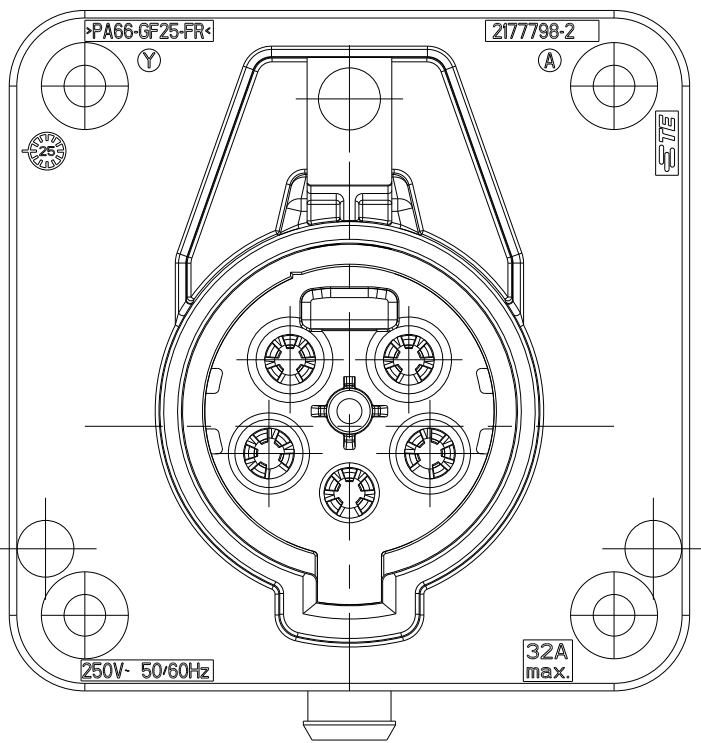
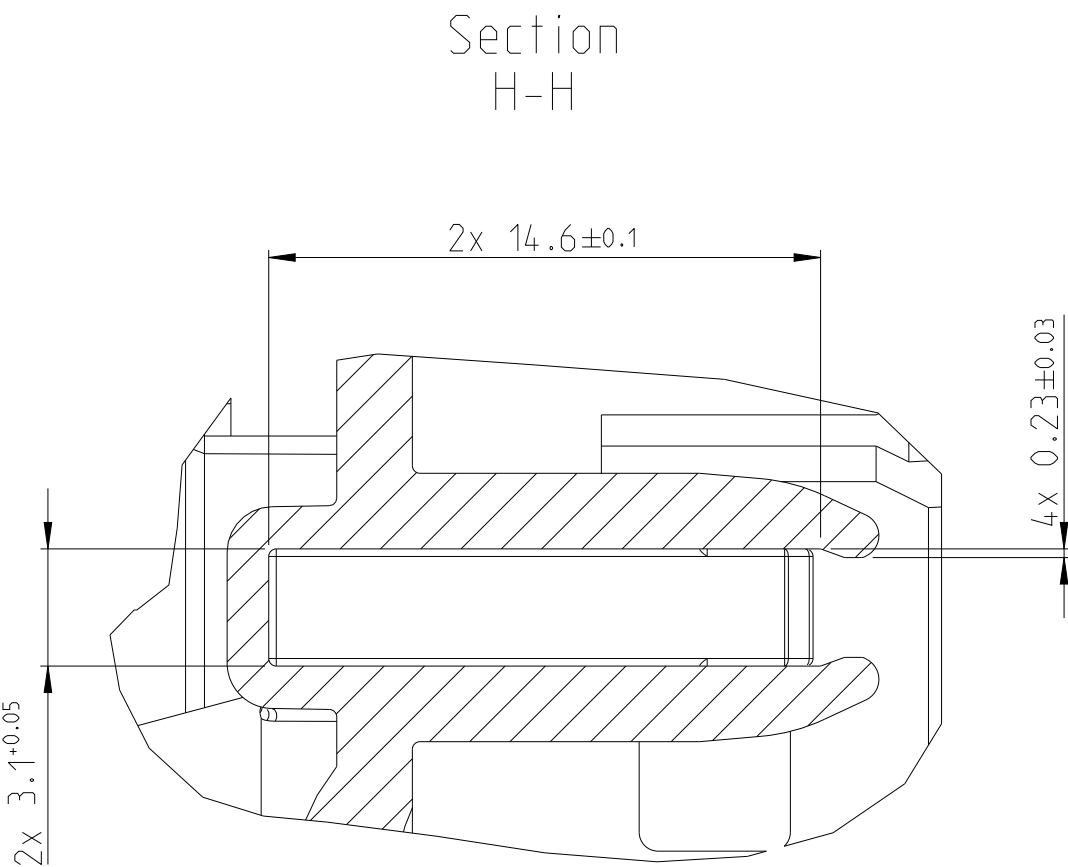
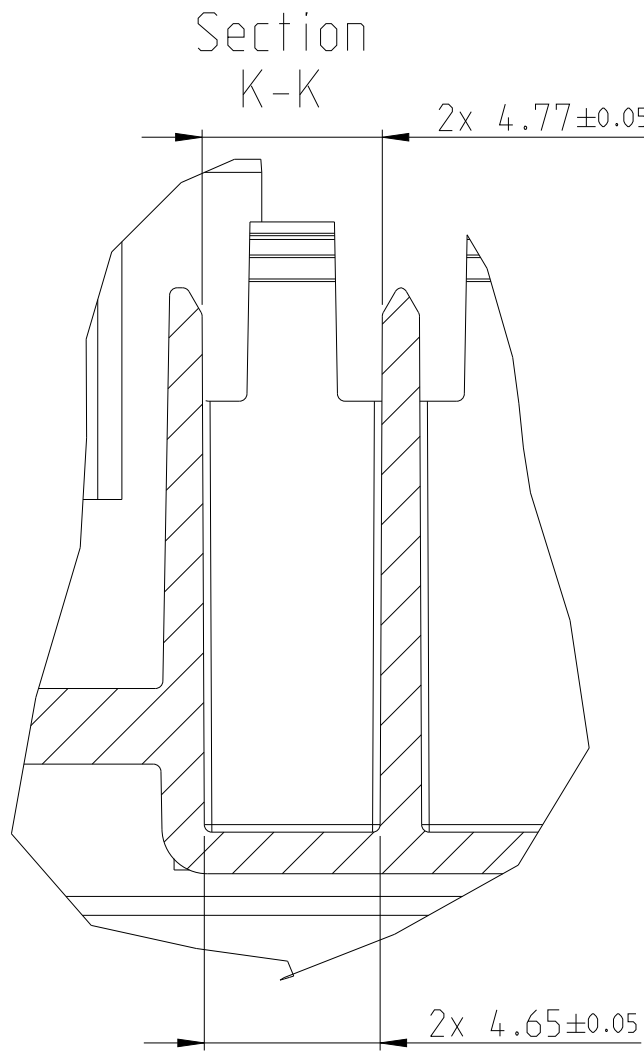



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

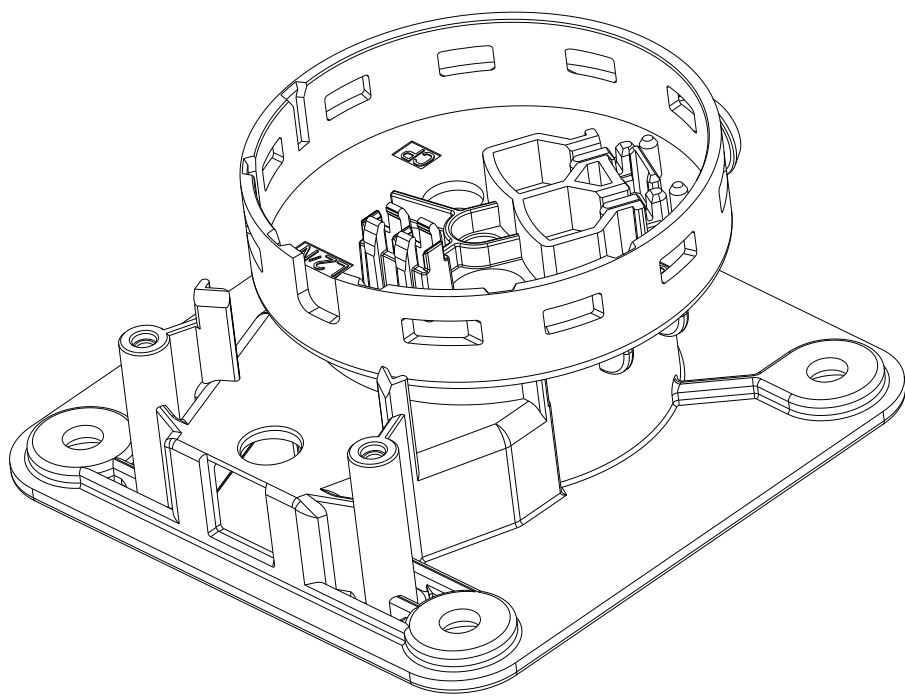

REFER 2177798-1 FOR OTHER RELEVANT DIMENSIONS & VIEWS

-AS SHOWN-
O-2177798-2

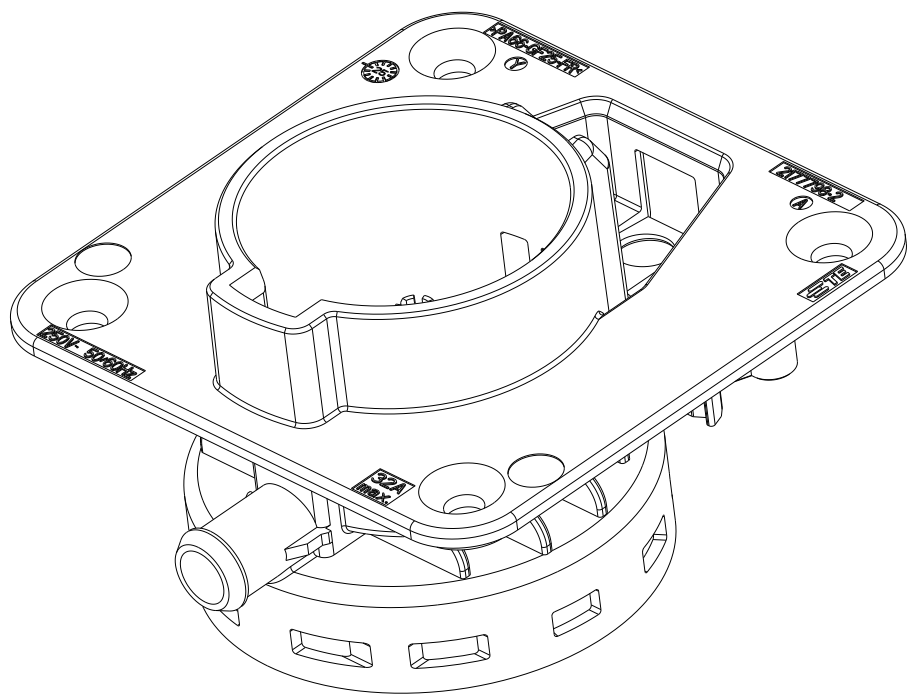

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).		DWN: 19MAR2012 Vishwa A		 TE Connectivity	
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		CHK: 03APR2012 F. Wittrock			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± DIN 16742 1 PLC ± TG5 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		NAME: 5POS. MIXED, HSG, IEC62196-2 TYPE 1 5pol. Gehäuse, Ladedose IEC62196-2 Type 1	
		APVD: 10APR2012 D. Weyrauch PRODUCT SPEC		SIZE: A CAGE CODE: 00779 DRAWING NO: C=2177798	
MATERIAL: -		APPLICATION SPEC: -		RESTRICTED TO: -	
-		WEIGHT: 72.58 g		-	
-		CUSTOMER DRAWING		SCALE: 1:1	
-				SHEET 2 OF 2	
				REV: C 1	