




KEY CODE "G"  
SCALE 4:1



1. CAP ASSEMBLY IS SHIPPED WITH TPA IN PRE-STAGED POSITION. SEE INSTRUCTION SHEET 408-32094 FOR CONNECTOR SERVICE AND TPA OPERATION.
2. TERMINALS SOLD SEPARATELY. FOR USE WITH TE MCON 1.2mm CLEAN BODY TAB CONTACT WITH WIRE SEAL. SEE TABLE.
3. FOR OPTIONAL TERMINAL CAVITY BLOCKING, CONTACT TE SALES REPRESENTATIVE OR CUSTOMER SERVICE.
4. CONTACT PLATING AND APPLICABLE INDIVIDUAL WIRE SEAL ARE APPLICATION DEPENDENT. CONTACT TE SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR DETAILS.
5. FOR WIRE CRIMP DETAILS, SEE TE APPLICATION SPECIFICATION 114-18464.
6. DOCUMENTED I.C.D. IS SPECIFIED TO MEET MOST WIRE SEAL APPLICATIONS. HOWEVER, I.C.D. IS HIGHLY DEPENDENT ON INSULATION TYPE AND OD. SUFFICIENT GRIP OF THE WIRE SEAL MUST BE OBTAINED SUCH THAT WIRE SEAL DOES NOT DISPLACE FROM INSULATION GRIP DURING CONTACT INSERTION INTO CONNECTOR HOUSING. THE WIRE SEAL SHALL NOT BE CRIMPED TOO TIGHTLY THAT THE WIRE SEAL TEARS DURING THE CRIMPING OPERATION.
7. CAP ASSEMBLY ACCEPTS ACCESSORY CLIPS DESIGNED TO FUNCTION IN CLIP SLOT DEFINED BY EWCAP-005-7, REVISION A.
8. CONNECTOR VALIDATION PER USCAR-2, REVISION 6 - T4,V4,S3.
9. TRACEABILITY CODE YY = TWO DIGIT YEAR, JJJ = 3 DIGIT JULIAN DAY, S = 1 DIGIT SHIFT.
10. KEY CODE NOT TOOLED.
11. PRELIMINARY - NOT RELEASED FOR PRODUCTION

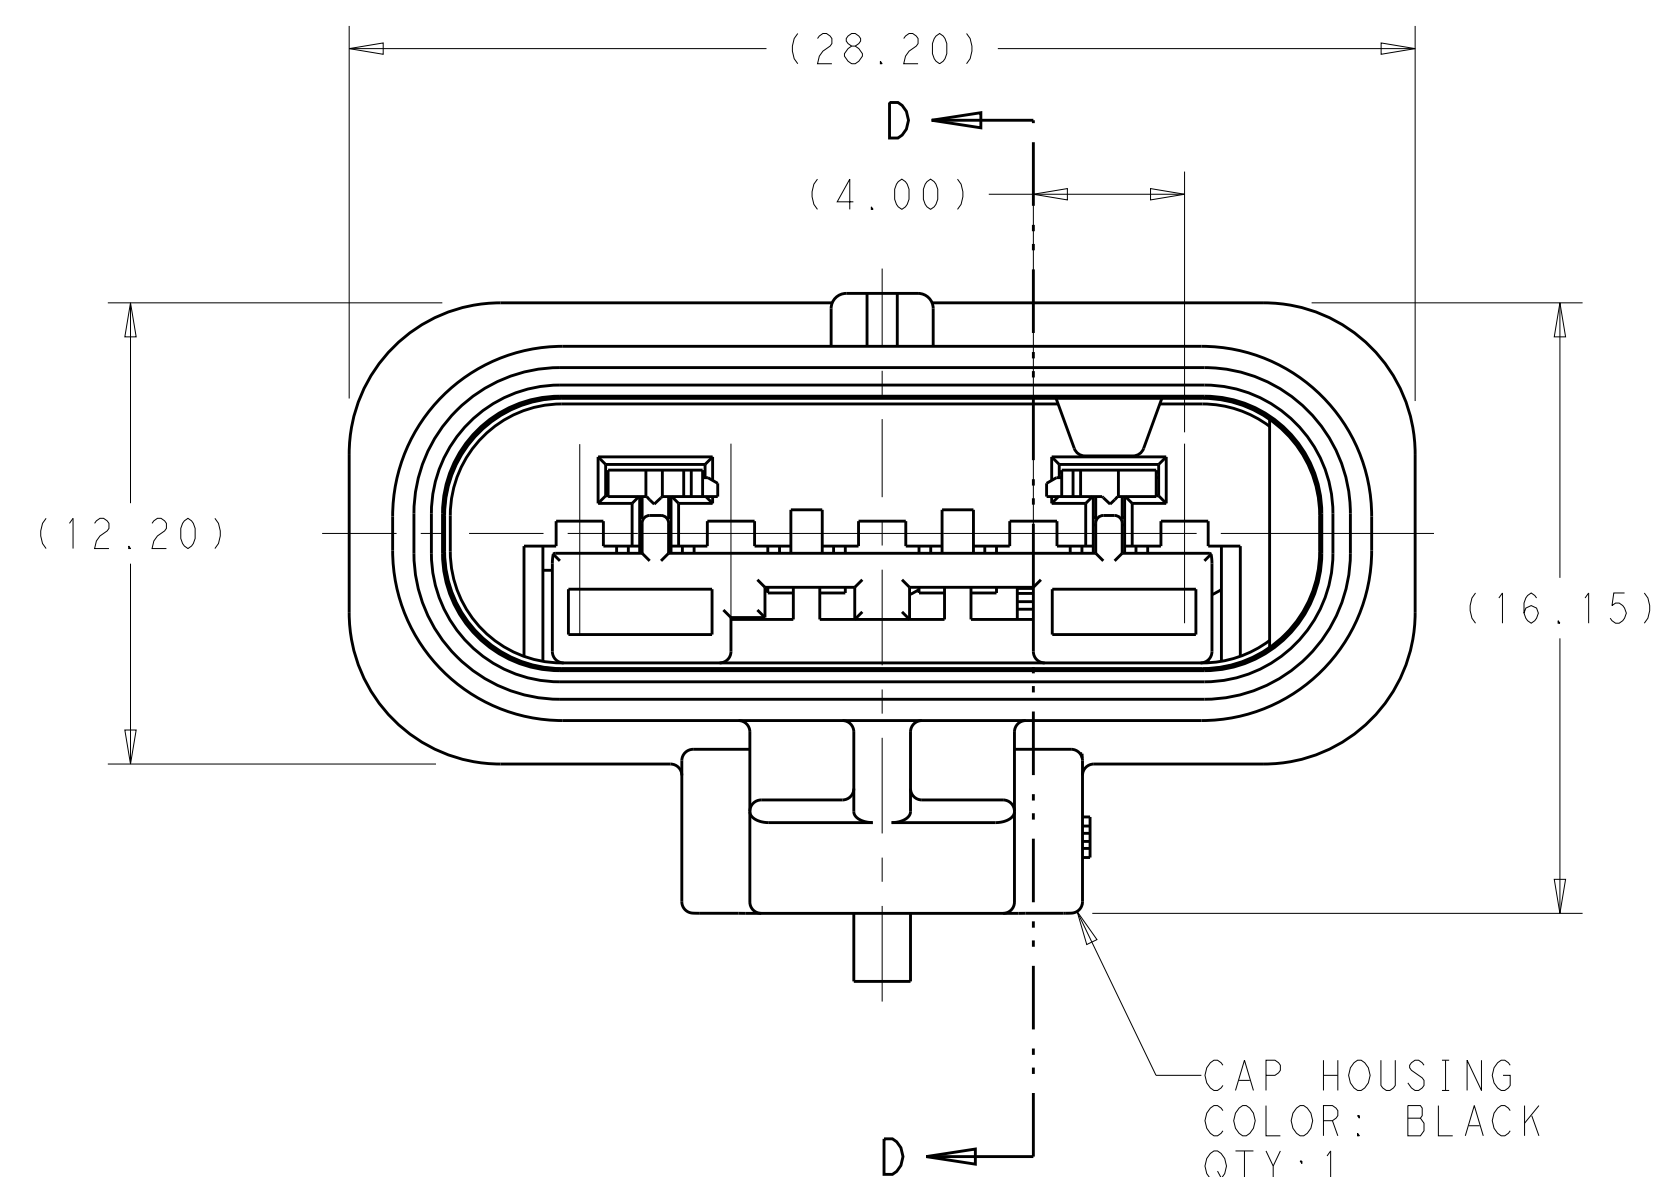

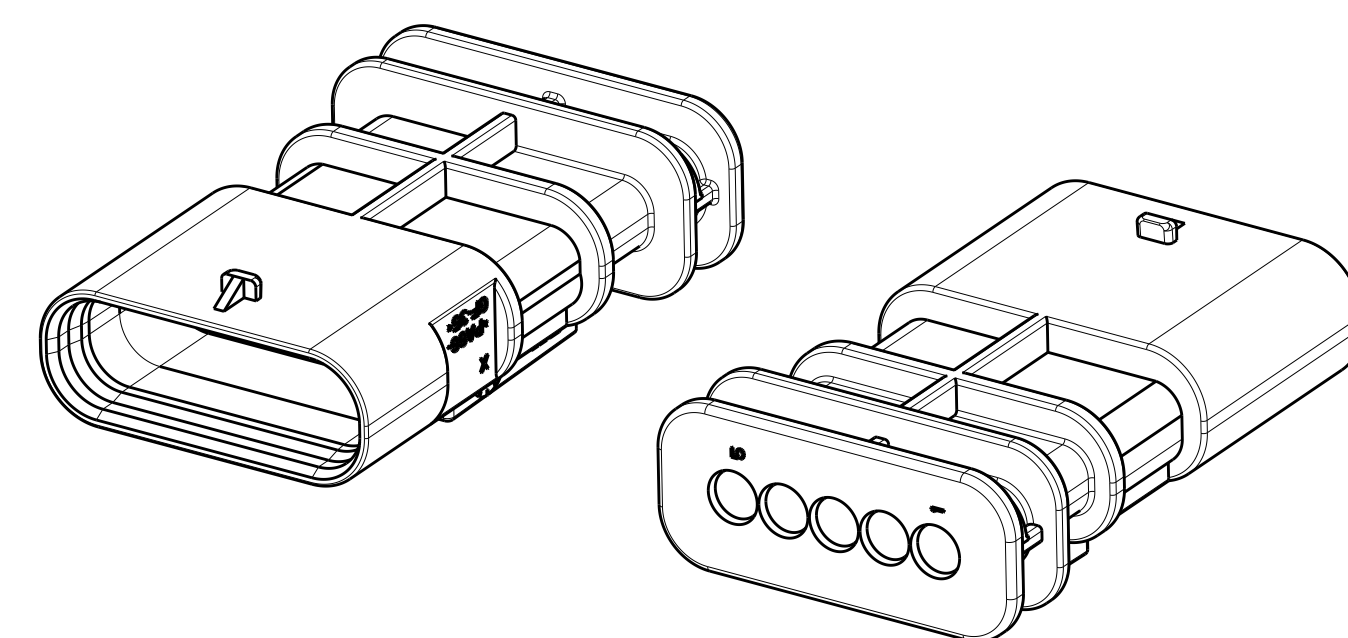

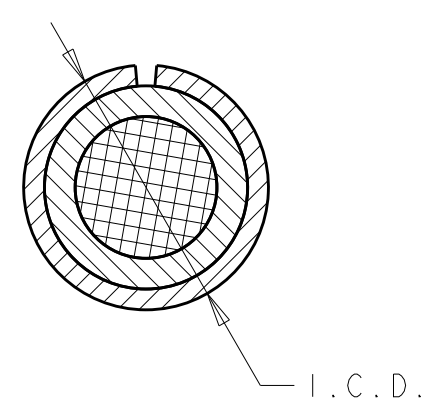









ISOMETRIC VIEWS  
SCALE 2:1



## WIRE CRIMP DIMENSIONS

## INSULATION CRIMP DIMENSIONS

150°C	2141114	1.40 - 1.90mm			 	2098582-1
	2141116	1.40 - 1.90mm				2098582-1
125°C	2141114	1.40 - 1.90mm			 	967067-1
	2141116	1.40 - 1.90mm				967067-1
	2177610	1.90 - 2.40mm				964972-1
MAX TEMP 	MALE TERMINAL P/N	APPLICABLE WIRE FINISHED O.D.	W.C.H	W.C.W	I.C.D	WIRE SEAL  PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRAWN MD. BROWN	240C12013	 TE Connectivity	
DIMENSIONS: mm		CHECKED MD. BROWN	240C12013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED MD. BROWN	240C12013	NAME	
		PRODUCT SPEC		CAP ASSEMBLY, 5 POSITION, MCON	
		APPLICATION SPEC			
MATERIAL	FINISH	WEIGHT	SIZE CAGE CODE DRAWING NO		RESTRICTED TO
-	-	-	A100779C=2203776		-
CUSTOMER DRAWING			SCALE	SHEET 1 OF 1	REV. A