

- △

CAP ASSEMBLY IS SHIPPED WITH TPA IN PRE-STAGED POSITION. SEE INSTRUCTION SHEET 408-32094 FOR CONNECTOR SERVICE AND TPA OPERATION.
2.

TERMINALS SOLD SEPARATELY. FOR USE WITH TE MCON 1.2mm CLEAN BODY TAB CONTACT WITH WIRE SEAL. SEE TABLE.
3.

FOR OPTIONAL TERMINAL CAVITY BLOCKING, CONTACT TE SALES REPRESENTATIVE OR CUSTOMER SERVICE.
- △4

CONTACT PLATING AND APPLICABLE INDIVIDUAL WIRE SEAL ARE APPLICATION DEPENDENT. CONTACT TE SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR DETAILS.
- △5

FOR WIRE CRIMP DETAILS, SEE TE APPLICATION SPECIFICATION 114-18464.
- △6


DOCUMENTED I.C.D. IS SPECIFIED TO MEET MOST WIRE SEAL APPLICATIONS. HOWEVER, I.C.D. IS HIGHLY DEPENDENT ON INSULATION TYPE AND OD. SUFFICIENT GRIP OF THE WIRE SEAL MUST BE OBTAINED SUCH THAT WIRE SEAL DOES NOT DISPLACE FROM INSULATION GRIP DURING CONTACT INSERTION INTO CONNECTOR HOUSING. THE WIRE SEAL SHALL NOT BE CRIMPED TOO TIGHTLY THAT THE WIRE SEAL TEARS DURING THE CRIMPING OPERATION.
7.

CAP ASSEMBLY ACCEPTS ACCESSORY CLIPS DESIGNED TO FUNCTION IN CLIP SLOT DEFINED BY EWCAP-005-7, REVISION A.
8.





NOTE REMOVED
9.

TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = 3 DIGIT JULIAN DAY, S = 1 DIGIT SHIFT).
- △10

NOTE REMOVED

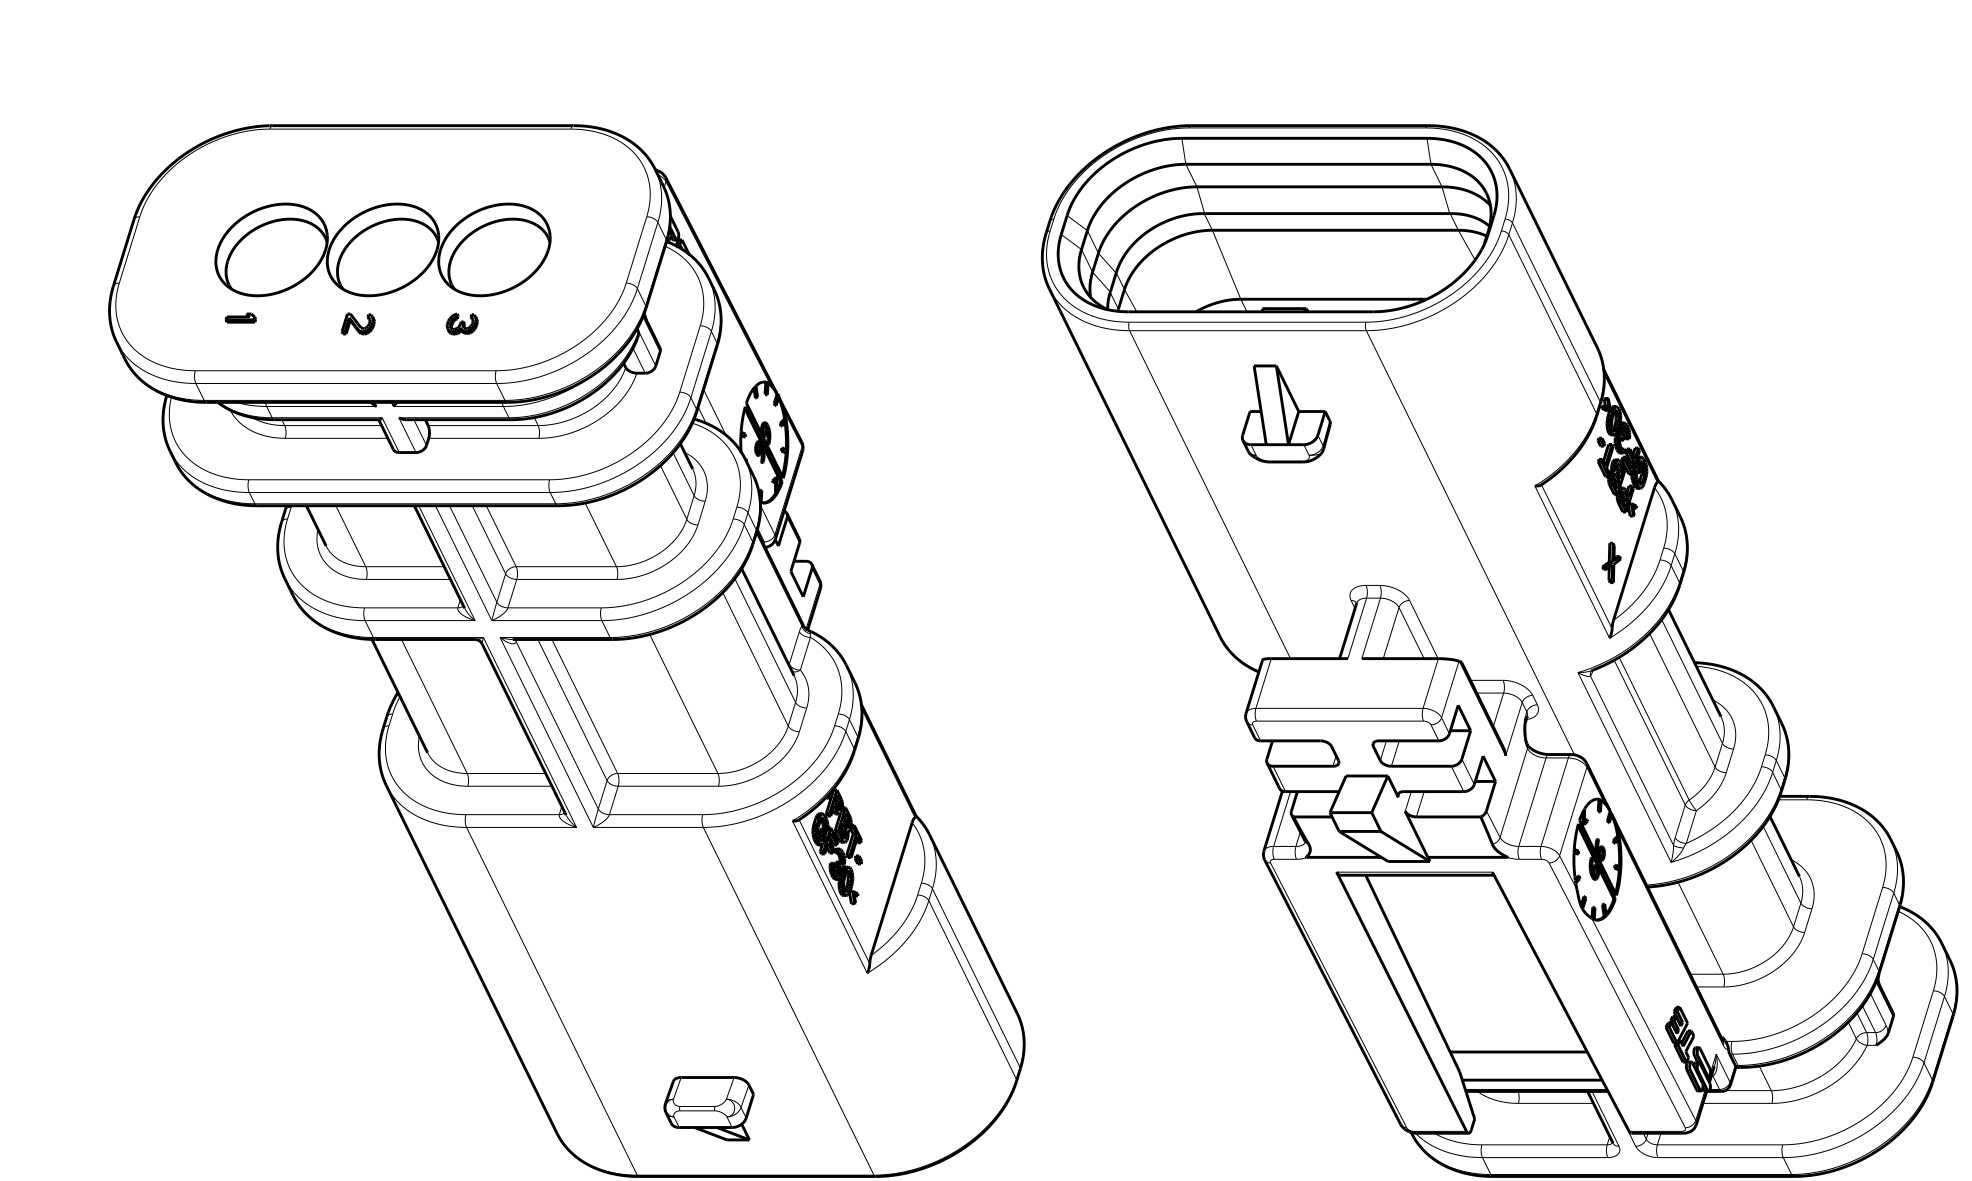


ISOMETRIC VIEWS
SCALE 4:1

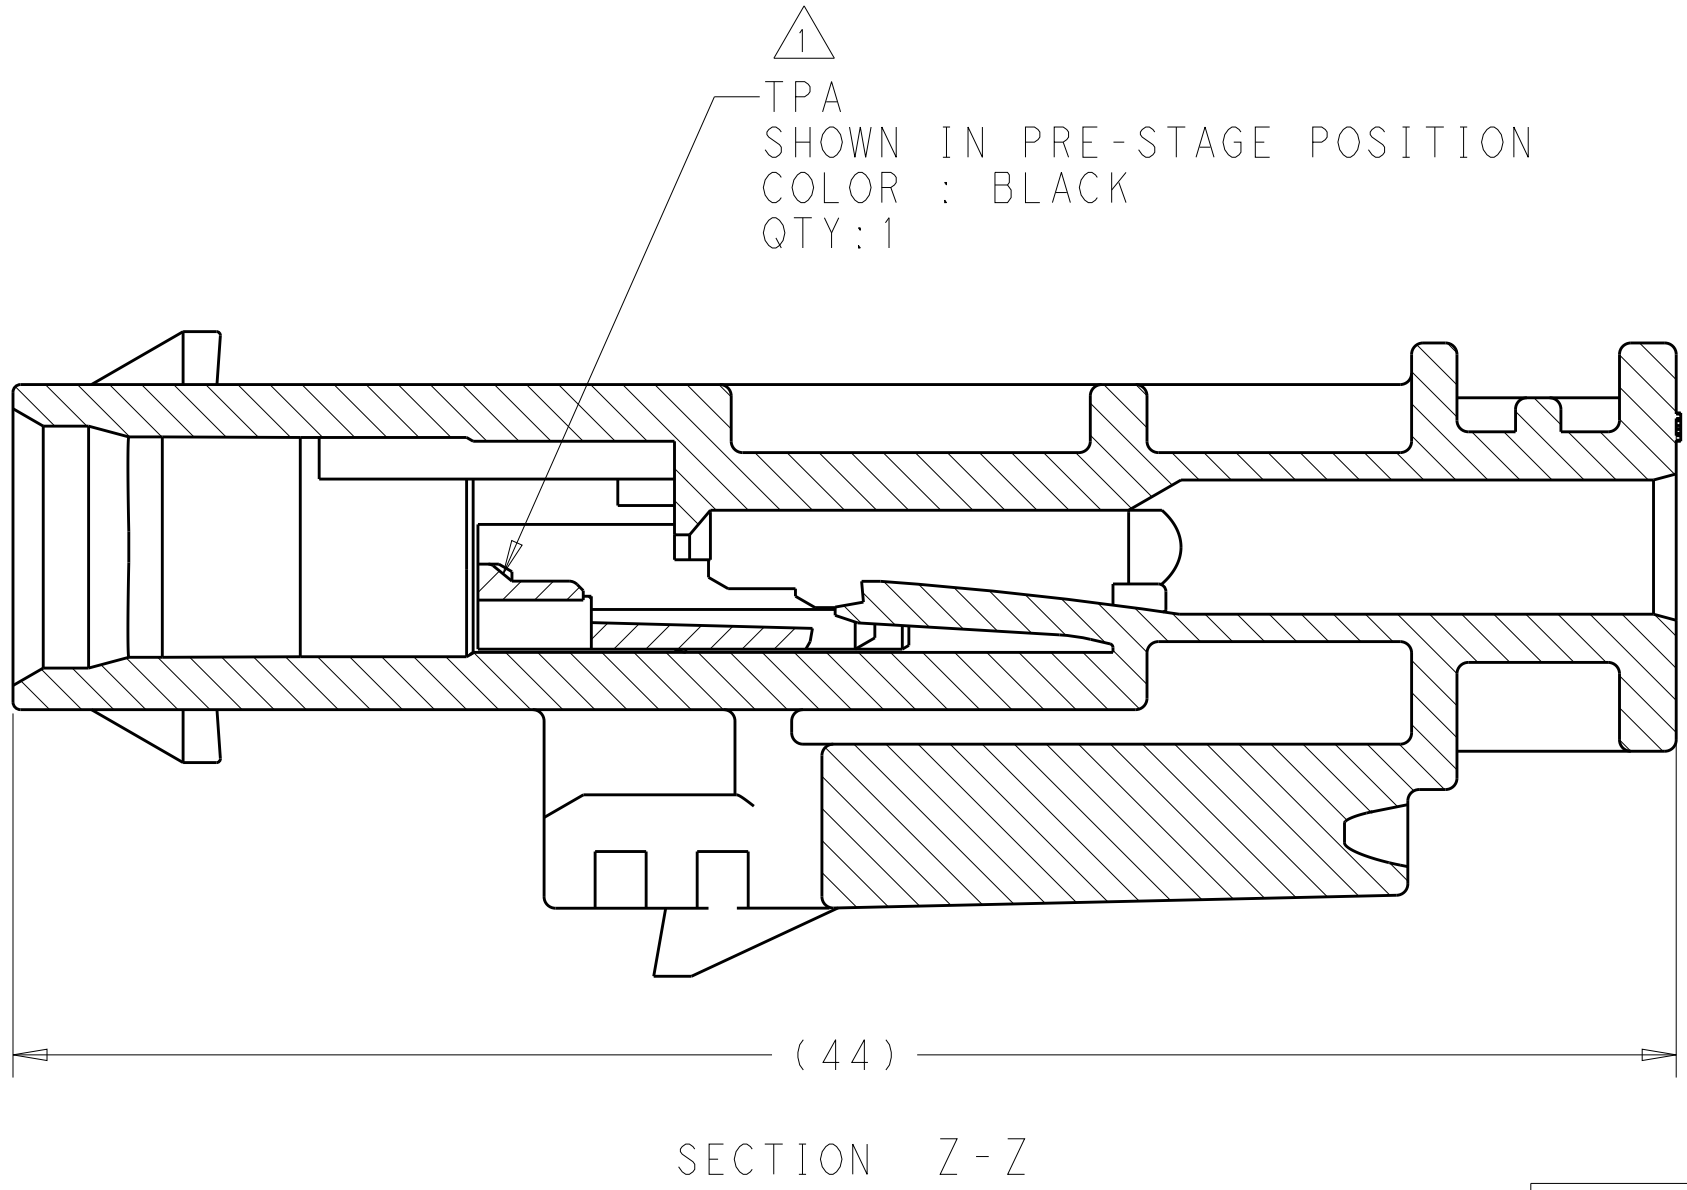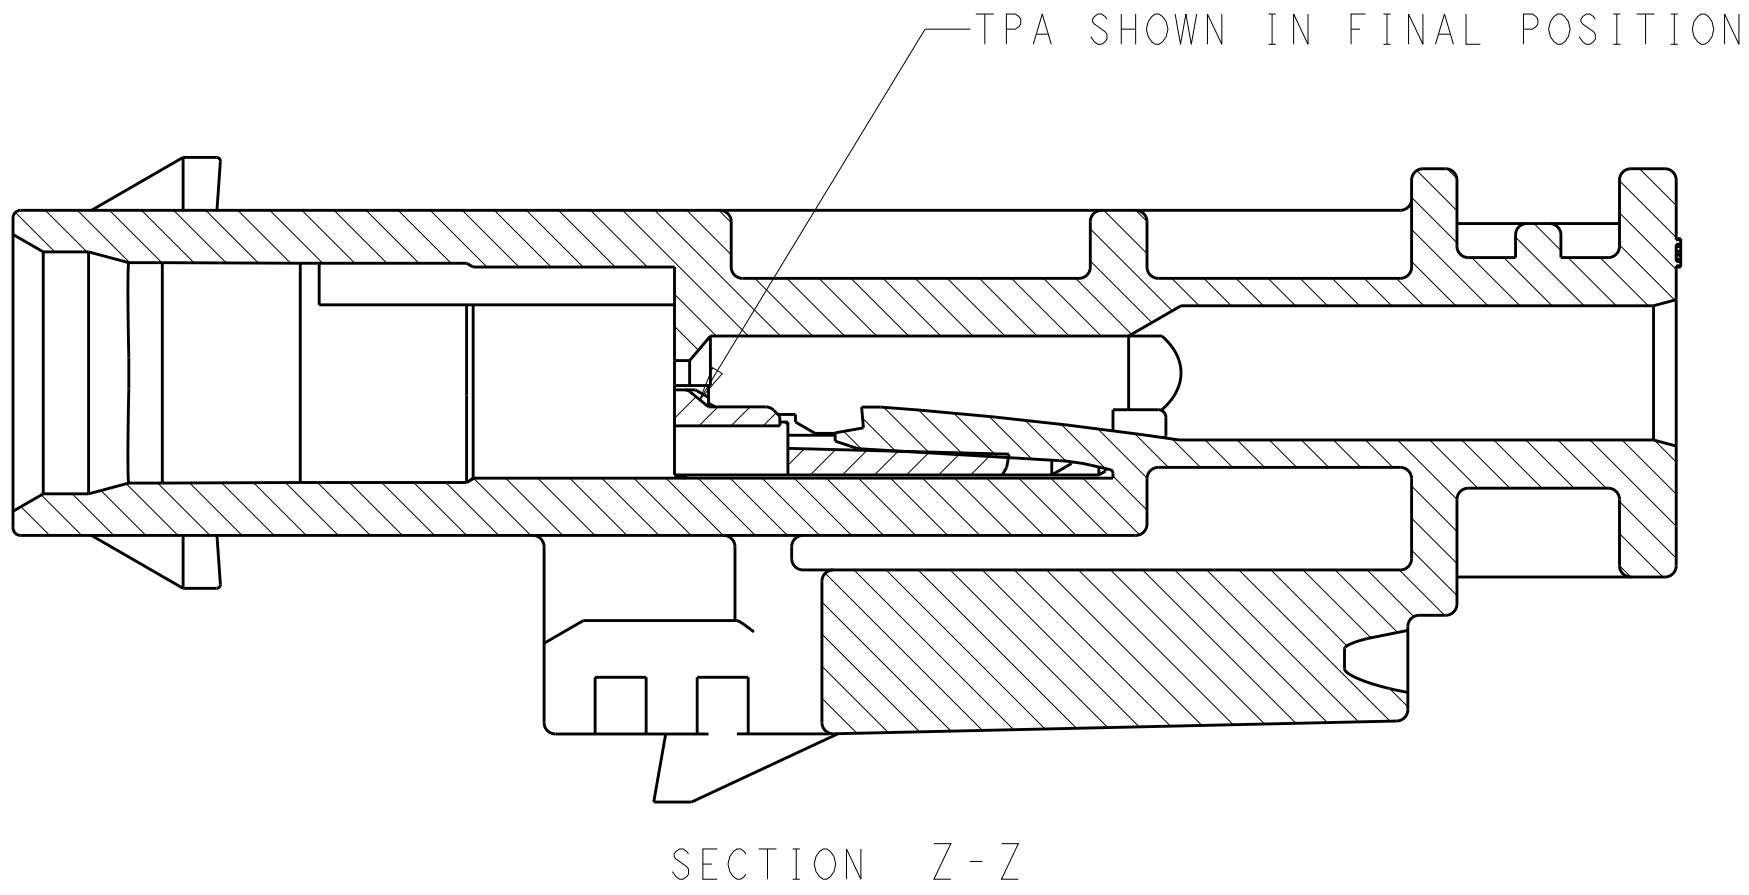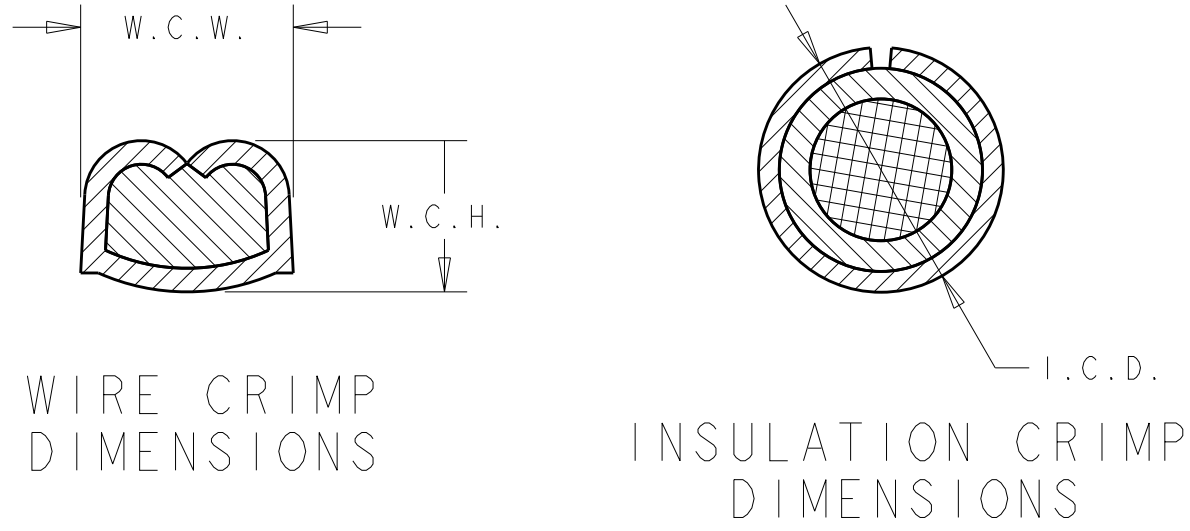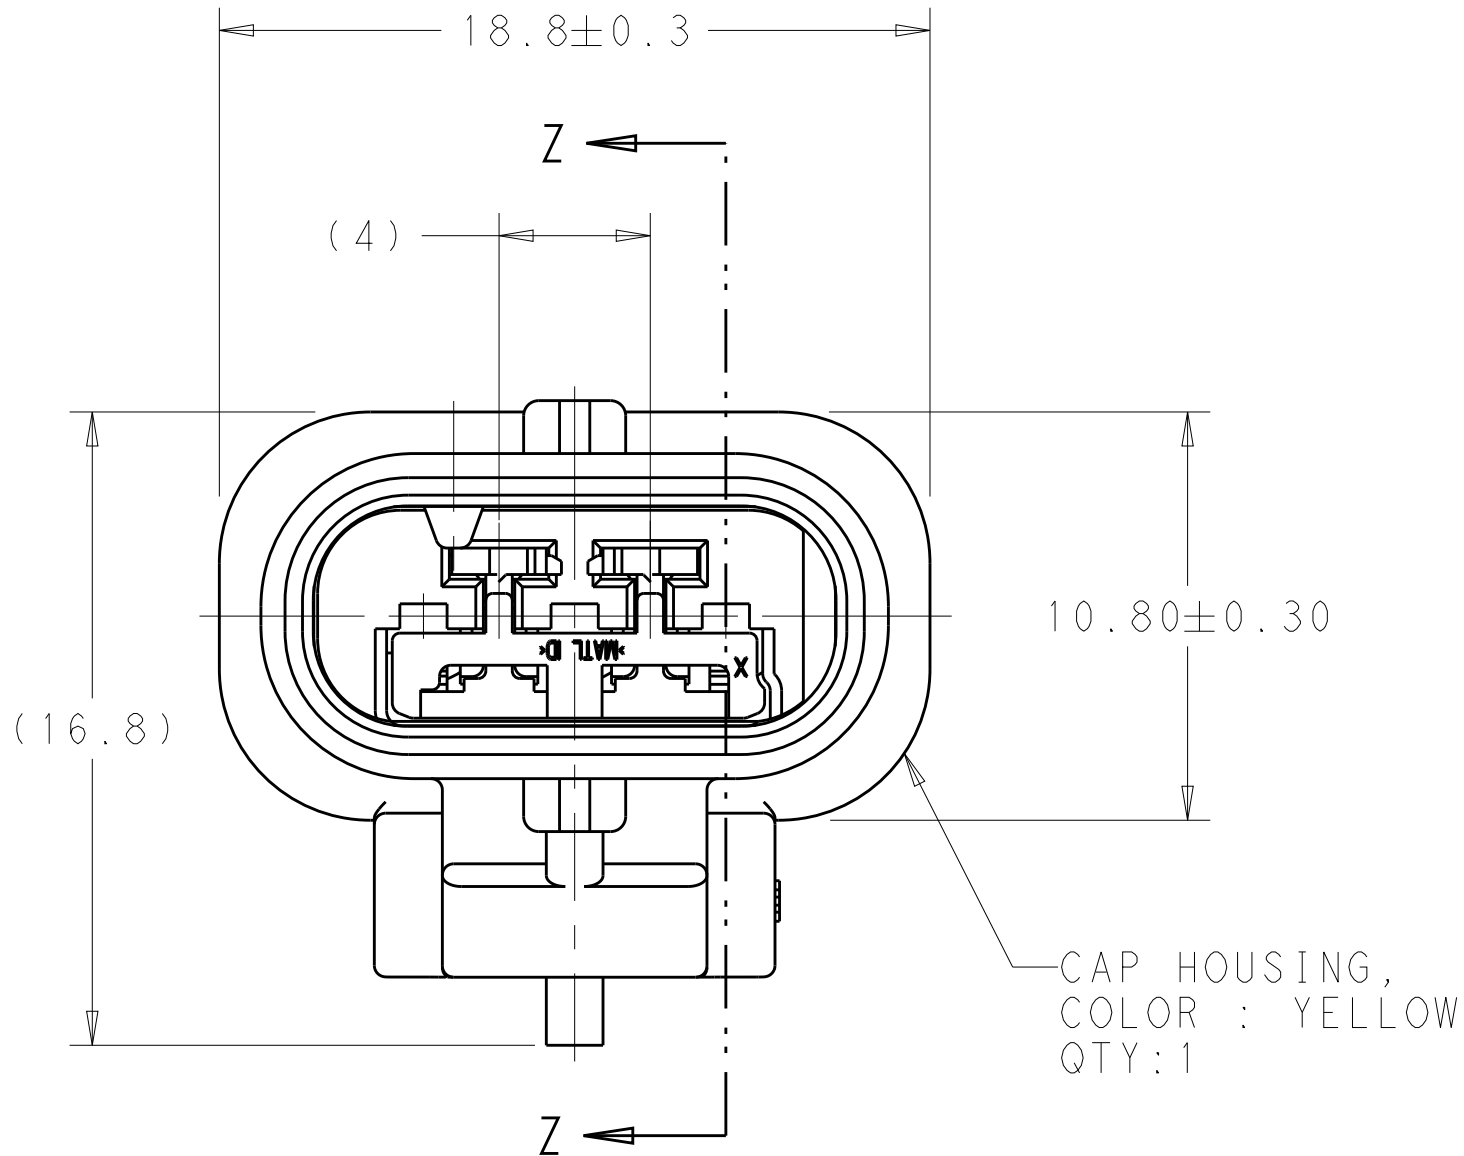

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO-17-002820	01MAR2017	VP	MDB
	B	REVISED PER ECO-17-003503	14MAR2017	DLD	JLT

D	2203807-4
C	2203807-3
B	2203807-2
A	2203807-1
KEY CODE	PART NUMBER

125°C	2141114	1.40-1.90mm	△5	△5	△5 △6	967067-1	THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm  TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ± MATERIAL - -	DWN M. HARISH 25MAY2011 CHK B. BUTCHER 25MAY2011 APVD B. BUTCHER 25MAY2011 PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	NAME CAP ASSEMBLY, 3 POSITION,SEALED, MCON SIR - SIZE CAGE CODE DRAWING NO A100779C=2203807 RESTRICTED TO -
	2141116	1.40-1.90mm				967067-1			
	2177610	1.90-2.40mm				964972-1			
MAX TEMP △4	MALE TERMINAL P/N	APPLICABLE WIRE FINISHED O.D.	W.C.H.	W.C.W.	I.C.D.	WIRE SEAL PART NUMBER △4			