THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-12-019535	07/NOV/12	ECC	GG

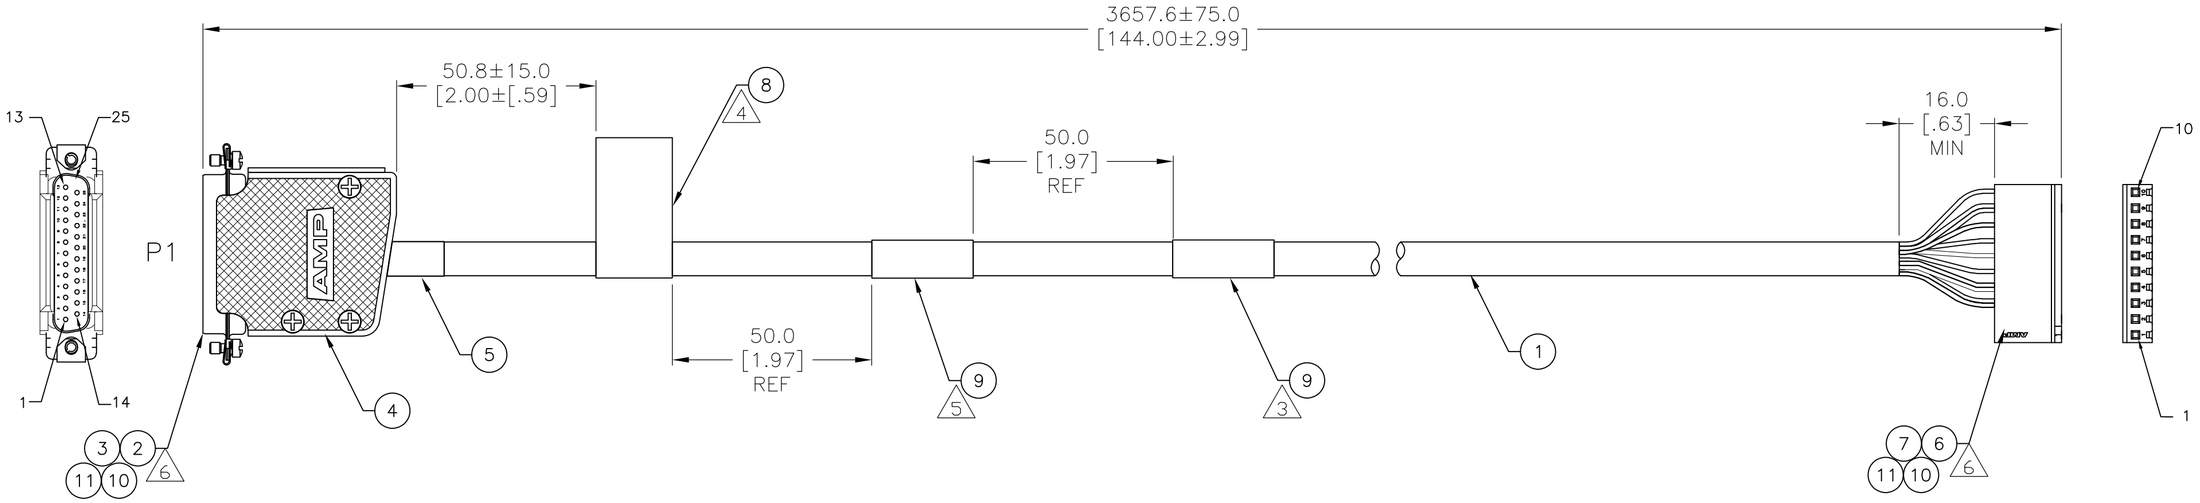

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD TEC-138-702.

2. 100% ELECTRICAL TEST FOR SHORTS, OPENS AND HI-POT AT 300VDC, 50 MOHMS FOR 100 MILLISECONDS.

3. LABEL PRINTED WITH 2-4mm HIGH LETTERING. LABEL TO READ AS FOLLOWS:

CUSTOMER P/N REV LEVEL
WWYY 912
COUNTRY OF ORIGIN ← IF OUTSIDE USA

4. LABEL AS FOLLOWS:

CUSTOMER P/N YYDDD - 213 MADE IN _ _ _	CUSTOMER P/N YYDDD - 213 MADE IN _ _ _

THE EFUP LOGO FOR CMM COMPLIANCE MUST BE AT LEAST 7mm X 7mm IN SIZE.

5. LABEL AS FOLLOWS:

30009314007
ANALOG PHONE PATCH

6. APPLY HEAT SHRINK TUBING TO INDIVIDUAL PAIRS AND AND DRAIN WIRES TO PREVENT SHORTS FROM SHIELD TO SHIELD.

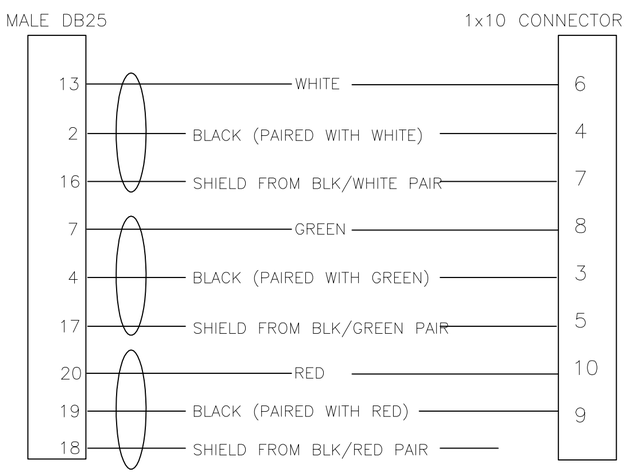

F	30009314007	2220737-1
CUSTOMER REV	CUSTOMER P/N	TE P/N

A/R	IN	TUBING, HEAT SHRINK, FLAME-RETARDANT, POLYOLEFIN TUBING	11
A/R	IN	TUBING, HEAT SHRINK, 3/16" x 48"	10
2	PC	LABEL, SBP100143WE5	9
1	PC	LABEL, WP-699191-5-9	8
8	PC	CONTACT, RECPT, SL156	7
1	PC	HOUSING, SL156 W/LOCKING RAMP, 10P	6
A/R	IN	AMPSULATION DWP31, 1/2"x48"	5
1	PC	CLAMSHELL, SIZE 3 W/RETAINER	4
9	PC	CONTACT, PIN, HD20	3
1	PC	AMPLIMITE, CRIMP SNAP, 25P, PLUG	2
A/R	FT	CABLE, 3 STP, 24 AWG [BELDEN 9730]	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN E.C. CLAYBAUGH 05/NOV/12
CHK G. GUTGOLD 05/NOV/12
APVD G. GUTGOLD 05/NOV/12
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME CABLE ASSY, BR-MODEL 30 DIGITAL PHONE PATCH [30009314007]

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2220737	—

CUSTOMER DRAWING | SCALE N.T.S. | SHEET 1 OF 1 | REV B

2220737

1471-9 (3/11)

07NOV2012 2:05pm us022590 C:\A-WORK\GG\REVISED\2220737_1-c.dwg