


1. CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION.
2. CONNECTOR IS SUPPLIED WITH CONTACTS (PER TABLE).
3. KEYING ASSEMBLED IN POSITION "01" AS SHOWN.
4. DUST COVER INSTALLED FOR SHIPPING. (NOT SHOWN)
5. THE FOLLOWING CONTACTS ARE INCLUDED AND NOT INSTALLED  
SZ 22 CRIMP PIN CONTACTS; TE P/N 208262-3, (QTY = 300)
6. THE FOLLOWING CONTACTS ARE INCLUDED INSTALLED  
MINI-EB CAVITY PLUGS; TE P/N 1588280-1, (QTY = 4)

REVISIONS				
P.	LTR.	DESCRIPTION	DATE	DWN. APVD.
	B	REV PER ECO 17-016085	2-16-18	CT RL

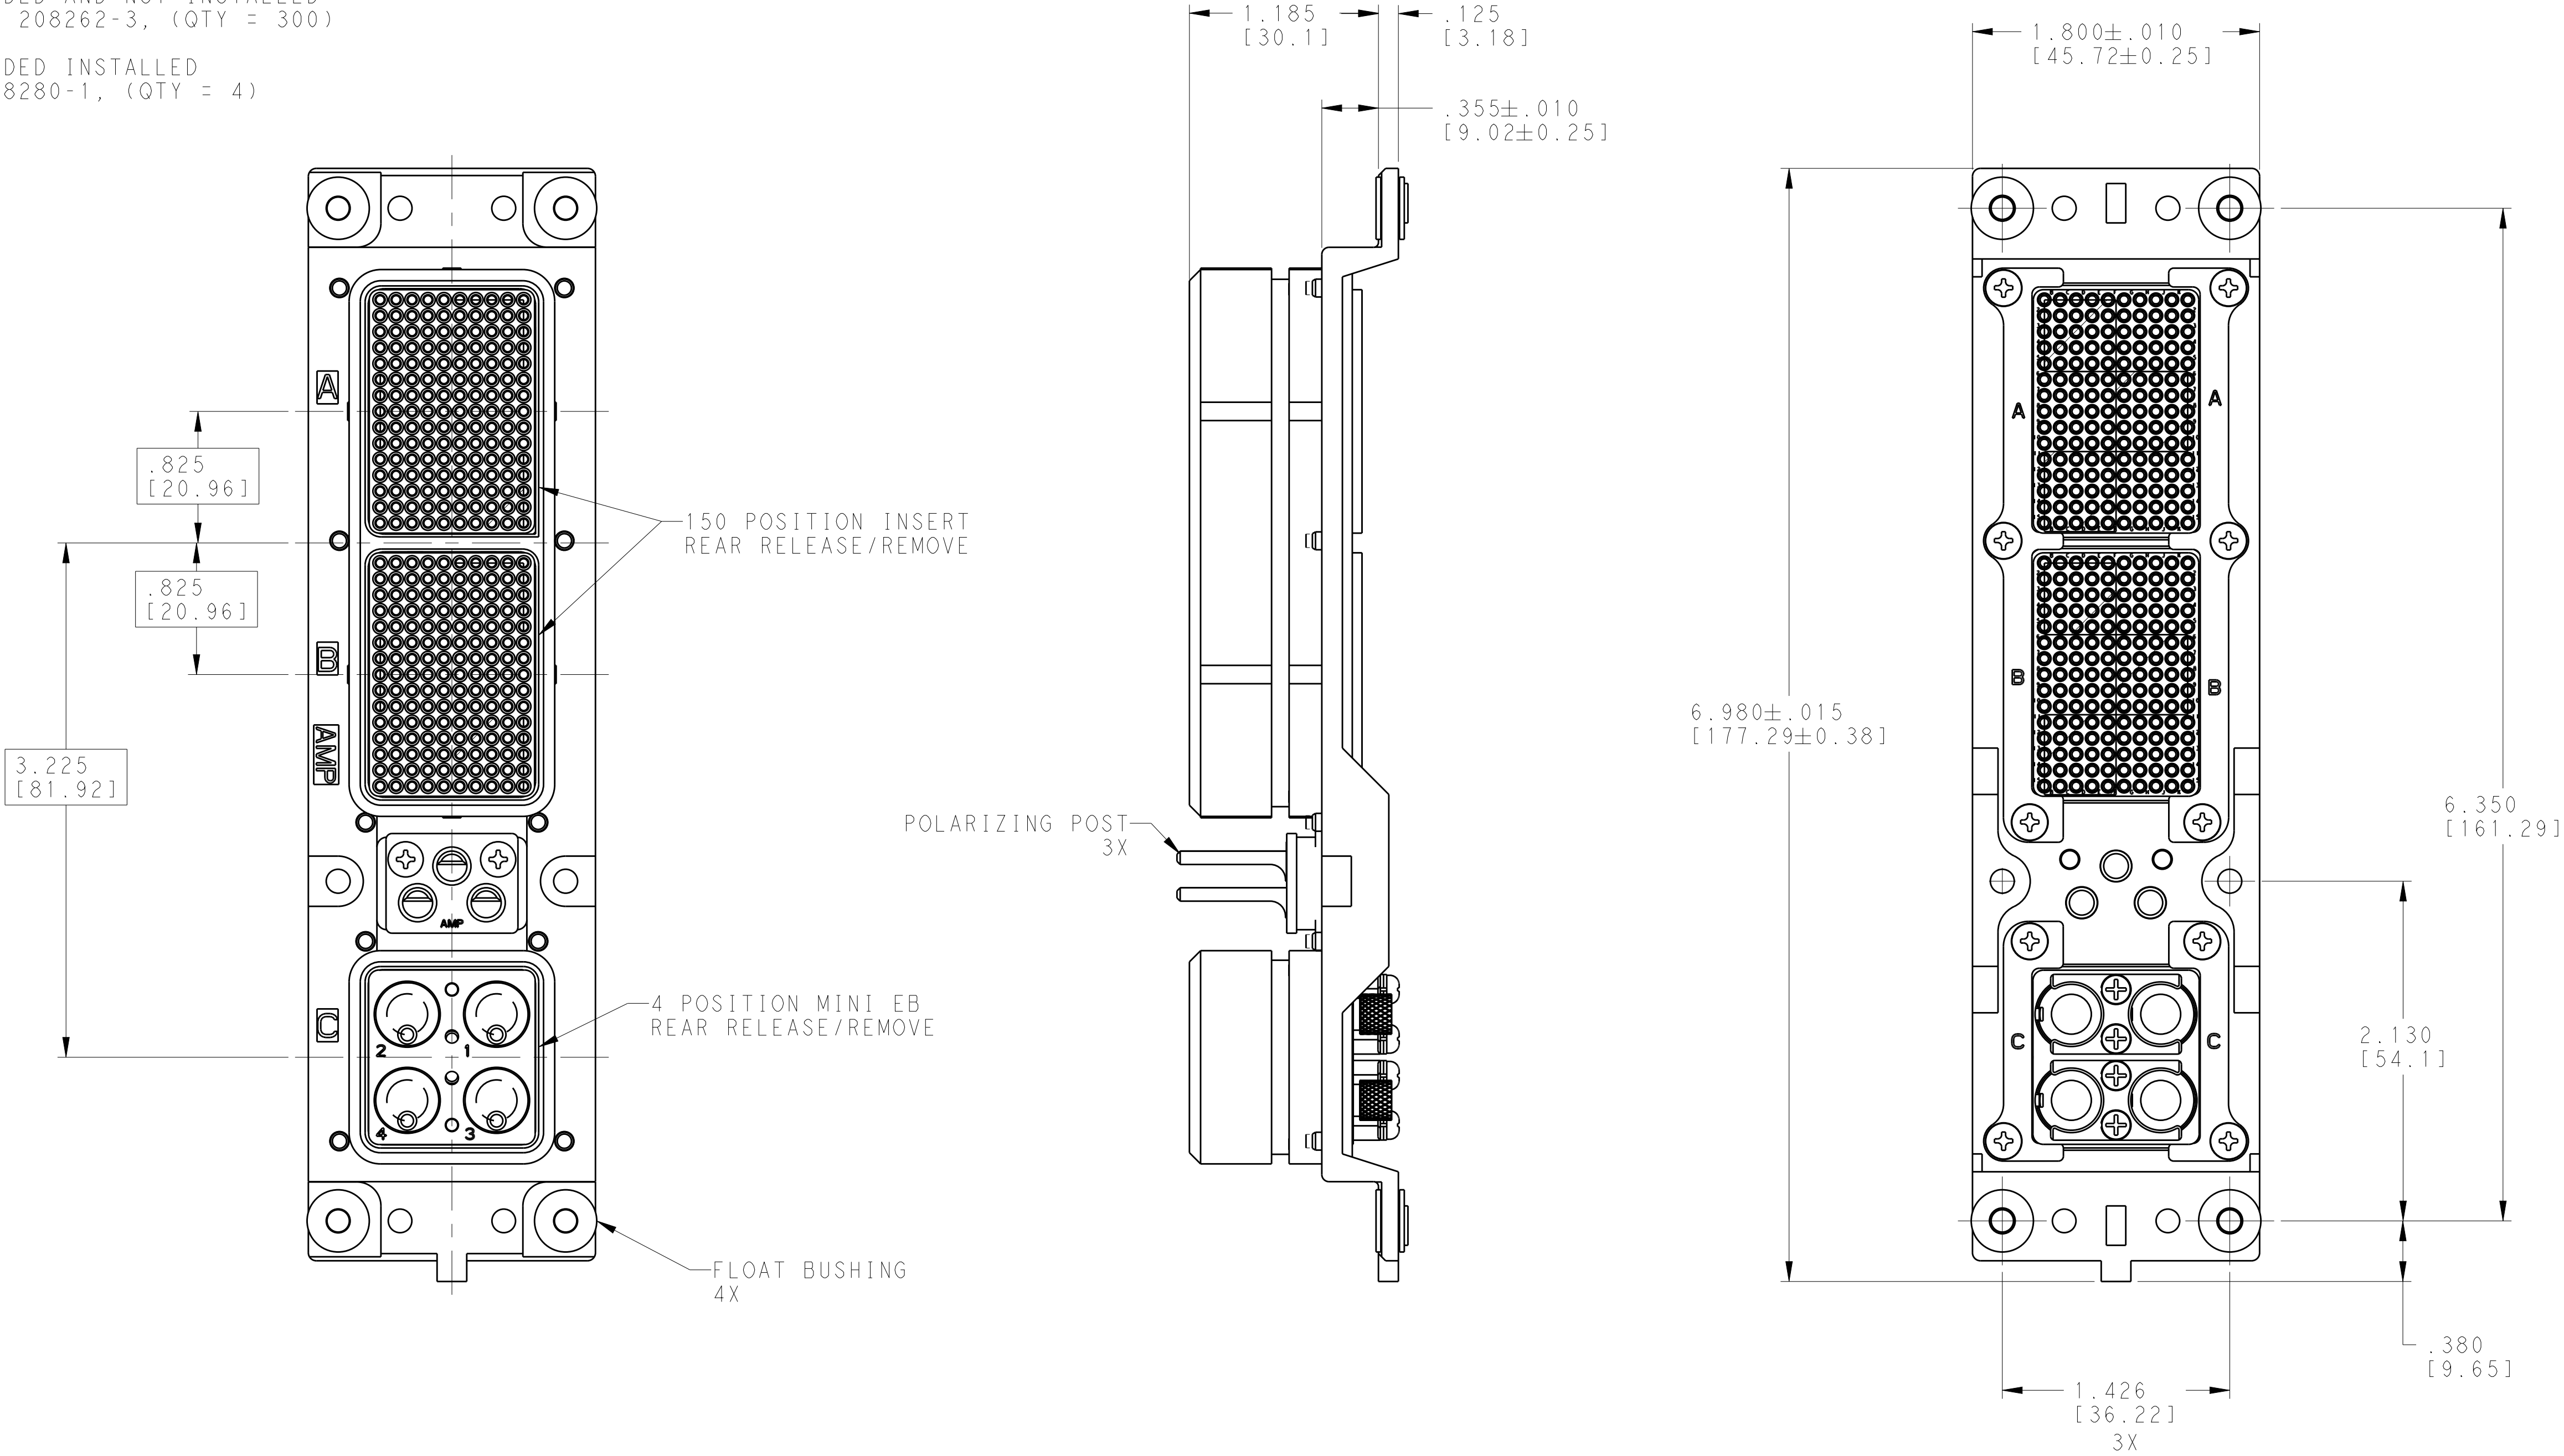

4 POSITION MINI EB	ALUMINUM ALLOY	ELECTROLESS NICKEL
150 POSITION INSERT REAR RELEASE/REMOVE QTY = 2	THERMOSET	--
POLARIZATION POST	ZINC ALLOY PER ASTM-B-86	ELECTROLESS NICKEL
KEYWAY RETAINER PLATE	ALUMINUM ALLOY	BLUE ANODIZED PER MIL-A-8625
INSERT RETENTION PLATE	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER PER AMS-C-26074
RECEPTACLE SHELL	ALUMINUM ALLOY PER ASTM-B-85	ELECTROLESS NICKEL PER PER AMS-C-26074
COMPONENT	MATERIAL	FINISH

"01"	2301600-1
KEYING POSITION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. C.C. THOMAS 29MAR2016	TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK. M. SPICER 2-29-16	NAME PLUG ASSEMBLY, SIZE 2, ARINC 600 (150/150/4MP) WITH FLOAT BUSHINGS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD. M. SPICER 2-29-16		
0 PLC ±.005 (0.13)		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO. RESTRICTED TO	
1 PLC ±.005 (0.13)		APPLICATION SPEC		
2 PLC ±.005 (0.13)		WEIGHT	A100779C=2301600	
3 PLC ±.005 (0.13)		CUSTOMER DRAWING		
4 PLC ±.005 (0.13)		SCALE 3:2	SHEET 1 OF 1	
ANGLES ±.005 (0.13)		REV B		
FINISH				