




D

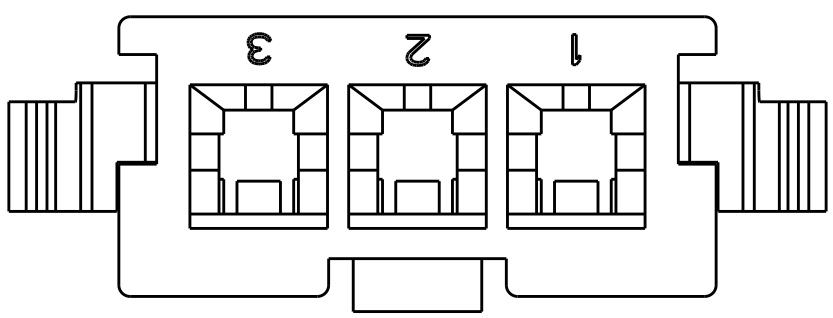

C

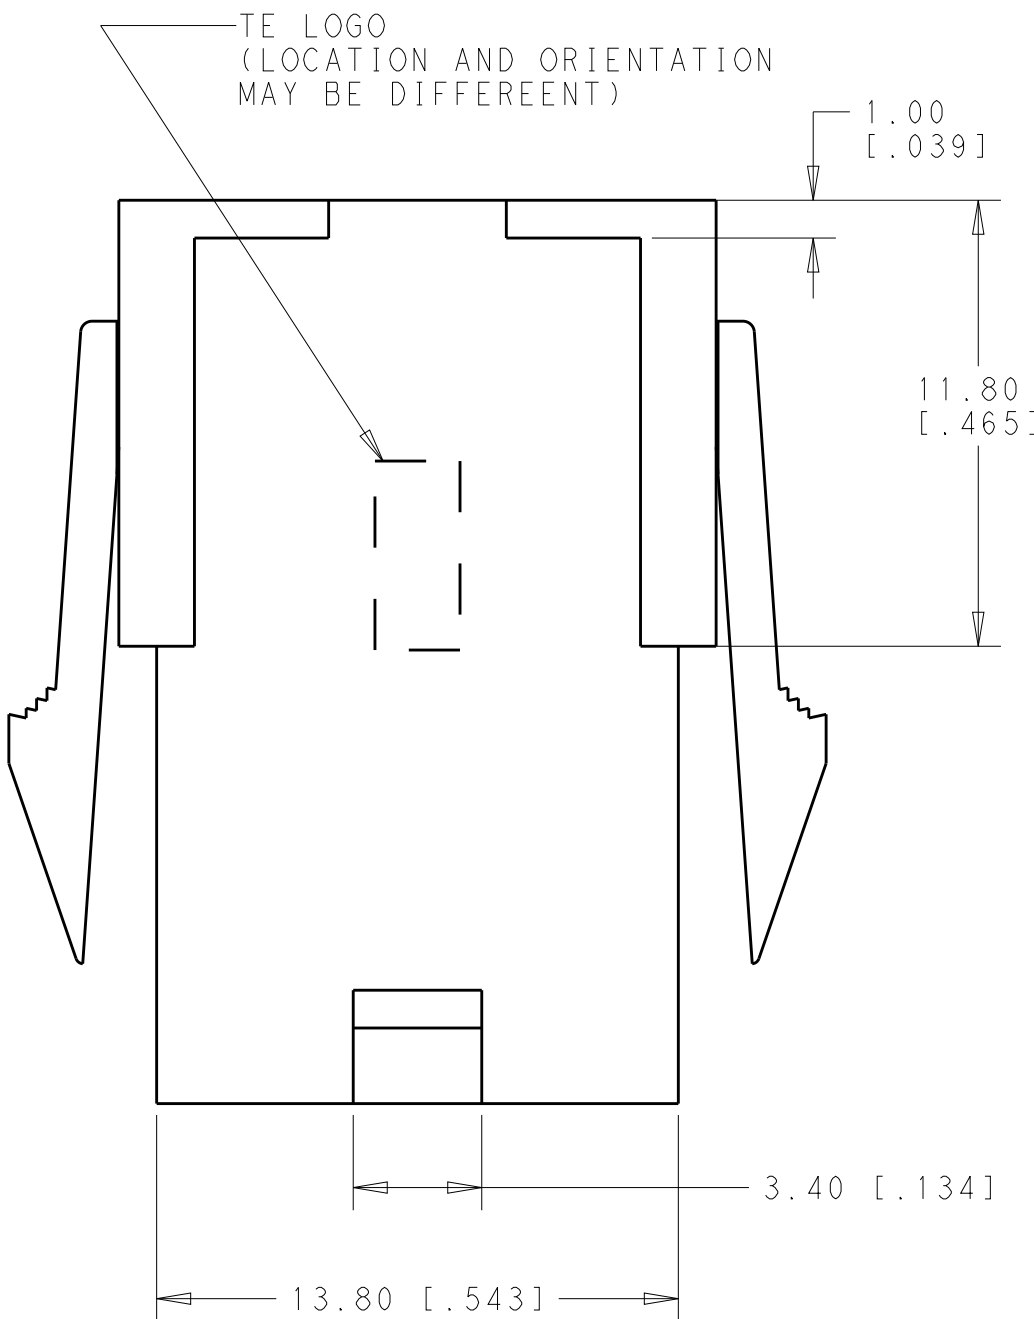


B

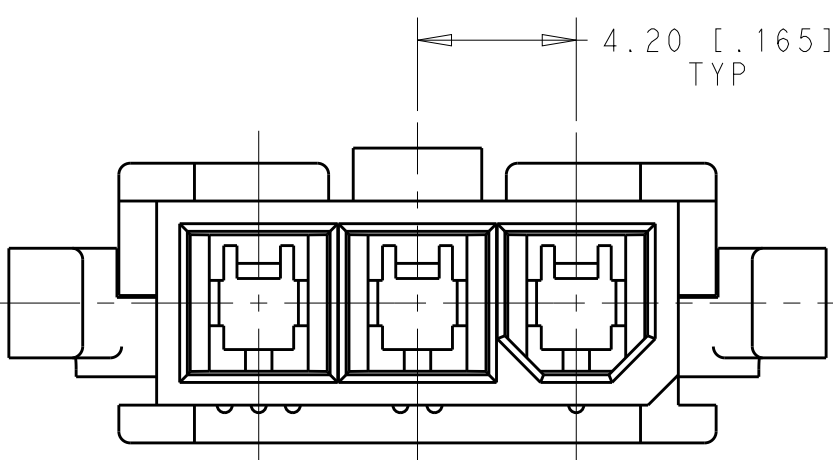

A

TPA ASSEMBLY OPERATION

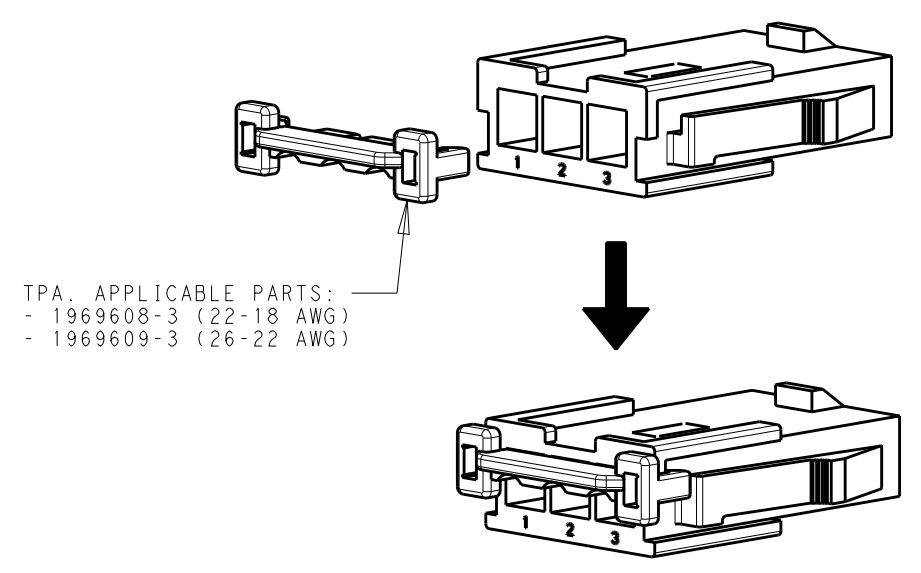

TPA, APPLICABLE PARTS:
- 1969608-3 (22-18 AWG)
- 1969609-3 (26-22 AWG)

SCALE 2:1

1. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
2. GLOW WIRE APPROVED, CONTACT TYCO ELECTRONICS ENGINEERING FOR SPECIFICATION.
3. MATING CONTACT:2238018-1/2238016-1.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECR-17-004343	05APR2017	JJ	DZ


D

C

B

A

3D VIEWS

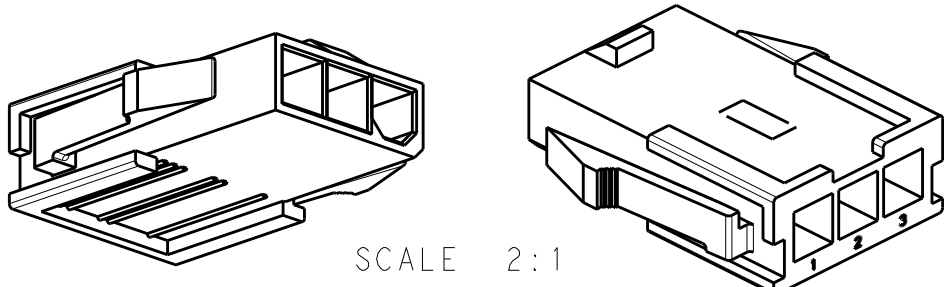

SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ± 2 PLC ±0.25[0.10] 3 PLC ± 4 PLC ± ANGLES ±0°30' FINISH -
MATERIAL POLYAMMIDE, UL94-V2	

DWN NAGALAKSHMI K	10AUG2016
CHK CHIARELLI DAVIDE	10AUG2016
APVD CHIARELLI DAVIDE	10AUG2016
PRODUCT SPEC	108-2112
APPLICATION SPEC	114-13172
WEIGHT	-
CUSTOMER DRAWING	



TE Connectivity

NAME PLUG, 3 POS, VAL-U-LOK(TM) TPA VERSION TPA VERSION			
SIZE A2	CAGE CODE 00779	DRAWING NO C-2307184	RESTRICTED TO -
SCALE 5:1	SHEET 1	OF 1	REV A

2307184-3
PART NO.