


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	FIRST RELEASED	06JUL2018	WH	DZ



- 1

POLYAMIDE,UL94-V2, COLOR: NATURL
2. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
3. COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT).
4. MATING CONTACT:2238018-1/2238016-1.
MATING RECEPTACLE:1586105-3

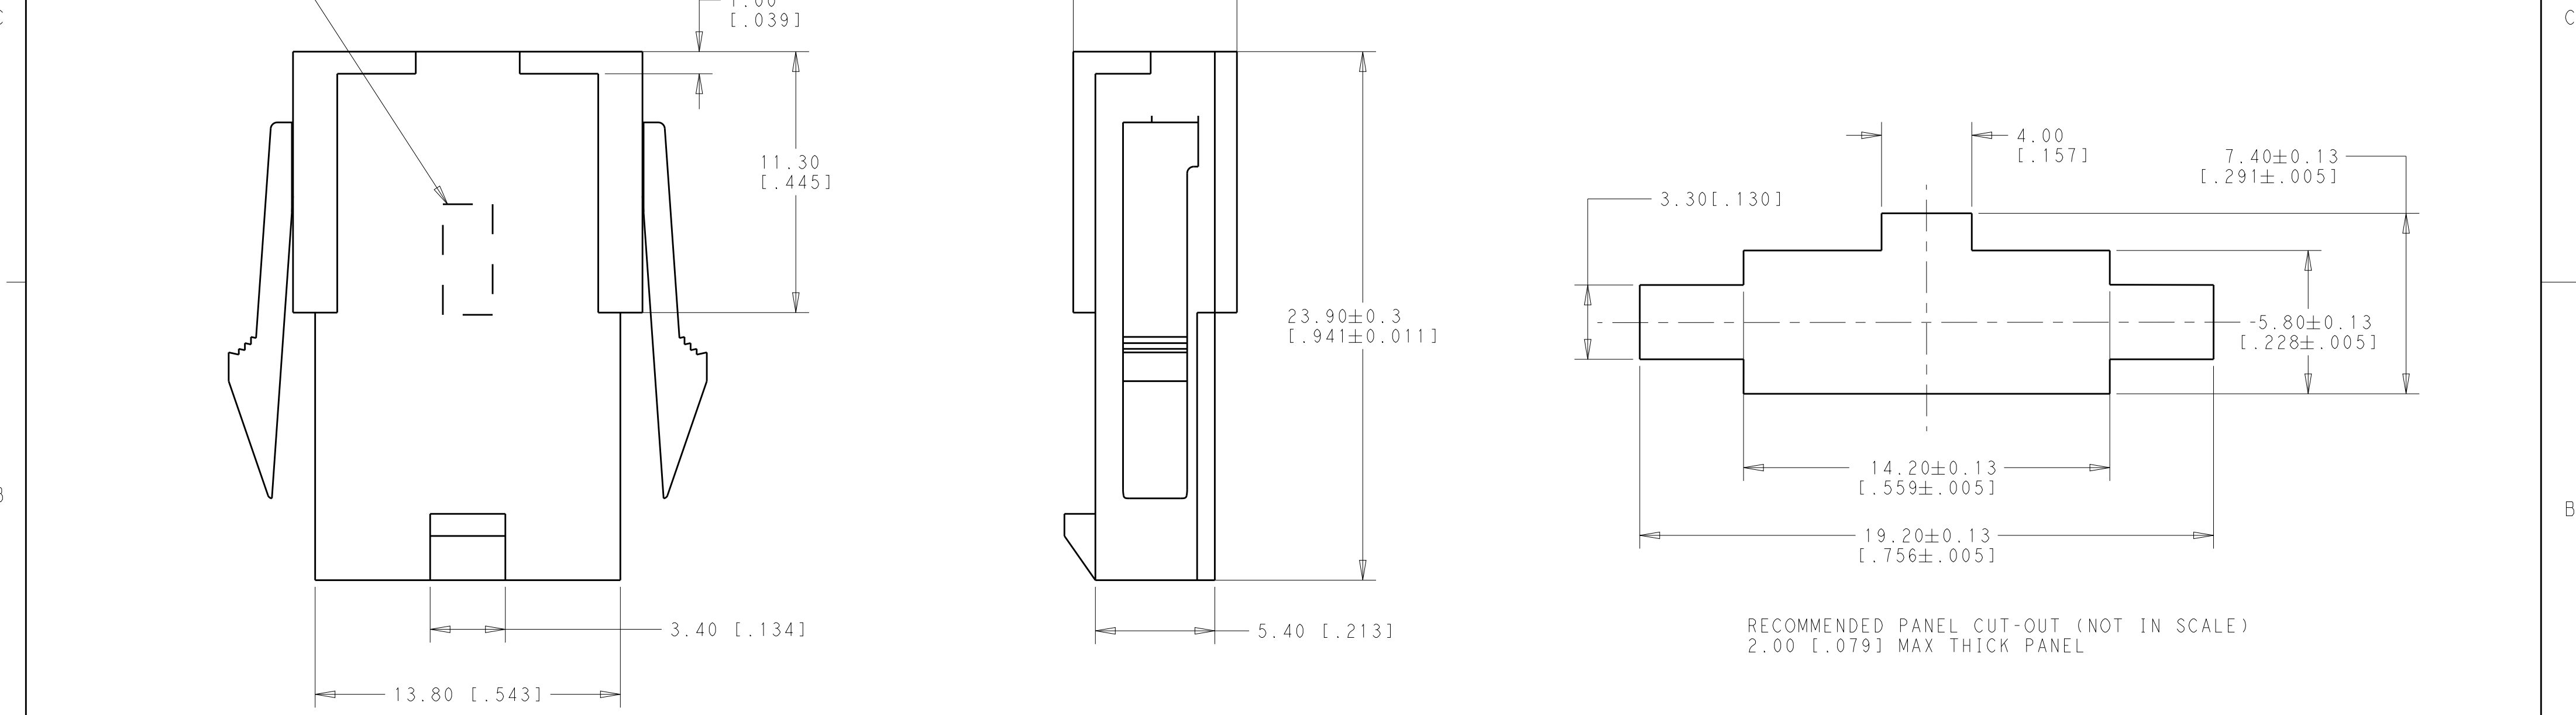

RECOMMENDED PANEL CUT-OUT (NOT IN SCALE)
2.00 [.079] MAX THICK PANEL



2321954-3

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 07FEB2018 WARREN HUO	TE Connectivity			
		CHK 08FEB2018 WARREN HUO				
DIMENSIONS: mm[INCHES]		APVD 08FEB2018 DANIEL ZHANG	NAME PLUG, 3 POS, VAL-U-LOK(TM) TPA VERSION TPA VERSION			
		PRODUCT SPEC	SIZE			
		108-2112	CAGE CODE			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.25[0.010] 3 PLC ±- 4 PLC ±- ANGLES ±0° 30' FINISH		APPLICATION SPEC	DRAWING NO			
		114-13172	RESTRICTED TO			
MATERIAL		WEIGHT	A200779			
		CUSTOMER DRAWING	SCALE N/A			
			SHEET 1 OF 1			
			REV A			