© 2022 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	I	PRELIMINARY	08SEP2017	JMS	CM
	A	REV PER ECO-17-016943	27NOV2017	JMS	CM
	A1	REV PER ECN-22-162096	15JUL2022	SMR	CM

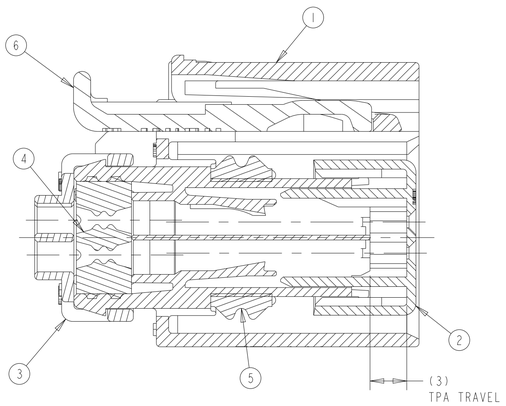

SECTION A-A
SHOWN WITH TPA
AND CPA IN
PRESET POSITIONS
(DELIVERY CONDITION)

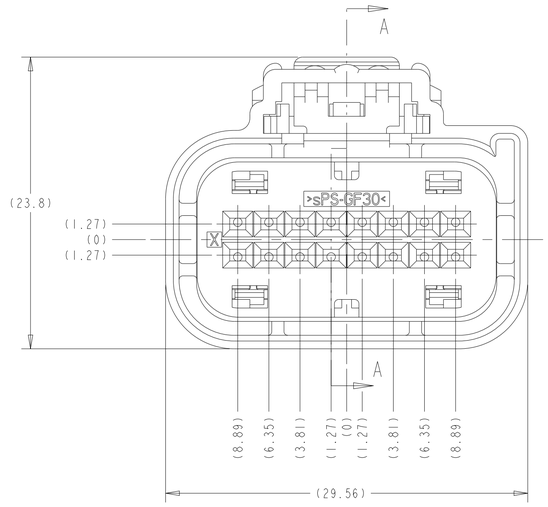

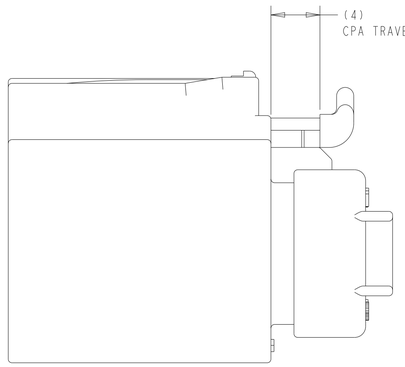

PIN OUT CHART																
																2324011-1
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	ASSEMBLY PART NUMBER
TERMINAL HOLE POSITION																
CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS																
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS																

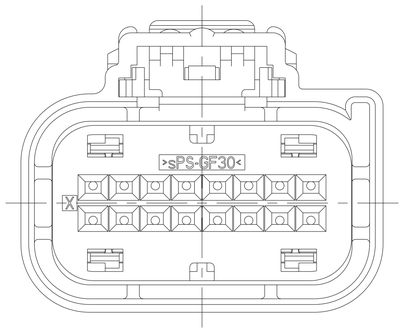

KEYING OPTION "A"

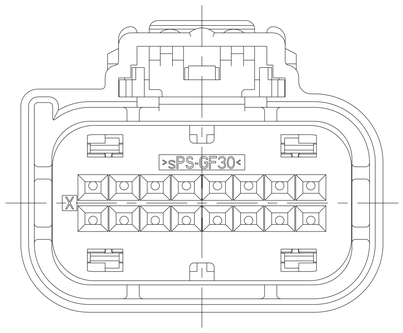

KEYING OPTION "B"

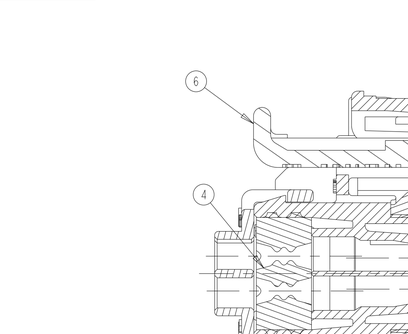

KEYING OPTION "C"

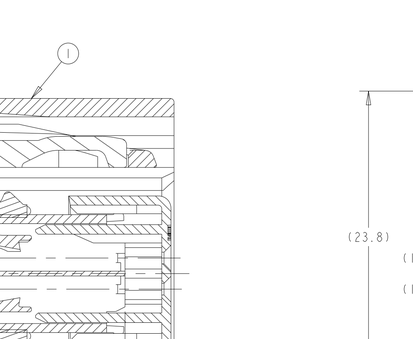

KEYING OPTION "D"

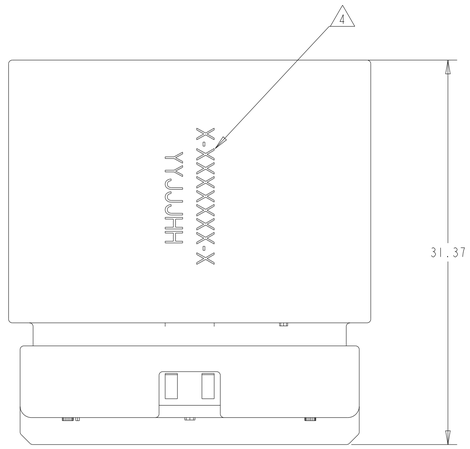

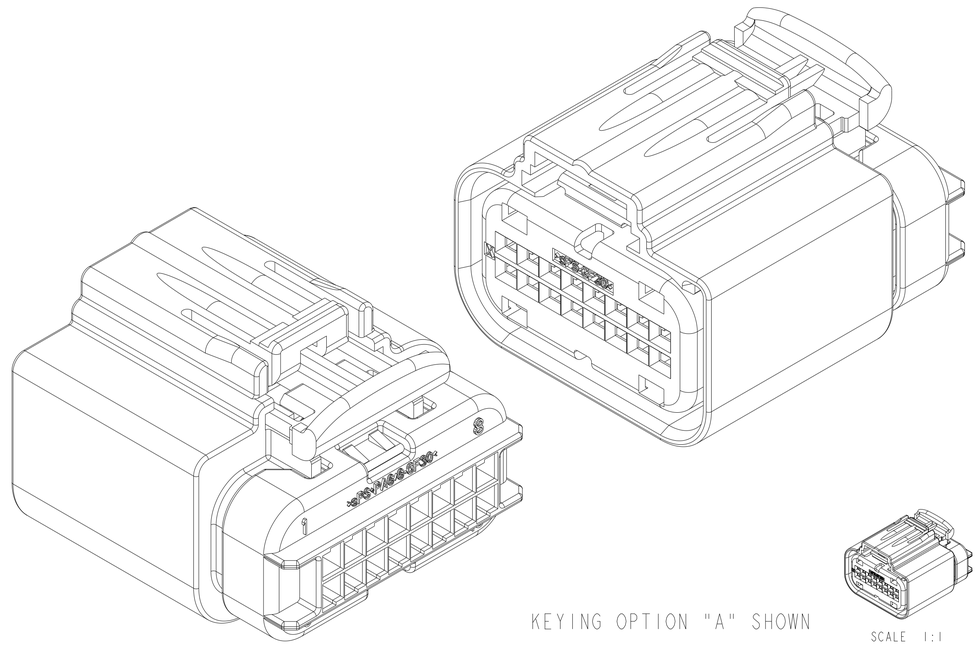

KEYING OPTION "A" SHOWN

SCALE 1:1

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
   FOR TIN AND SILVER APPLICATIONS: 1393367 AND 1393366.
   FOR GOLD APPLICATIONS: 1393365 AND 1393364.
   FOR TERMINATION AND REELING OPTIONS
   SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.

2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
   (22-18 AWG, 0.35-0.75 mm^2)

3. CPA AND TPA ARE SHIPPED IN PRESET POSITION. SOME TPA'S MAY BECOME FULLY SEATED DURING SHIPPING. REFERENCE TE INSTRUCTION SHEETS 408-8598 AND 408-10128 TO REPOSITION TPA TO IT'S PRESET POSITION.

4. TE ASSEMBLY PART NUMBER (X-XXXXXXX-X) AND TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR) ARE PRINTED IN THIS LOCATION.

5. APPLICABLE HEADER INTERFACE DRAWING 1488345.

6. ASSEMBLIES ARE BULK PACKAGED.

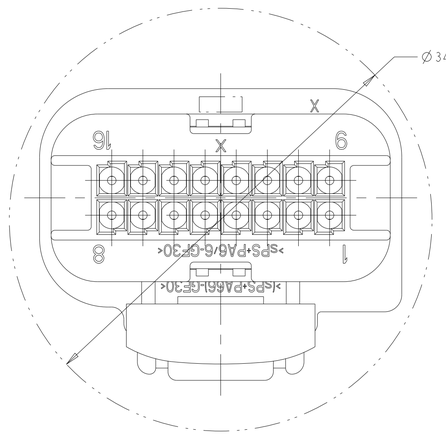

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

			2324011-1	<--- ASSEMBLY PART NUMBERS			
			1	6	CPA	PBT-GF15	GRAY
			1	5	PERIMETER SEAL	SILICONE	GREEN
			1	4	GROMMET	SILICONE	BROWN
			1	3	COVER	sPS-GF30	BLACK
			1	2	TPA	sPS-GF30	NATURAL/RED
				1	PLUG WITH KEYING OPTION "D"	(sPS+PA66)-GF30	BLACK
				1	PLUG WITH KEYING OPTION "C"	(sPS+PA66)-GF30	BLACK
				1	PLUG WITH KEYING OPTION "B"	(sPS+PA66)-GF30	BLACK
			1	1	PLUG WITH KEYING OPTION "A"	(sPS+PA66)-GF30	BLACK
QUANTITY			ITEM		DESCRIPTION	MATERIAL	COLOR/FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±
4 PLC ±
ANGLES ±3°

MATERIAL -

FINISH -

DWN J SHIRK 08SEPT2017
CHK -
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME 2X8 SEALED, FEMALE PLUG ASSEMBLY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2324011	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A1