THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		.	A	FIRST VERSION	08DEC2015	G.F	S.M

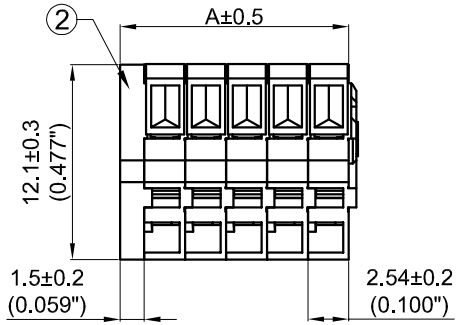

NOTES :

1. MATERIALS AND FINISH:
   - HOUSING: PA66
   - CONTACTS: BRASS, FINISH: TIN OVER NICKEL UNDERPLATE
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
3. WIRE TYPES AND SIZES ACCEPTED
   WIRE RANGE: 20AWG~28AWG.
   STRIP LENGTH: 5.5mm~6.5mm
4. PACKAGED IN TRAY.
5. CURRENT RATING: 4Amp AC150V.
6. OPERATION TEMPERATURE: −40°C TO +105°C
7. THIS PART No. IS THE SAME STRUCTURE AS THE SERIES: 2834087
   THE DATASHEET AND MORE DETAILS PLEASE FOLLOW THE SERIES: 2834087

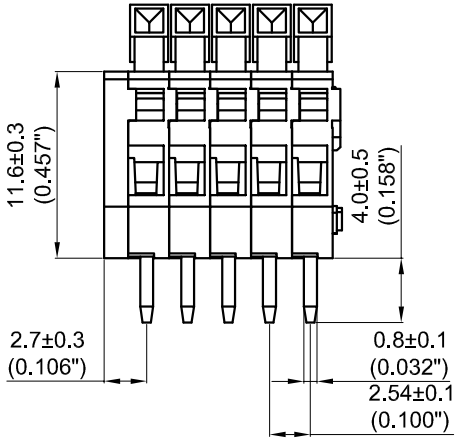

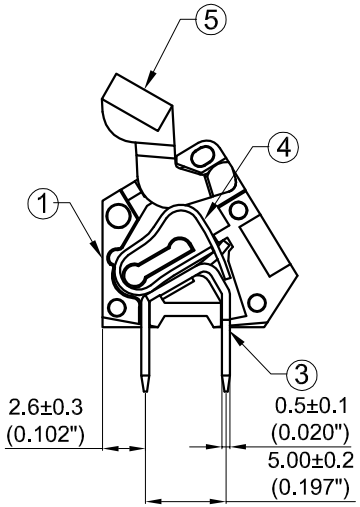



⑤	LEVER
④	WIRE PROTECTOR
③	CONTACT
②	COVER
①	HOUSING

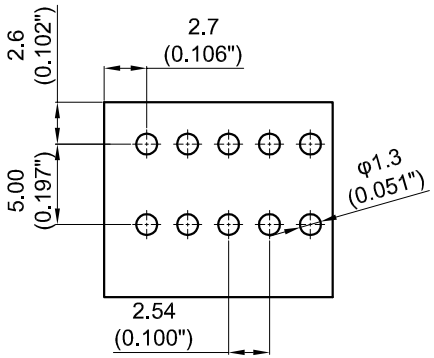

PCB Layout

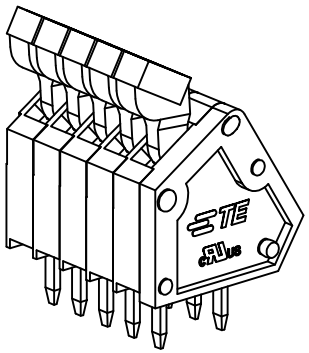

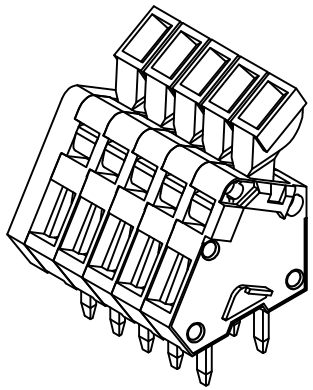

COLOR	DIM A	NO. OF POSITIONS	PART NO
GRAY	21.82	8 POSN	2834087−7
	19.28	7 POSN	2834087−6
	16.74	6 POSN	2834087−5
	14.20	5 POSN	2834087−4
	11.66	4 POSN	2834087−3
	9.12	3 POSN	2834087−2
	6.58	2 POSN	2834087−1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 PLC ±0.20
1 PLC ±0.13
2 PLC ±0.1
3 PLC ±0.08
4 PLC ±0.05
ANGLES ±2°

MATERIAL ①

FINISH ①

DWN	GEORGE FU 08DEC2015
CHK	SHI MING 08DEC2015
APVD	XU XIANG 08DEC2015
PRODUCT SPEC	108-137146
APPLICATION SPEC	114-137146
WEIGHT	-

TE Connectivity

NAME: 2.54 45°Entry Screwless Connector

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2834087	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A