



Die deutsche Version dieser Zeichnung dient nur zur Erleichterung der
Handhabung der Zeichnungen von den englischen Originalen aus.
The german version of this drawing has been offered for convenience only
and may deviate from the english original.
In case of any deviation the English version shall prevail.


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind
verboten, soweit ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz.
Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustererregung vorbehalten.
The reproduction, distribution and utilization of this document as well as the communication
of its contents to others without express authorization is prohibited. Offenders will be held liable for the
payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

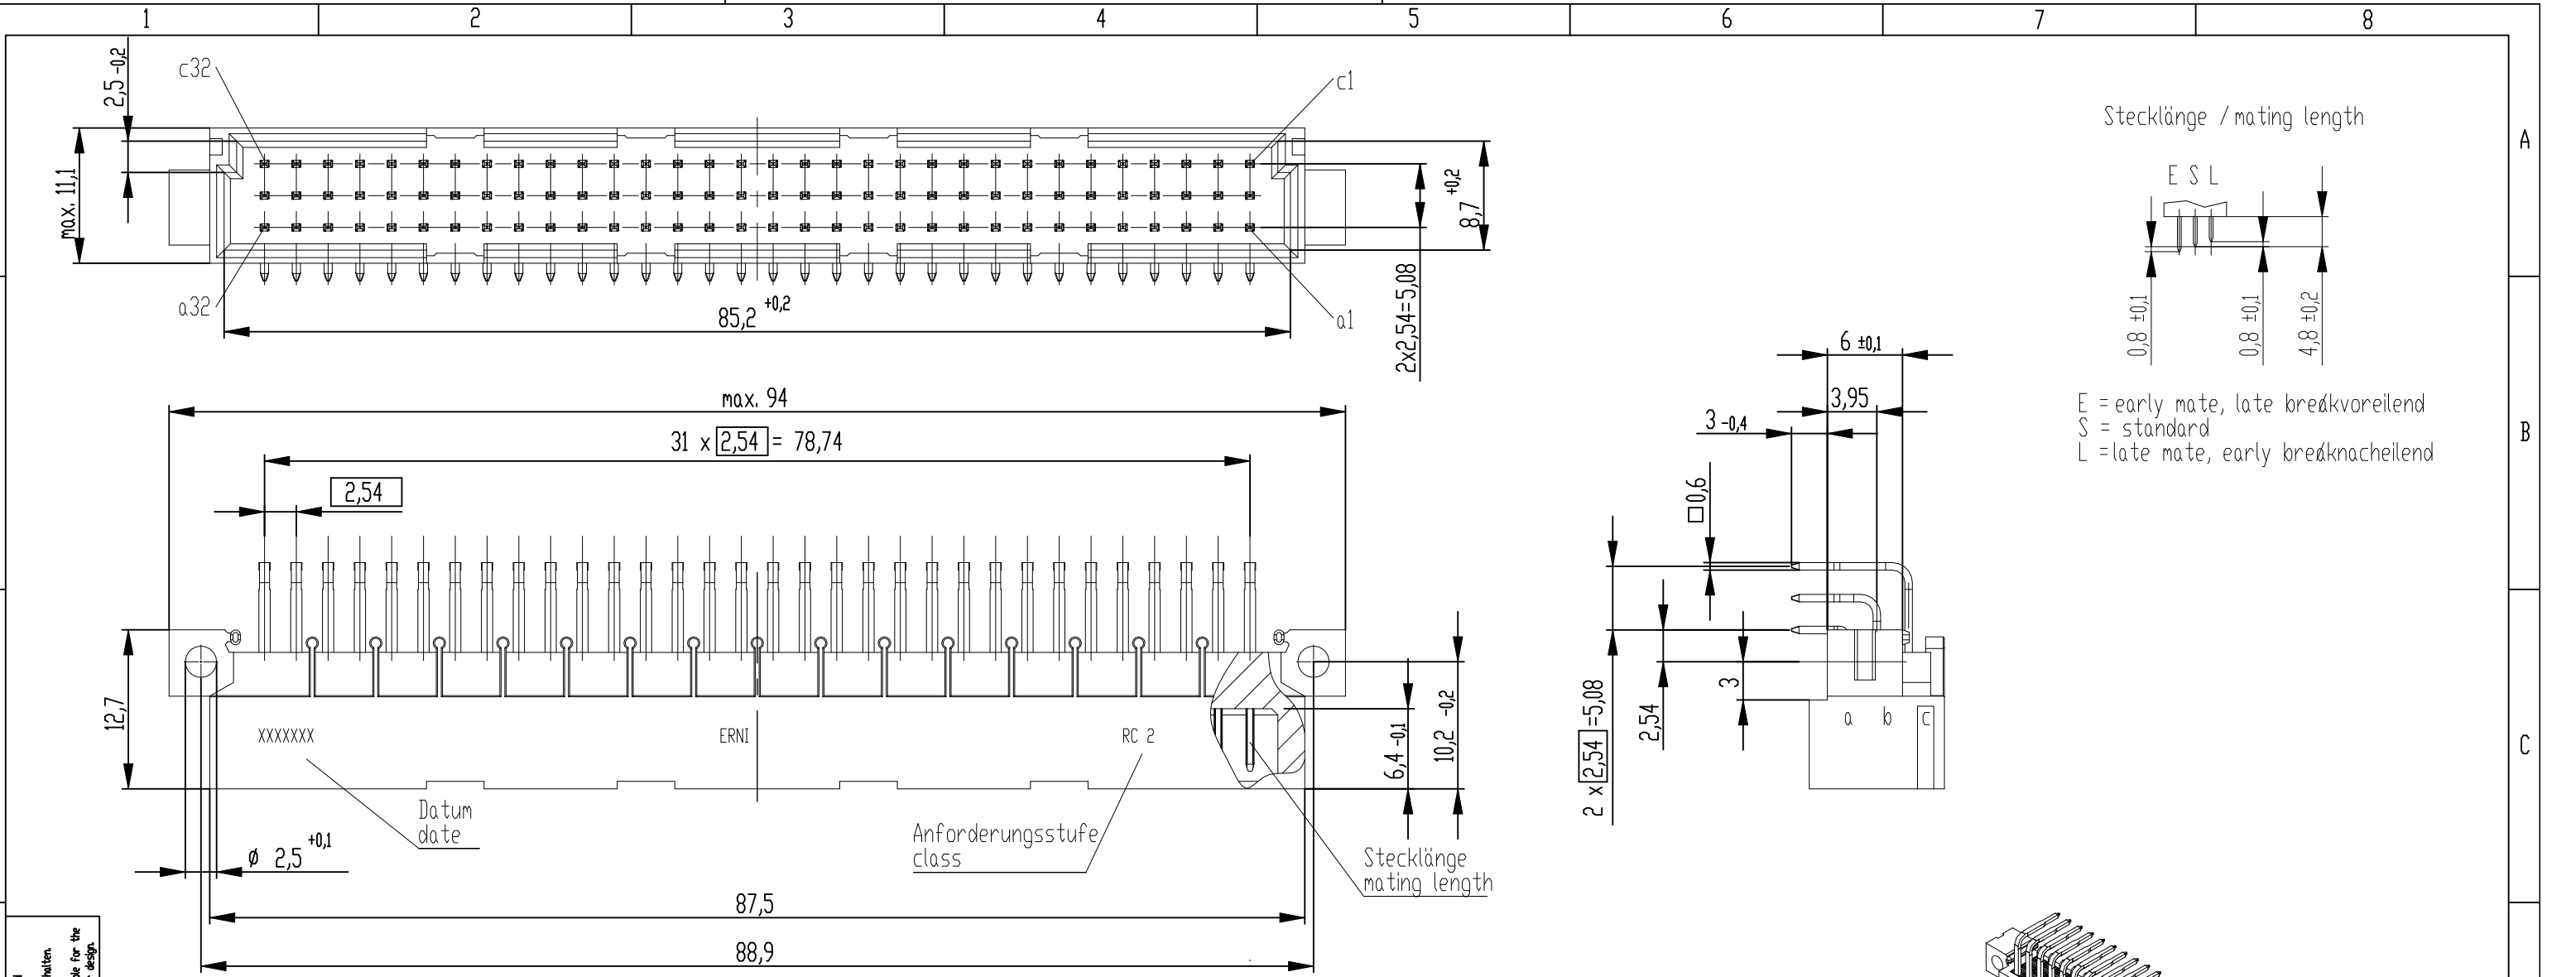


Bestückungsplan Contact layout

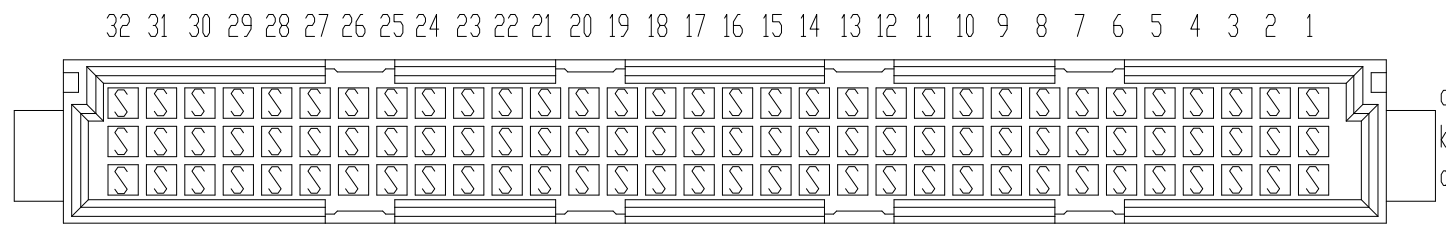


Leiterplatten-Lochbild / PCB drillhole pattern

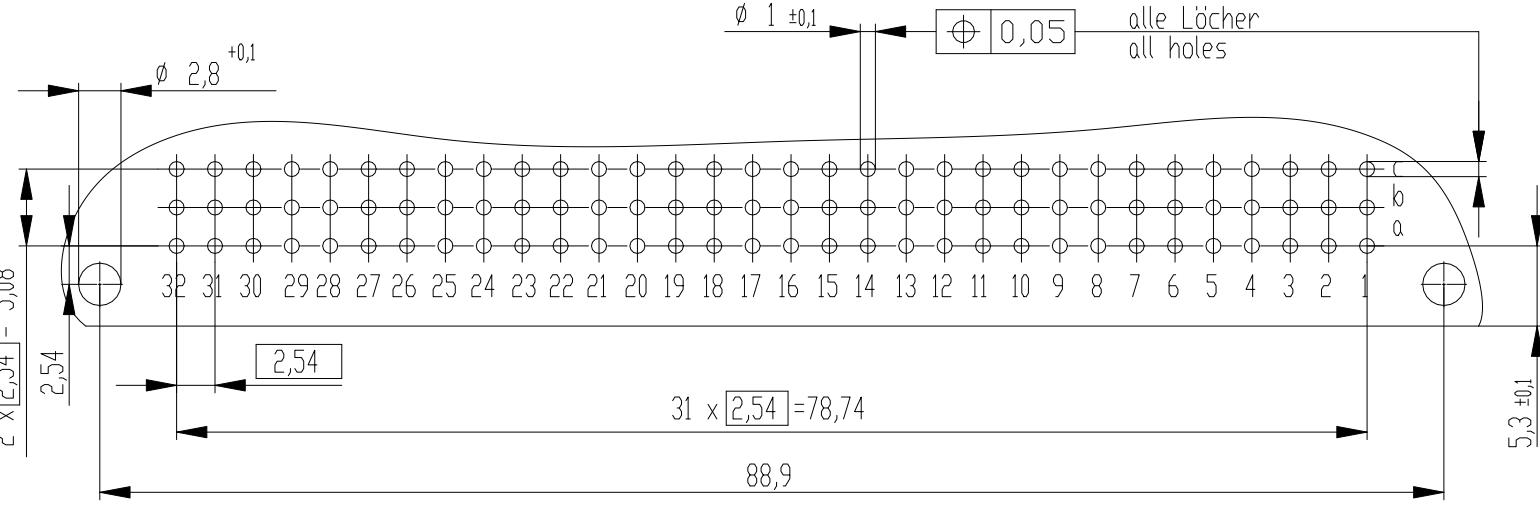

Stecklänge / mating length




E = early mate, late breakvoreilend
S = standard
L = late mate, early breaknacheilend

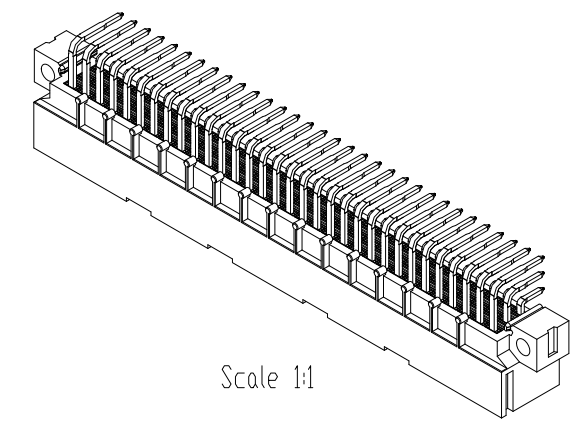

Lötanschluss 0,6x0,6mm
solder terminal 0,6x0,6mm

Anforderungsstufe 2 = 400 Steckzyklen
performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Dimension no.				Tolerances Dim. for Information ISO 8015		 All Dimensions in mm	Scale 2:1		
Customer drawing: THIS DRAWING IS A CONTROLLED DOCUMENT.				Subject to modification without prior notice. Drawing will not be updated.			Material		
						 TE Connectivity	ERNI-DIN 41612 / IEC-60603-2 Male Connector C96 Solder Type 4		
c		30.07.2021		©=364915-E			I		
Index		Date		Class			STVC	A3	