SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA 22.2, # 0,0.4,8

VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 3 AMP/40°C, 120/250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

0.16 mA@ 120V 60Hz EACH LINE TO GROUND:

0.28 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_0 - \sqrt{100 - T_0}$ 100 - T_a $I_0 = I_r -$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDS

| CATALOG # 3ERK1 | | | | | | | | |
|-----------------|---------|---------|--|--|--|--|--|--|
| EC # | APPRVD. | DATE | | | | | | |
| 08-028933 | РΠ | 19N0708 | | | | | | |

CUSTOMER DRAWING

TEST SPECIFICATIONS:

INDUCTANCE: 7.0 mH NDMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0044 μF ±20% LINE TO LINE: 0.741 μF±20% DISCHARGE RESISTOR: 470K △

L/G AND L/L I.R.

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

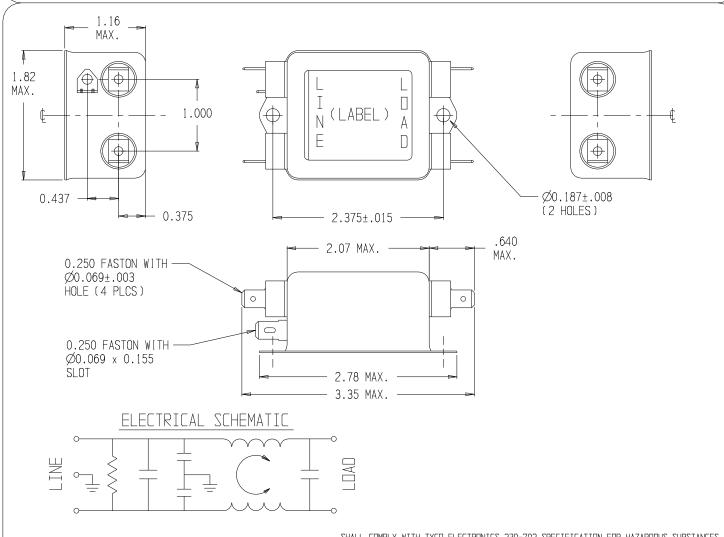

SHALL COMPLY WITH TYCO ELECTRONICS 230-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES

| | 50a-50a(MINIMUM) INSERTION LOSS | | | | | | | | ION | | ZZ | THIRD ANGLE | |
|---|---------------------------------|-----|------|------|-----|-----|-----|-----|-----|----|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| | FREQUENCY MHz | .05 | . 10 | . 15 | .50 | 1.0 | 2.0 | 5.0 | 10 | 20 | 30 | PROJECTION UNLESS OTHERWISE SPECIFIED, TOLERANCE TO BE ± .025 TOLERANCE TO BE ± .025 TOLERANCE TO BE ± .025 | |
| | COMMON dB | 21 | 27 | 30 | 43 | 49 | 50 | 50 | 48 | 50 | 49 | MATERIAL & FINISH: AS SUPPLIED PUBLIC LINE FILLER THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYPH EFFORMICS PART NO. 1-1609036-7 | |
| ١ | DIFF. dB | 9 | 20 | 35 | 67 | 78 | 78 | 72 | 66 | 61 | 60 | TYCE ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES SCALE: NTS DATE: O1FEBO8 O | |