
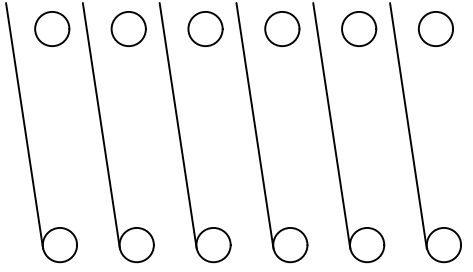
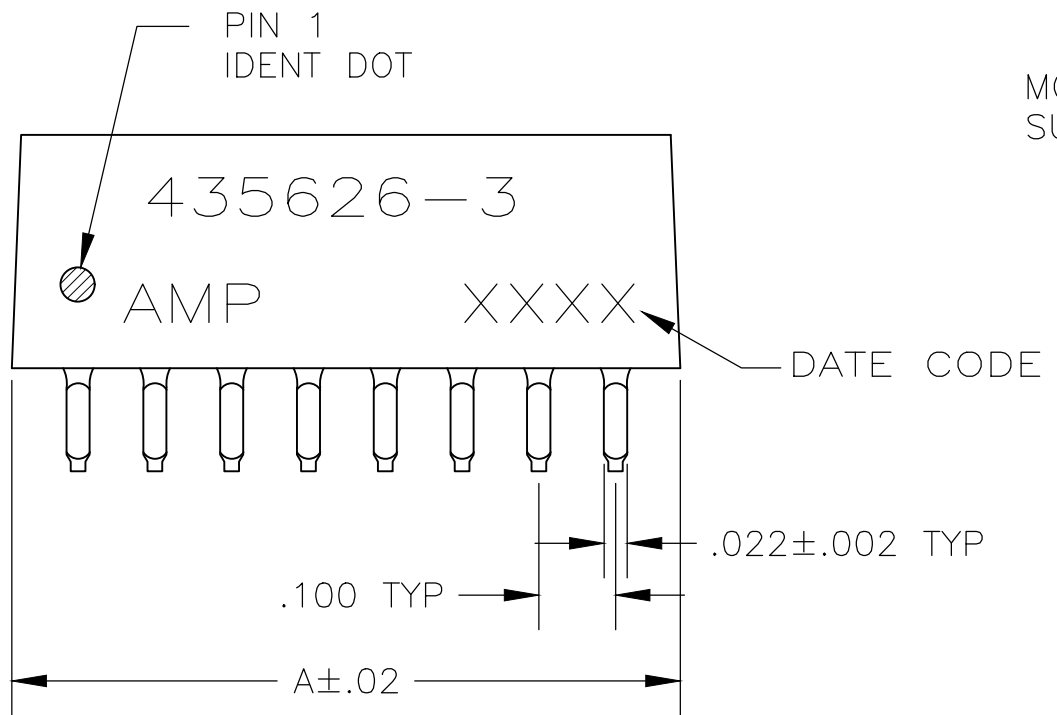


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|----|-----|---------------|-----------|-----|------|
| BG | | ECO-20-004897 | 24AUG2020 | SB | JB |

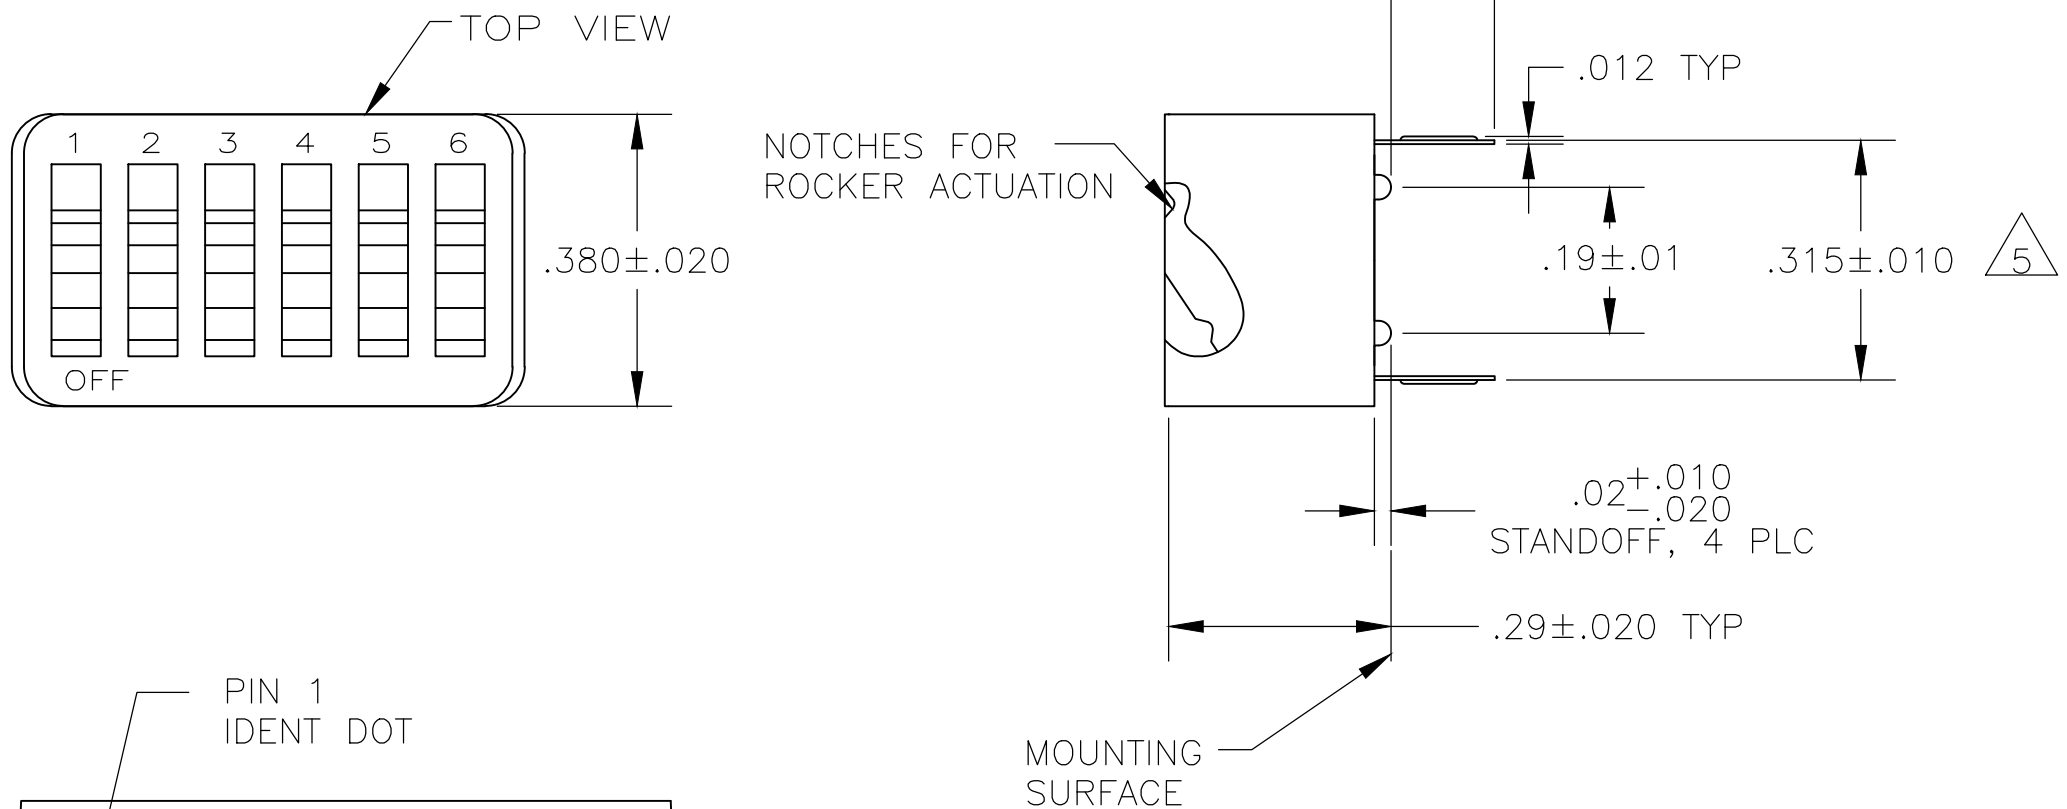

CONTACT ARRANGEMENT

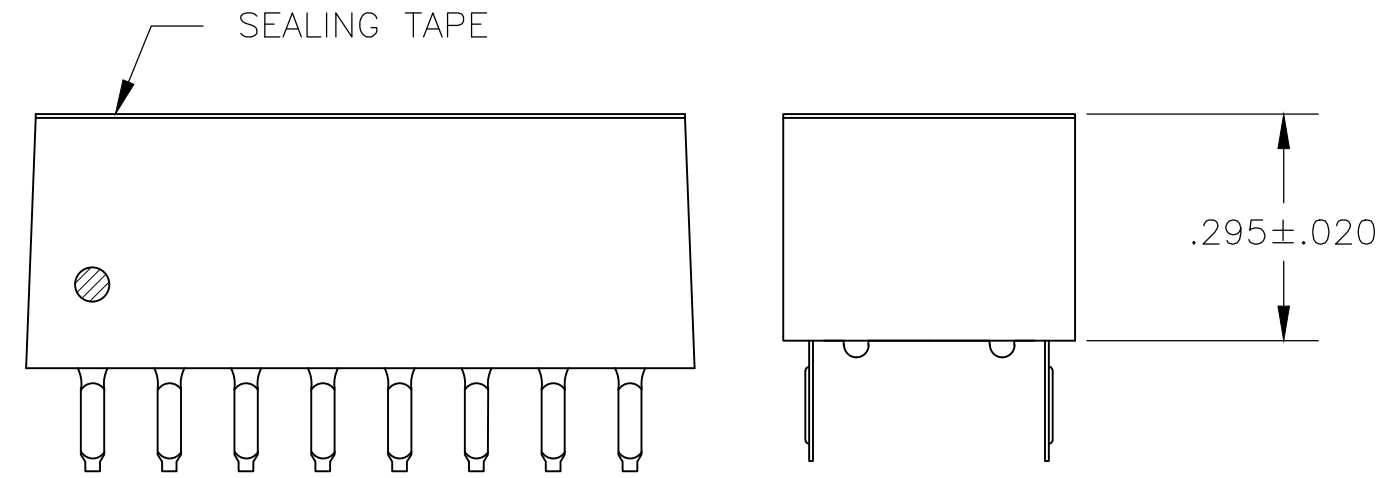


FIG 1

1. FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
2. SWITCH SHOWN IN OPEN POSITION.
3. ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
4. LASER MARKING WILL VARY ON 2 & 3 POSITION SIDES DUE TO SPACE RESTRICTIONS.
5. .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300^{+0.010} AT MOUNTING SURFACE.
6. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
8. MARKS WILL BE ADDED BY LASER MARK PROCESS.

| FIG 1 | POSN. | TERMINAL HEIGHT | TERMINAL WIDTH | TERMINAL SPACING | TERMINAL POSITION |
|----------|-------|-----------------|----------------|------------------|-------------------|
| AS SHOWN | 1 | 1.08 | 10 | 9-435626-4 | |
| | 2 | .88 | 8 | 9-435626-2 | |
| | 3 | .78 | 7 | 9-435626-1 | |
| | 4 | .68 | 6 | 9-435626-0 | |
| | 5 | .48 | 4 | 8-435626-8 | |
| | 6 | .38 | 3 | 8-435626-7 | |
| | 7 | .28 | 2 | 8-435626-6 | |
| | 8 | .88 | 8 | 5-435626-5 | |
| | 9 | .58 | 5 | 5-435626-2 | |
| | 10 | .48 | 4 | 5-435626-1 | |
| | 11 | | | 4-435626-9 | |
| | 12 | 1.28 | 12 | 4-435626-6 | |
| | 13 | 1.08 | 10 | 4-435626-4 | |
| 14 | .98 | 9 | 4-435626-3 | | |
| 15 | .88 | 8 | 4-435626-2 | | |
| 16 | .78 | 7 | 4-435626-1 | | |
| 17 | .68 | 6 | 4-435626-0 | | |
| 18 | .58 | 5 | 3-435626-9 | | |
| 19 | .48 | 4 | 3-435626-8 | | |
| 20 | .38 | 3 | 3-435626-7 | | |
| 21 | .28 | 2 | 3-435626-6 | | |
| 22 | .28 | 2 | 1-435626-9 | | |
| 23 | 1.08 | 10 | 435626-7 | | |
| 24 | .88 | 8 | 435626-5 | | |
| 25 | .78 | 7 | 435626-4 | | |
| 26 | .68 | 6 | 435626-3 | | |
| 27 | .58 | 5 | 435626-2 | | |
| 28 | .48 | 4 | 435626-1 | | |

| | | | | |
|--|---|----------------------------|--|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN R.TALLEY 1-2-90 | TE Connectivity | |
| DIMENSIONS: INCHES | | CHK R.MILLER 1-3-90 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD H.LEITER 1-3-90 | NAME SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, LOW PROFILE | |
| 0 PLC ± - | 1 PLC ± - | PRODUCT SPEC | SIZE A2 | CAGE CODE 00779 |
| 2 PLC ± - | 3 PLC ± .005 | APPLICATION SPEC | DRAWING NO C=435626 | RESTRICTED TO |
| 4 PLC ± - | ANGLES ± - | | SCALE 4:1 | SHEET 1 OF 1 |
| MATERIAL HOUSING & ROCKERS: POLYESTER CONTACTS: BERYLLIUM COPPER | FINISH CONTACTS: PLATED .00030 MIN GOLD IN CONTACT AREA OVER .00050 MIN NICKEL | WEIGHT - | CUSTOMER DRAWING | |
| REV BG | | | | |