

DRAWING MADE IN THIRD ANGLE PROJECTION


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT 19

BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE		APPD	
DF	X0																
												0	REL PER 89-3494-003	1/1/89		ACE	

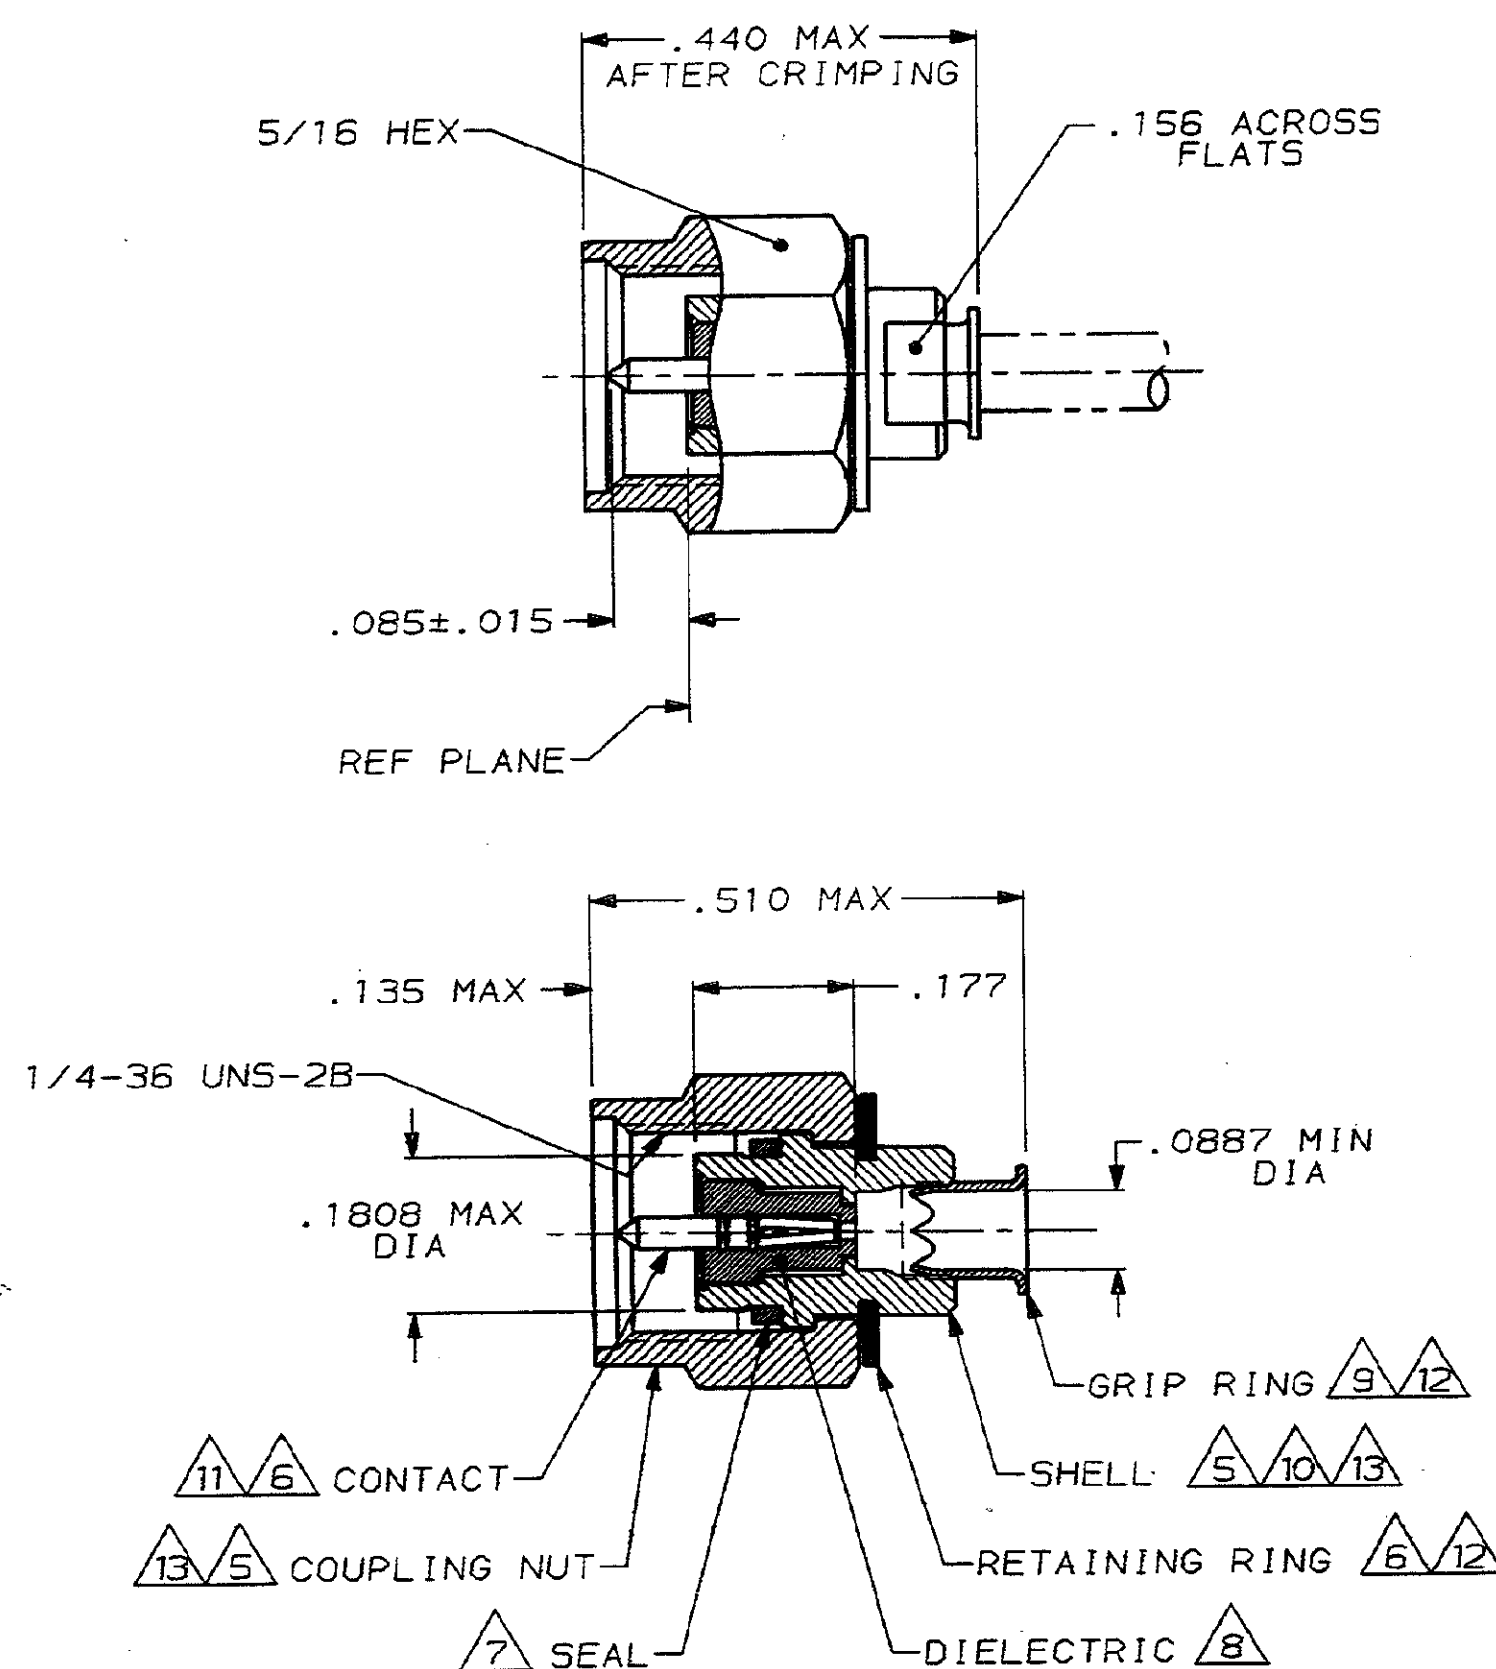

1. FOR USE WITH: RG-405/U, .086 DIA SEMI-RIGID CABLE
2. USE CRIMPING TOOL: 59980-1
USE PNEUMATIC TOOL: 58318-1
3. SEE I.S.: 6788 & 9351
4. .320 MIN LENGTH OF STRAIGHT CABLE REQUIRED TO APPLY TO CONNECTOR
5. STAINLESS STEEL PER ASTM-A-582
6. BERYLLIUM COPPER PER QQ-C-530
7. SILICONE RUBBER PER ZZ-R-765
8. PTFE PER MIL-P-19468
9. BRASS PER MIL-C-50
10. SEALANT
11. GOLD PL PER MIL-G-45204
12. NICKEL PL PER QQ-N-290
13. PASSIVATED PER QQ-P-35
14. FREQUENCY RANGE: 0 TO 26.5 GHZ

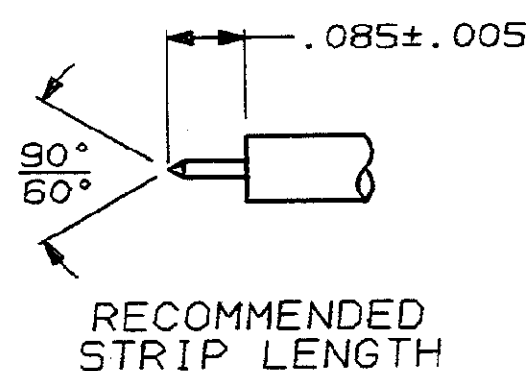

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES
TOLERANCES ON:
2 PLC DEC ± .005
3 PLC DEC ± .005
ANGLES ± .005

MATERIAL

5 THRU 10

FINISH

11 THRU 13

DR 9-20-89

M.E. PASTAL

CHK - E. Remington 9-22-89

APPD - R. J. Smith 10/1/89

APPD - M. E. Pastal 10/1/89

PRODUCT SPEC

108-12089

APPLICATION SPEC

WEIGHT

NAME

PLUG, WEATHERPROOF,
SERIES SMA

SIZE

C

FSCM NO

00779

DRAWING NO

446862-1

SCALE

5:1

SHEET

1 OF 1

446862-1

PART NO

AMP | AMP INCORPORATED
Harrisburg, Pa. 17105

CUSTOMER DRAWING