




- 1

CAVITY LOCATION DIMENSIONS INCREASE IN INCREMENTS OF .125 — TOLERANCE NON-CUMULATIVE
- 2

AMP LOGO MOLDED IN APPROXIMATE AREA SHOWN.
- 3

.000050 GOLD IN CONTACT AREA, .000100—.000200 TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 4

.000030 GOLD IN CONTACT AREA, .000100—.000200 TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.

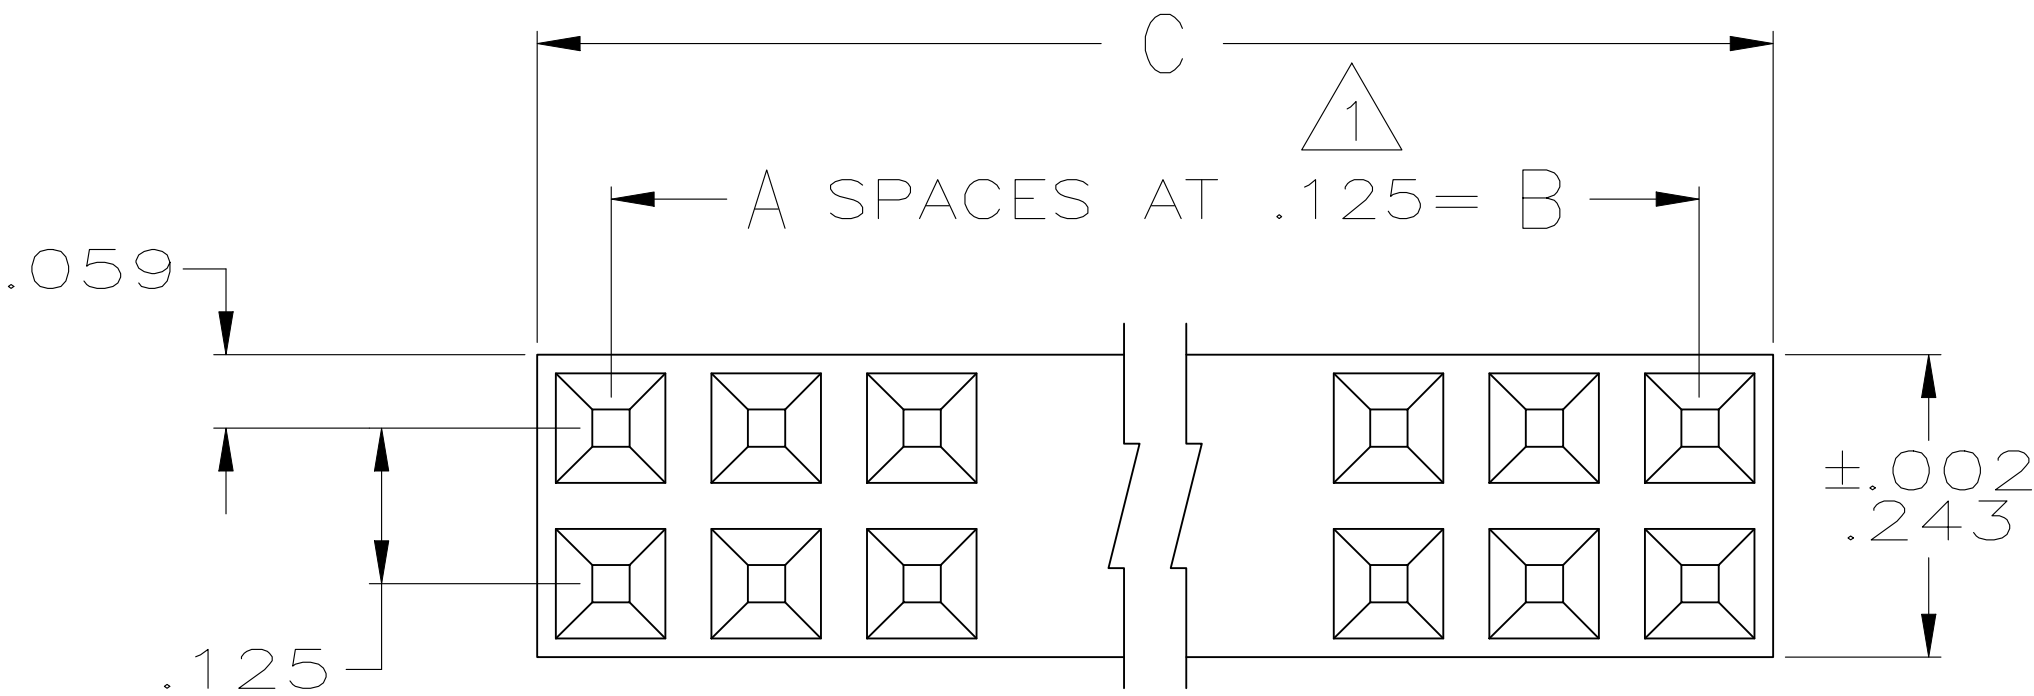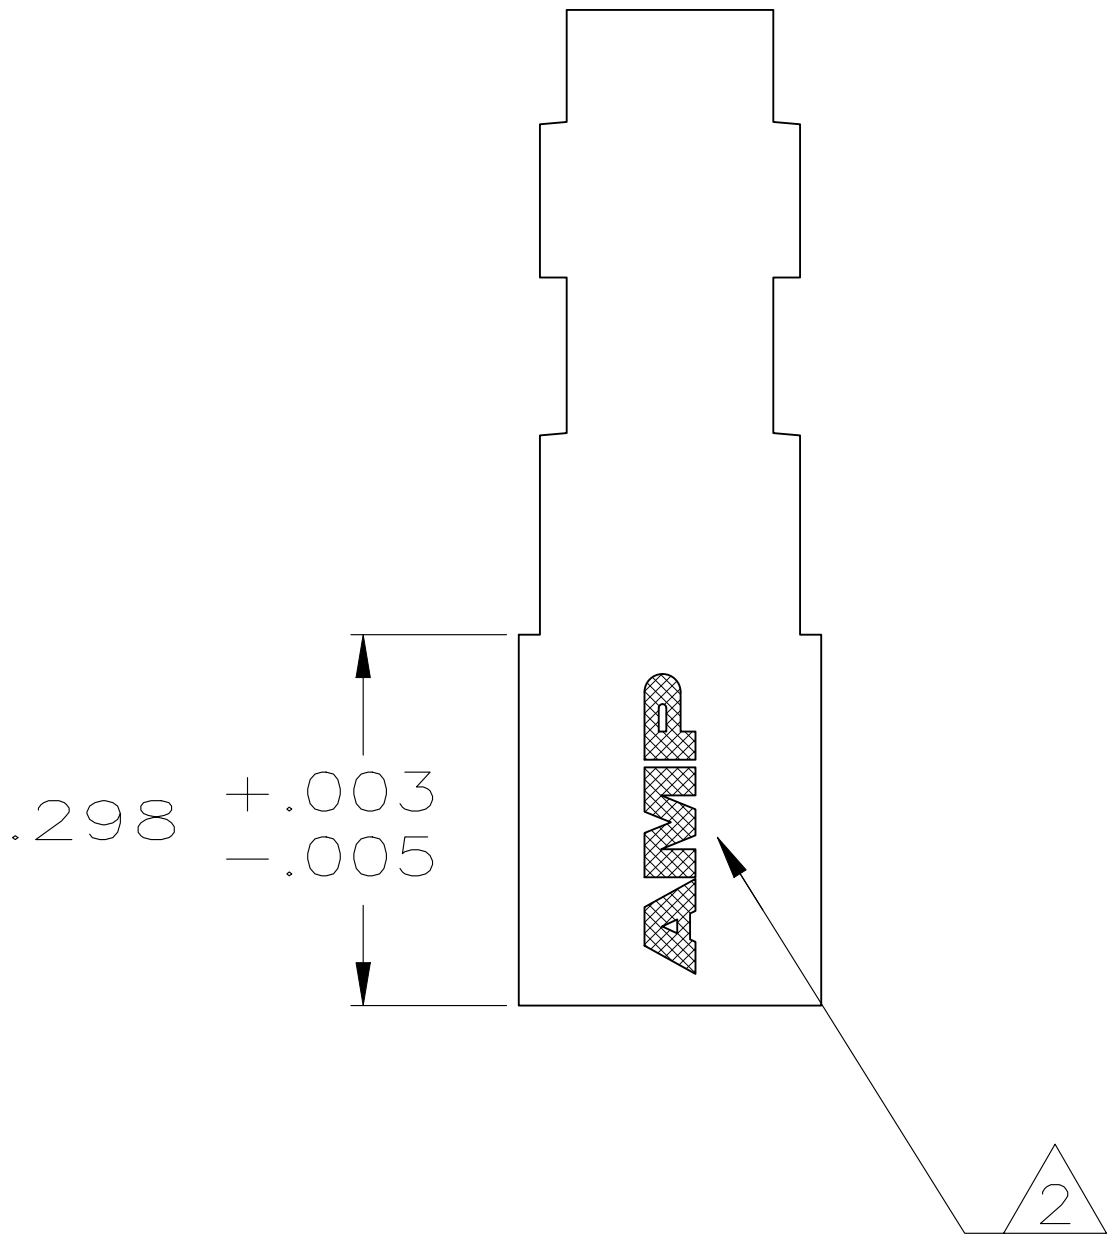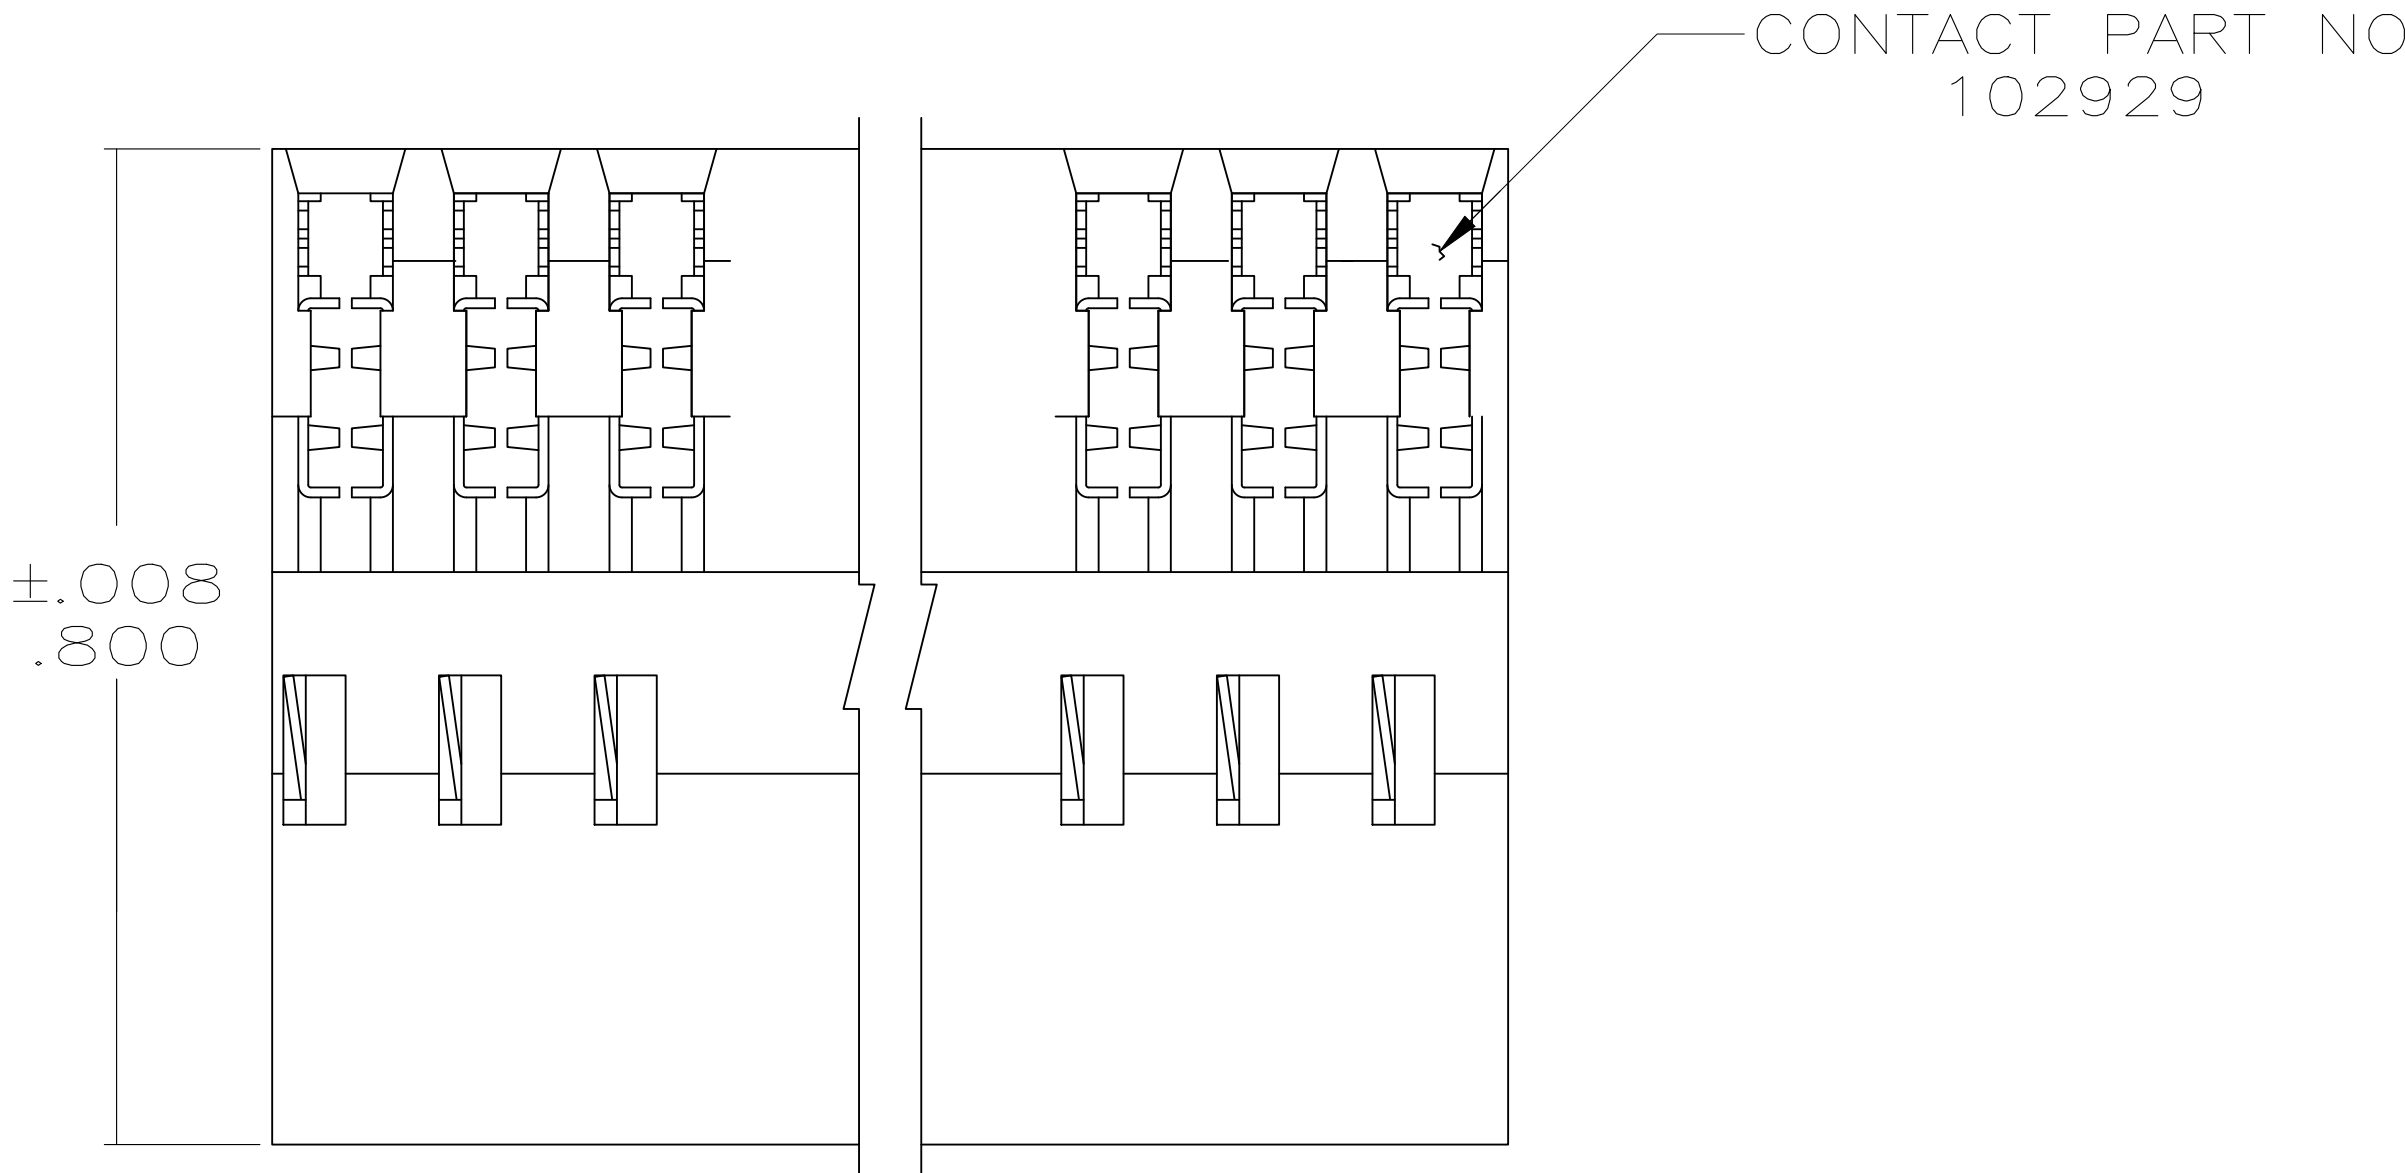

	4	1.868	1.750	14	30	5-5102935-7
	3	2.493	2.375	19	40	3-5102935-6
OBSOLETE	3	1.993	1.875	15	32	2-5102935-8
	3	1.493	1.375	11	24	1-5102935-9
	3	1.243	1.125	7	20	1-5102935-6
	3	.993	.875	9	16	1-5102935-2
	3	.743	.625	5	12	5102935-8
	3	.618	.500	4	10	5102935-6
	3	.493	.375	3	8	5102935-4
	3	.368	.250	2	6	5102935-2
REMARKS	FINISH	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER