

SPECIFICATION CONTROL DRAWING

SCD

55OTE2232

Title
THREE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, GENERAL PURPOSE, 600 VOLT

Date
6-6-18


Revision
B

This specification sheet forms a part of the latest issue of Raychem Specification 55OTE.

COMPONENT WIRES - 55PC0212

SHIELD - SILVER-COATED COPPER

JACKET - ENHANCED, OPTIMIZED, AND TOUGHENED
RADIATION-CROSSLINKED,
MODIFIED ETFE

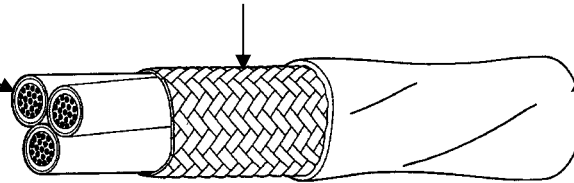

CABLE CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004 in.) (mm)	JACKET THICKNESS (inch) (mm)		OUTSIDE DIAMETER (inch) (mm)			WEIGHT (lbs/1000 ft.) (kg/km)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55OTE2232-26-*	26	.0015 (.038)	.0060 (.152)	.0080 (.203)	.094 (2.39)	.099 (2.51)	.104 (2.64)	7.91 (11.77)	8.50 (12.65)
55OTE2232-24-*	24	.0015 (.038)	.0060 (.152)	.0080 (.203)	.103 (2.62)	.109 (2.77)	.114 (2.90)	9.76 (14.52)	10.42 (15.51)
55OTE2232-22-*	22	.0015 (.038)	.0065 (.165)	.0085 (.216)	.117 (2.97)	.123 (3.12)	.128 (3.25)	13.20 (19.64)	13.92 (20.72)
55OTE2232-20-*	20	.0015 (.038)	.0065 (.165)	.0085 (.216)	.135 (3.43)	.141 (3.58)	.146 (3.71)	18.44 (27.44)	19.25 (28.65)
55OTE2232-18-*	18	.0015 (.038)	.0065 (.165)	.0085 (.216)	.156 (3.96)	.161 (4.09)	.167 (4.24)	26.00 (38.69)	27.05 (40.25)
55OTE2232-16-*	16	.0015 (.038)	.0070 (.178)	.0090 (.229)	.173 (4.39)	.179 (4.55)	.184 (4.67)	32.26 (48.01)	33.46 (49.79)
55OTE2232-14-*	14	.0015 (.038)	.0070 (.178)	.0090 (.229)	.205 (5.21)	.211 (5.36)	.217 (5.51)	47.33 (70.43)	48.81 (72.64)
55OTE2232-12-*	12	.0015 (.038)	.0070 (.178)	.0090 (.229)	.246 (6.25)	.252 (6.40)	.259 (6.58)	69.85 (103.95)	71.67 (106.66)
55OTE2232-10-*	10	.0015 (.038)	.0075 (.191)	.0095 (.241)	.297 (7.54)	.305 (7.75)	.313 (7.95)	106.97 (159.19)	109.77 (163.36)

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
TE Connectivity also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx"). OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.





CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

CROSSLINKED VERIFICATION: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

+ FLEXURE ENDURANCE: No failure at 200 cycles

FLUORIDE EXTRACTION: 70 ± 2°C for 168 hours, 150 ppm (maximum)

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (34.5 MPa) (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms)

Impulse Dielectric Test, 6.0 kV (peak)

+ PULL THROUGH: No jacket tearing, no dielectric breakdown

+ SCRAPE ABRASION:

5000 cycles (minimum average) at 23 ± 2°C

3000 cycles (minimum average) at 70 ± 2°C

100 cycles (minimum average) at 150 ± 2°C

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND (Post Environmental): 1000 volts (rms), 60 Hz, 1 minute

1/ PART NUMBER:

The "*" in the part numbers on page 1 shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Colors shown do not necessarily reflect the sequence of manufacturing.

Example: AWG 20, red, yellow, and blue component wires; white jacket:
55OTE2232-20-2/4/6-9

+ NOTE: The requirements for the Flexure Endurance, Pull Through, and Scrape Abrasion tests are applicable when tested on a 20 AWG single component, silver-coated copper flat braid shielded and jacketed cable only.