SPECIFICATIONS

ELECTRICAL

RESISTANCE: 20KΩ ±10% ELECTRICAL ANGLE: 325° CONTINUITY ANGLE: 350°MIN LINEARITY: ±1.0%, INDEPENDENT MINIMUM VOLTAGE: 0.1% MAX **RESOLUTION: VIRTUALLY INFINITE OUTPUT SMOOTHNESS: 0.1% MAX**

RESISTANCE TEMPERATURE COEFFICIENT: 400 PPM/°C MAX

POWER RATING: 0.5 WATT MAX @ 70°C,

DERATED TO 0.0 WATT @ 125°C

WIPER CONTACT CURRENT: 10 MILLIAMPS MAX

DIELECTRIC STRENGTH: 500 VRMS @ 60 Hz

INSULATION RESISTANCE: 100 MEG OHMS @ 500 VDC

MECHANICAL

ROTATION: CONTINUOUS 360° WEIGHT: (1 GANG) 0.7 OZ MAX MECH BACKLASH: <0.1° START TORQUE: 0.2 OZ-IN MAX, **RUNNING TORQUE: 0.15 OZ-IN MAX**

PILOT RUNOUT: 0.001 T.I.R. SHAFT RUNOUT: 0.001 T.I.R. SHAFT END PLAY: 0.003 MAX SHAFT RADIAL PLAY: 0.001 T.I.R. LATERAL RUNOUT: 0.002 T.I.R.

ENVIRONMENTAL

OPERATING TEMPERATURE: -65°C TO +125°C ROTATIONAL LIFE: 50 MILLION REVOLUTIONS MIN DITHER LIFE: 50 MILLION CYCLES @ 60HZ OVER 5° SHOCK: SAWTOOTH 100G PEAK PER MIL-STD-202 METHOD 213, TEST CONDITION I

VIBRATION: HIGH FREQ; SWEPT 10 - 2000HZ, 15G PEAK PER MIL-STD-202 TEST CONDITION B

MATERIALS

HOUSING: ANODIZED ALUMINUM

SHAFT: PASSIVATED CENTERLESS GROUND SST

BEARINGS: PRECISION MINIATURE BALL

ROTOR: BERYLLIUM COPPER


CONTACTS: MULTI-FINGER PRECIOUS METAL ELEMENT: CO-MOLDED CONDUCTIVE PLASTIC

TERMINALS: GOLD PLATED BRASS

UNLESS OTHERWISE SPECIFIED


ALL ELECTRICAL, MECHANICAL, AND ENVIRONMENTAL

SPECIFICATIONS ARE IAW MIL-PRF-39023



INCREASING FUNCTION VIEWED FROM SHAFT END



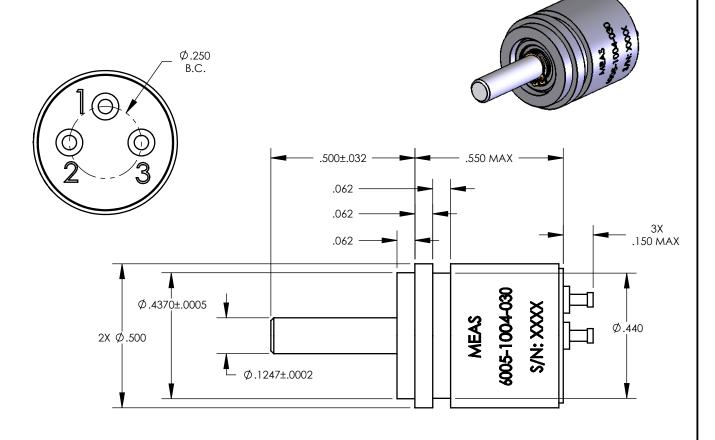

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MEASUREMENT SPECIALITIES. ANY OLE WITHOUT THE WRITTEN PERMISSION OF MEASUREMENT SPECIALITIES IS STRICTLY PROHIBITED.

DIMENSIONS ARE IN INCHES		
TOLERANCES: ANGULAR ± 2° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005 FOUR PLACE DECIMAL ± .0005	DRAWN	Г
	CHECKED	Г
	ENG APPR.	Г
	MFG APPR.	Г
ATERIAL	Q.A.	

NOIFD Information in this box is for

NOTED DO NOT SCALE DRAWING 10/12/92 S P E C I A L T I E S TM

POTENTIOMETER

measurement

5W885

DATE

D. TREE

Engineering Reference Only

CAGE CODE DWG. NO. 6005-1004-030