



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
IS	-		51	First issue	06NOV2006	AM
			52	Added cap	20NOV2006	AM
			A	Release to production	05DEC2006	AM
			A1	Added indentification mark	22JAN2007	AM


Partial section A-A

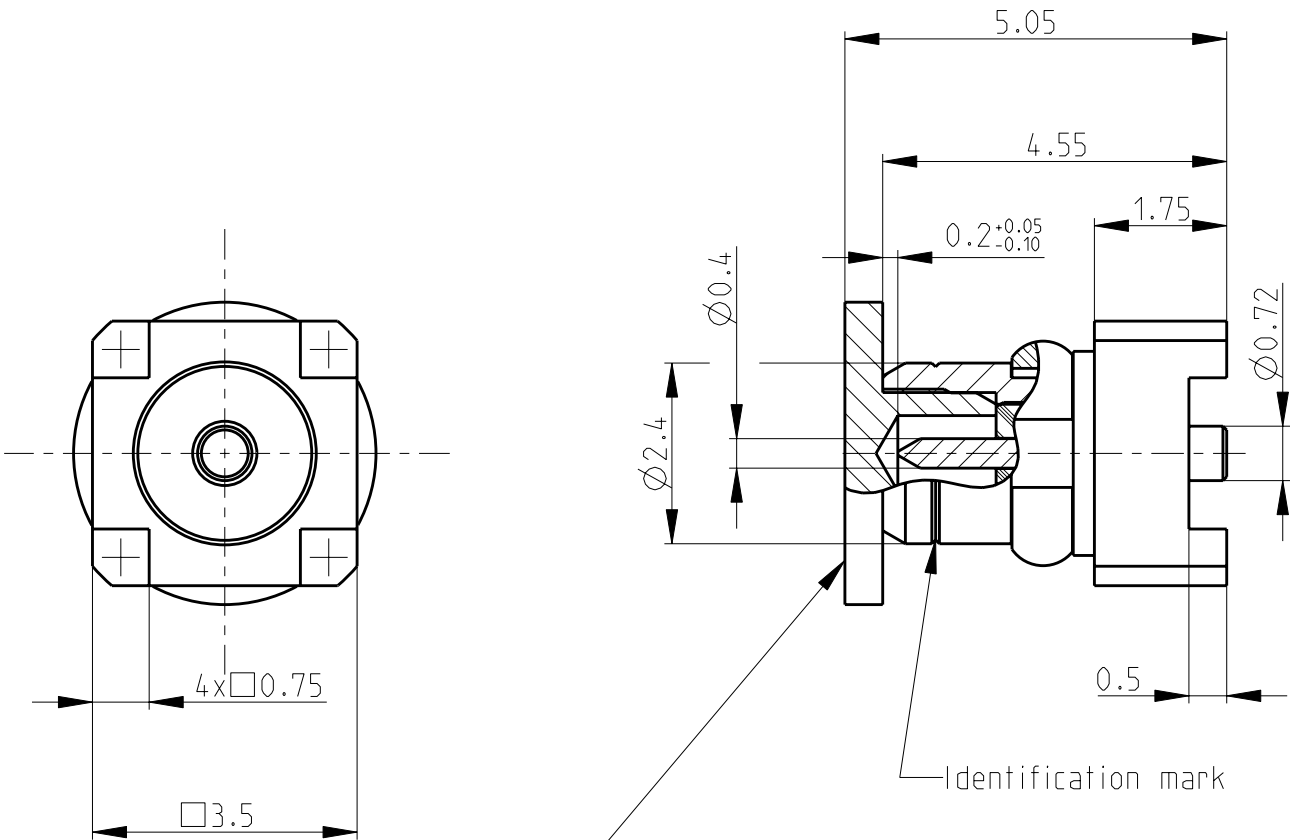

RECOMENDED PCB LAYOUT
TOLERANCE : ± 0.05

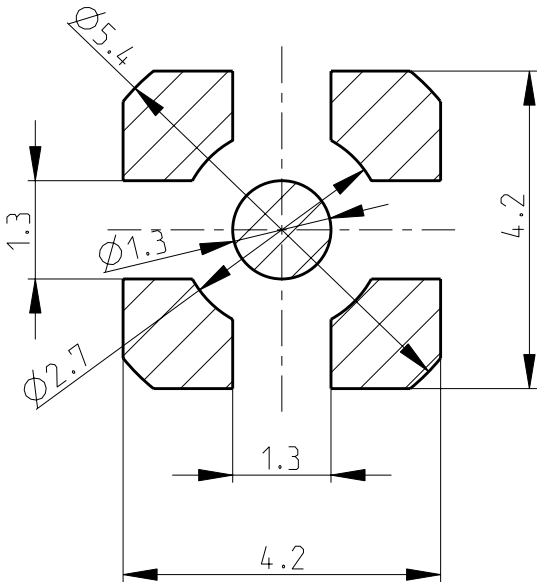


Tape detail
1:5

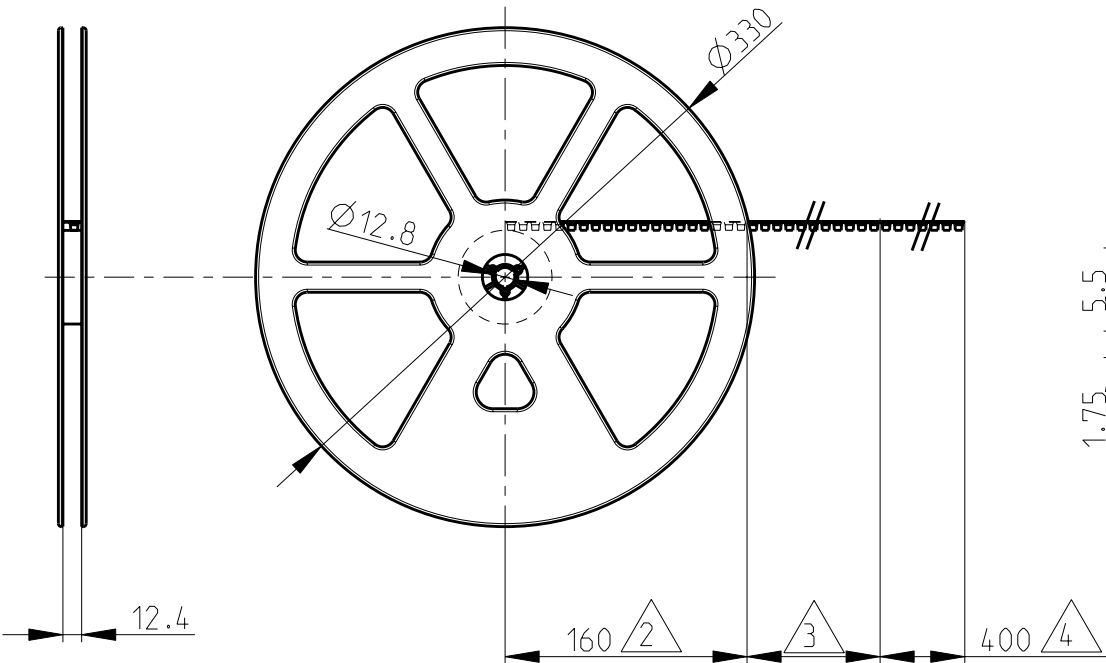

Packaging : 1000 pcs in tape on reel according IEC 60286-3
Further characteristic as per EIA-481

Suggested Pick and place dimension : Ø 4 mm

- 1 GENERAL TOLERANCES: ISO 2768-m-H
- 2 Last running acc. to IEC 60286-3
- 3 Blister belt filled with parts
- 4 400mm empty blister belt, sealed with cover tape



3D view
5:1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN A.Mariotti 06NOV2006	tyco Electronics tyco Electronics Lugano (Switzerland)			
DIMENSIONS: mm		CHK D. Bozzer 06NOV2006				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME MMCX plug PCB SMD			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±1°		PRODUCT SPEC -	SIZE A3			
MATERIAL -		APPLICATION SPEC -	CAGE CODE 00779			
FINISH -		WEIGHT -	DRAWING NO 619286			
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1		REV A1