
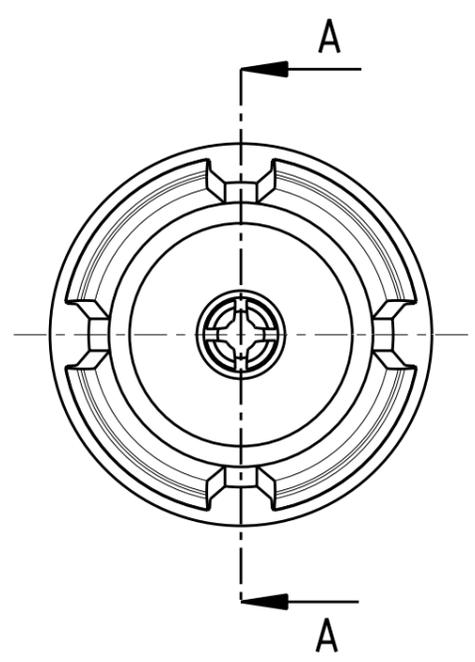
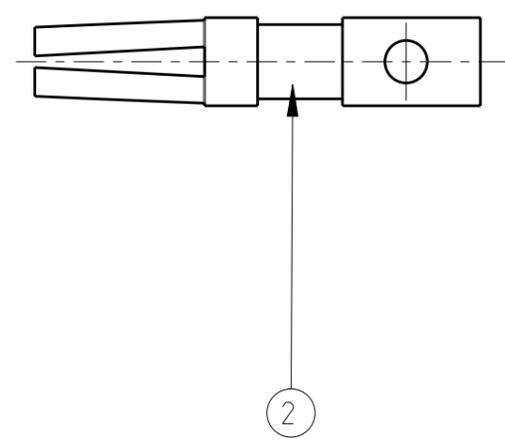


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION


© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
IS	-	51	First issue	08AUG2007	AM DB
		52	Update drawing	30AUG2007	AM DB
		A	Released to production	23JUL2008	MG DB


Partial section A-A

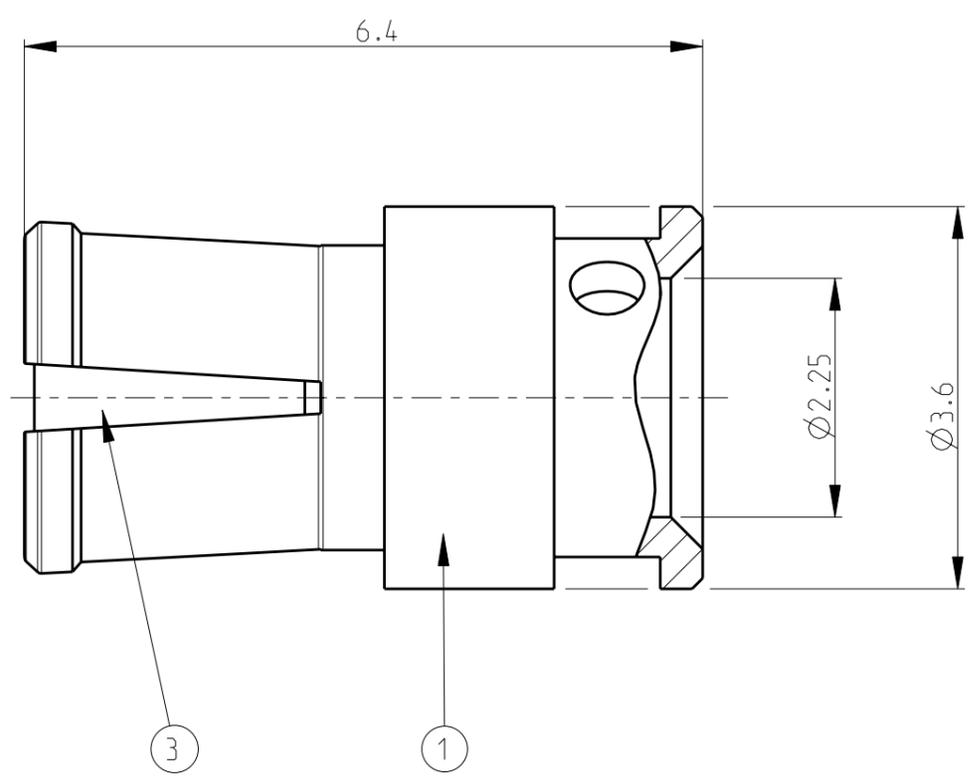

- 1) Interface according to MIL-STD-348A. Characteristic impedance 50 Ohm.
- 2) General tolerances acc.to ISO 2768-mH
- 3) Bulk packaging.



Cable stripping dimensions

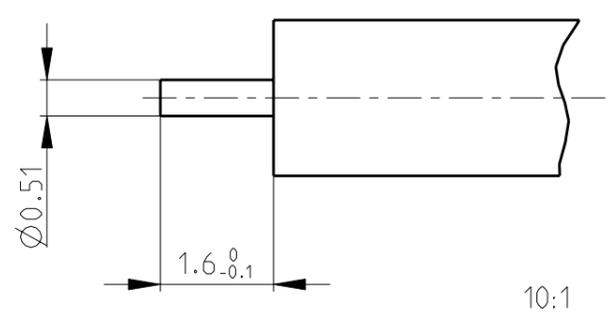

TE Nr	Item	Qty	Description	Material	Plating
619335-1	3	1	Dielectric	PTFE	-
	2	1	Cent. conductor	CuBe	min. 0.1µm Au over min. 2µm NiP
	1	1	Body	CuBe	min. 0.1µm Au over min. 2µm NiP

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN 08AUG2007 A.Mariotti		tyco Electronics CH-Switzerland-Lugano	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME SMP Straight Plug Cable Solder RG 405	
		PRODUCT SPEC 108-71081 APPLICATION SPEC 114-71040		SIZE A3 CAGE CODE C-619335	
MATERIAL -		FINISH -		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 15:1 SHEET 1 OF 1 REV A	