
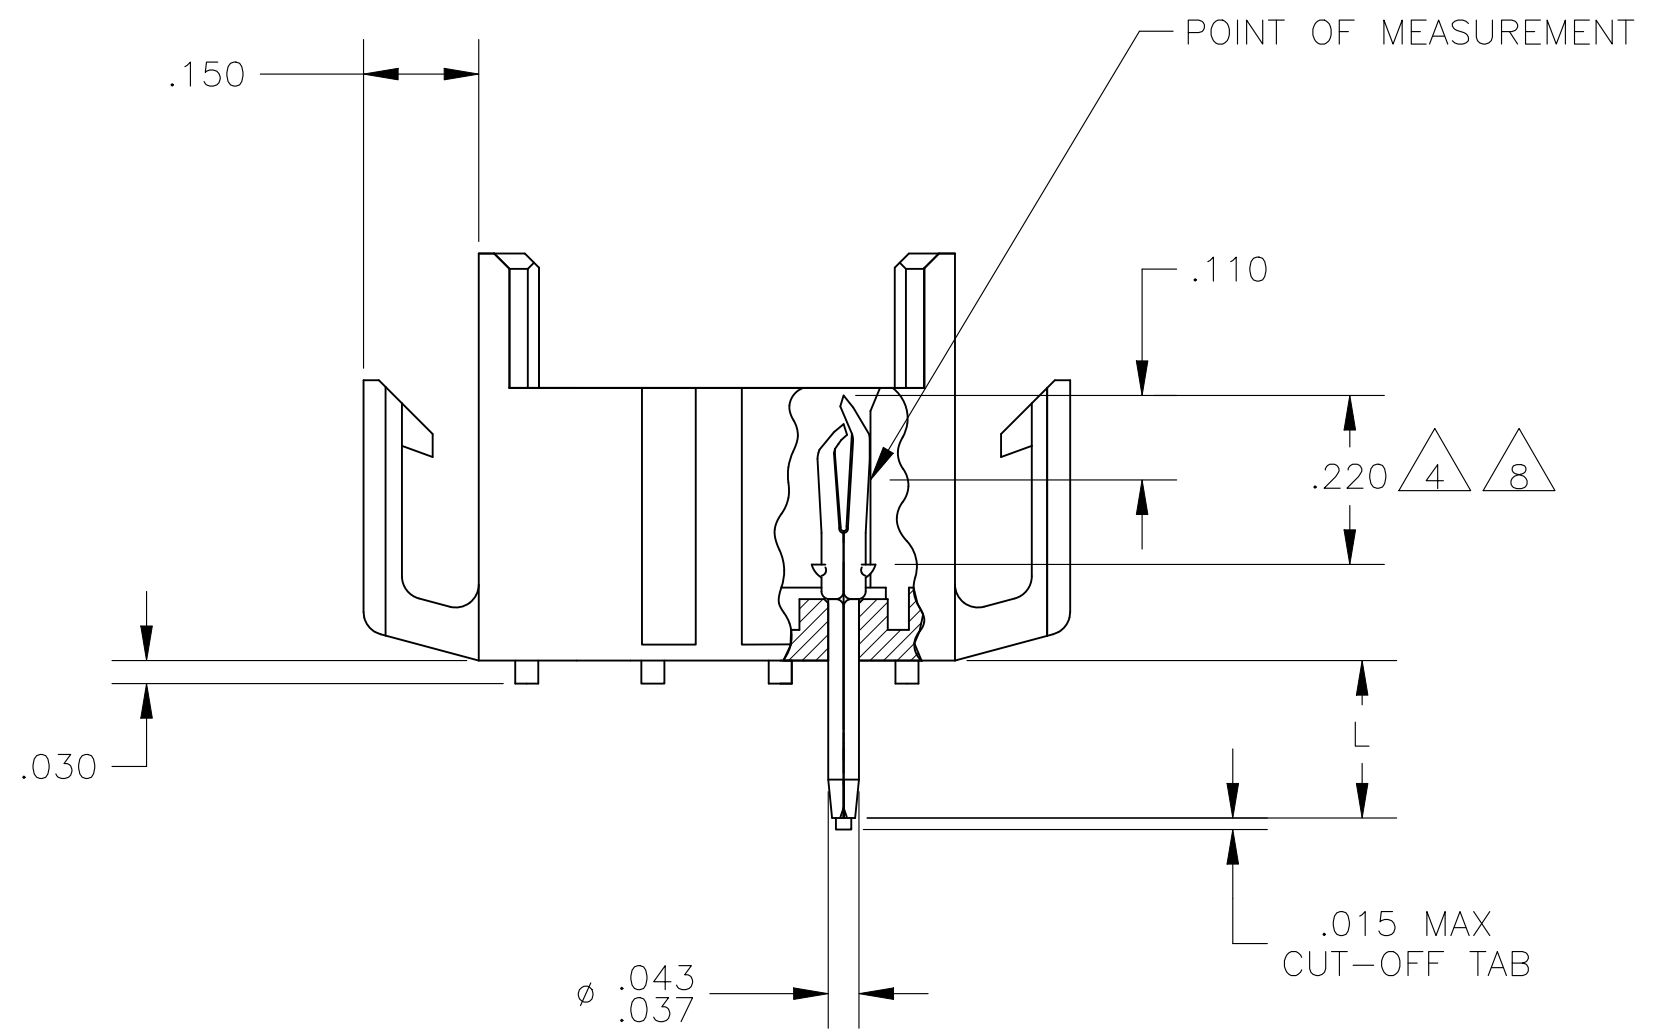
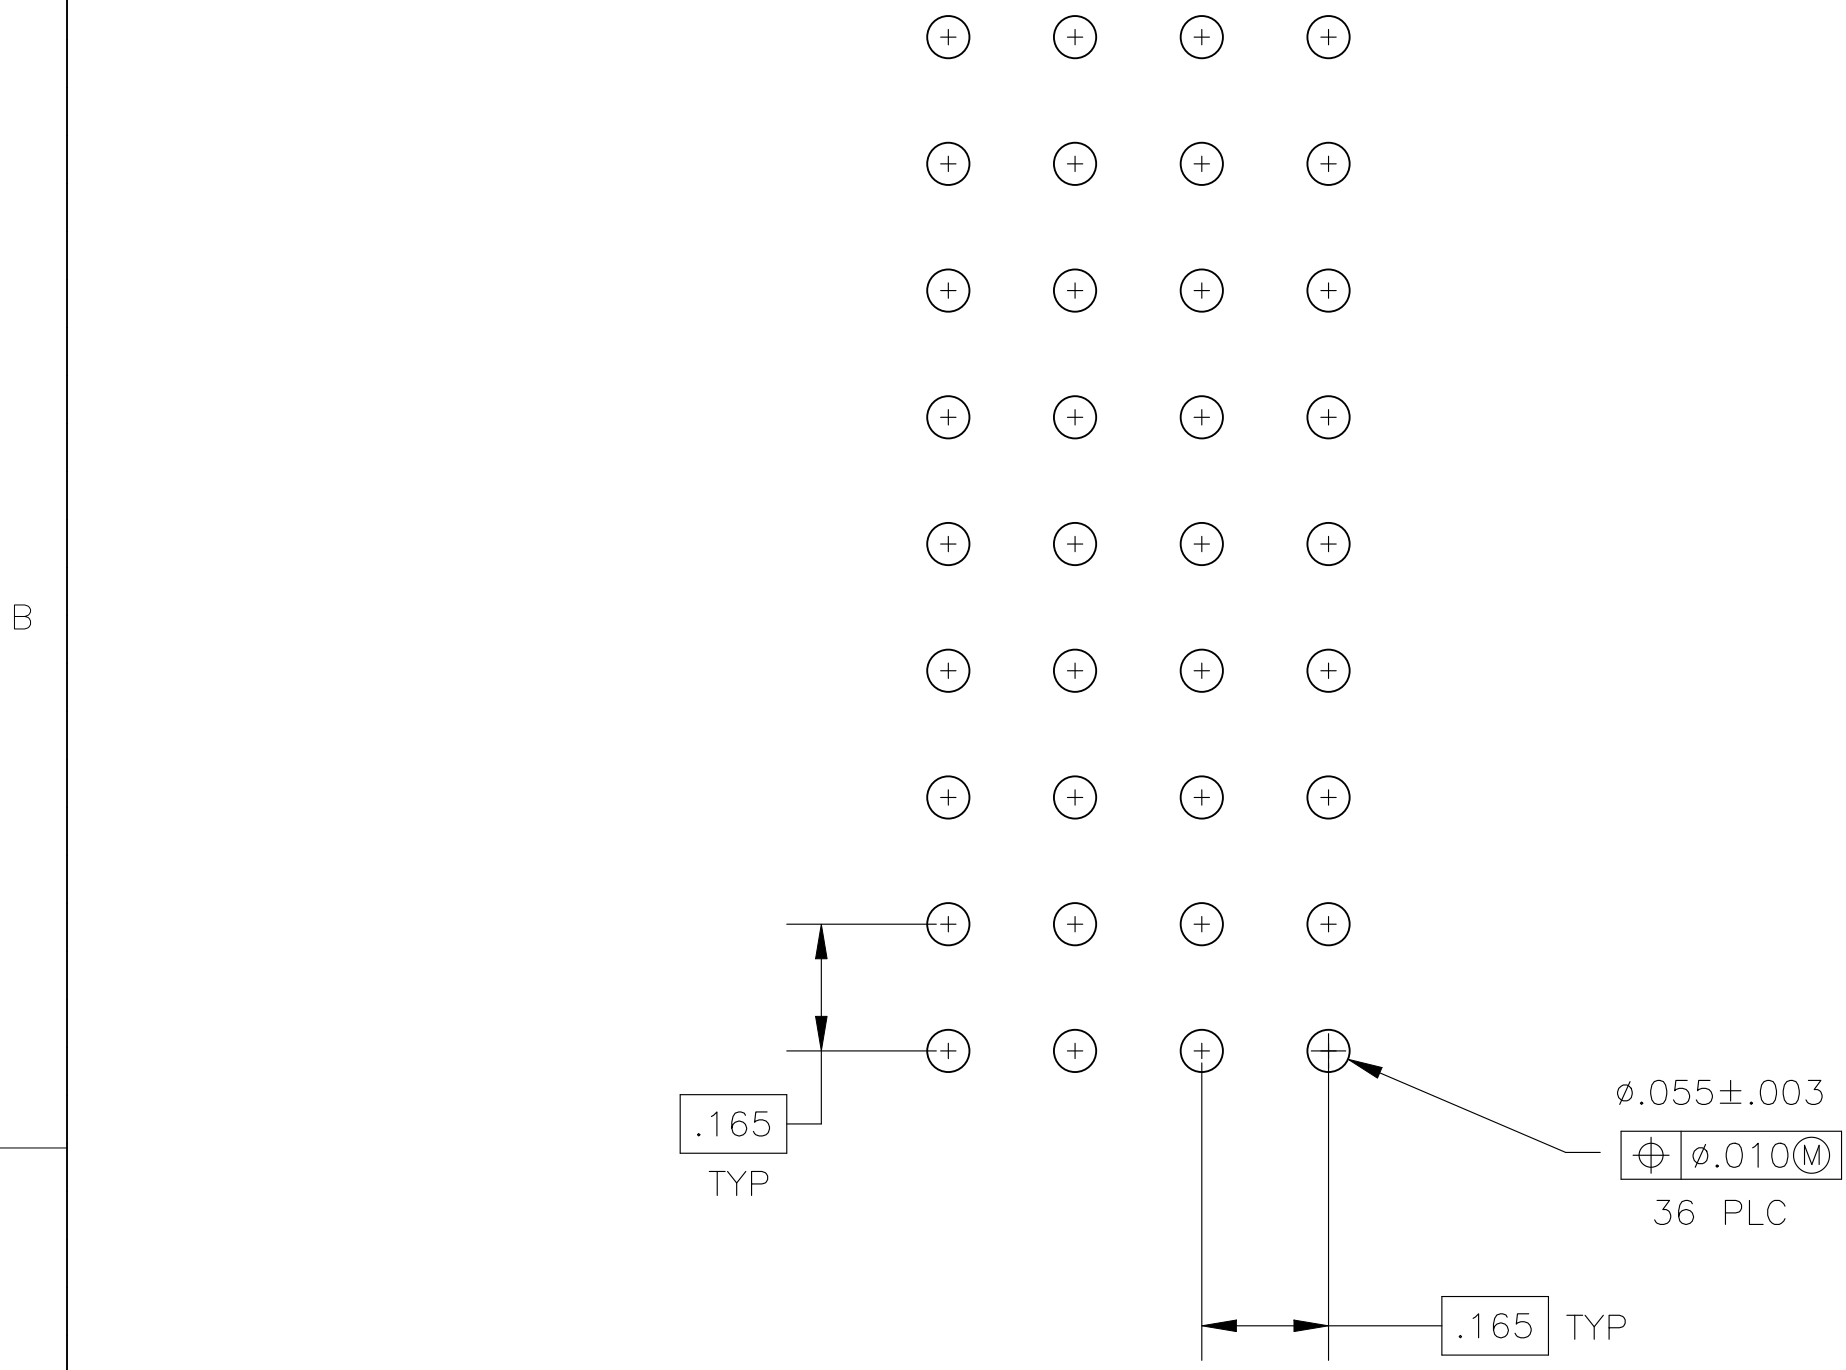


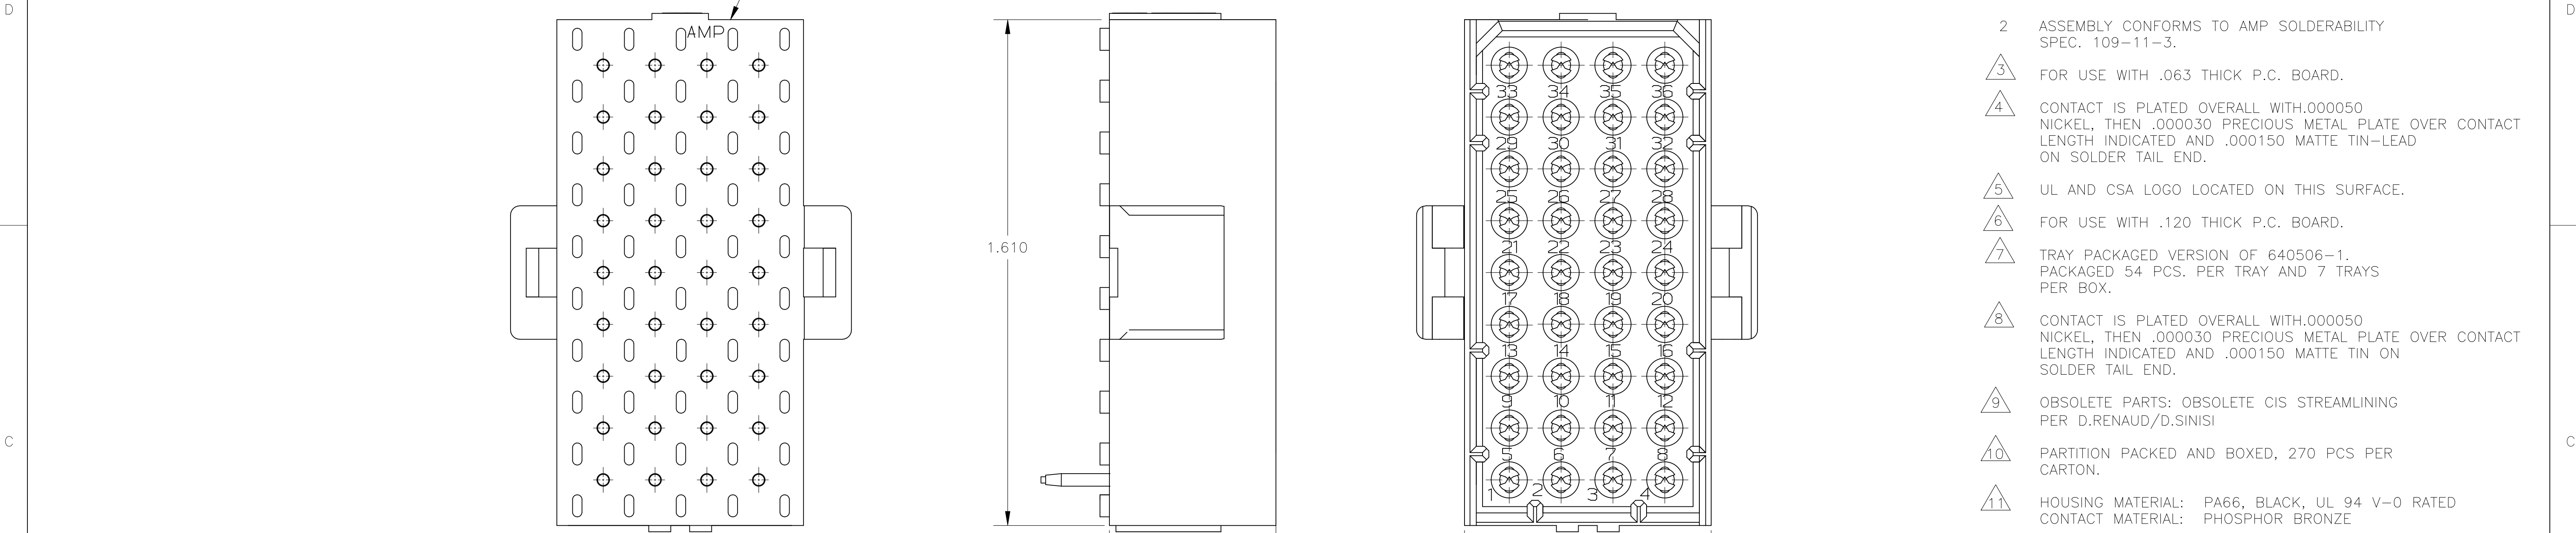

10	OBSOLETE	.210	6	GOLD	4	-1-640506-4	
		.210	6	PRECIOUS METAL PLATE	8	2-640506-4	
		.150	3	PRECIOUS METAL PLATE	8	2-640506-2	
7	9	OBSOLETE	.150	3	PRE-TIN	-1-640506-0	
			.210	6	PRECIOUS METAL PLATE	4	640506-4
			.210	6	PRE-TIN		640506-3
			.150	3	PRECIOUS METAL PLATE	4	640506-2
			.150	3	PRE-TIN		640506-1
			"L" +.010 -.020	PIN FINISH	PART NUMBER		

.015	0.38	.110	2.79	1.610	40.89
.010	0.25	.063	1.60	.785	19.94
.008	0.20	.055	1.40	.530	13.46
.005	0.13	.043	1.09	.220	5.59
.003	0.08	.037	0.94	.210	5.33
.000050	0.00127	.030	0.76	.165	4.19
.000030	0.00076	.020	0.51	.150	3.81
IN	MM	IN	MM	IN	MM

CONVERSION TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC ± -

1. PLC ± -

2. PLC ± -

3. PLC ± .005

4. PLC ± -

ANGLES ± 0° 30'

MATERIAL 11

FINISH SEE FINISH

DWN J. HUFFMAN 28 APR 98

CHK R. SWING 28 APR 98

APVD T. REDDICK 28 APR 98

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

NAME

SIZE CAGE CODE DRAWING NO

RESTRICTED TO

SCALE 4:1

SHEET 1 OF 1

REV W

TE Connectivity

HEADER ASSEMBLY, PIN, 36 POSITION MR.

A100779640506