
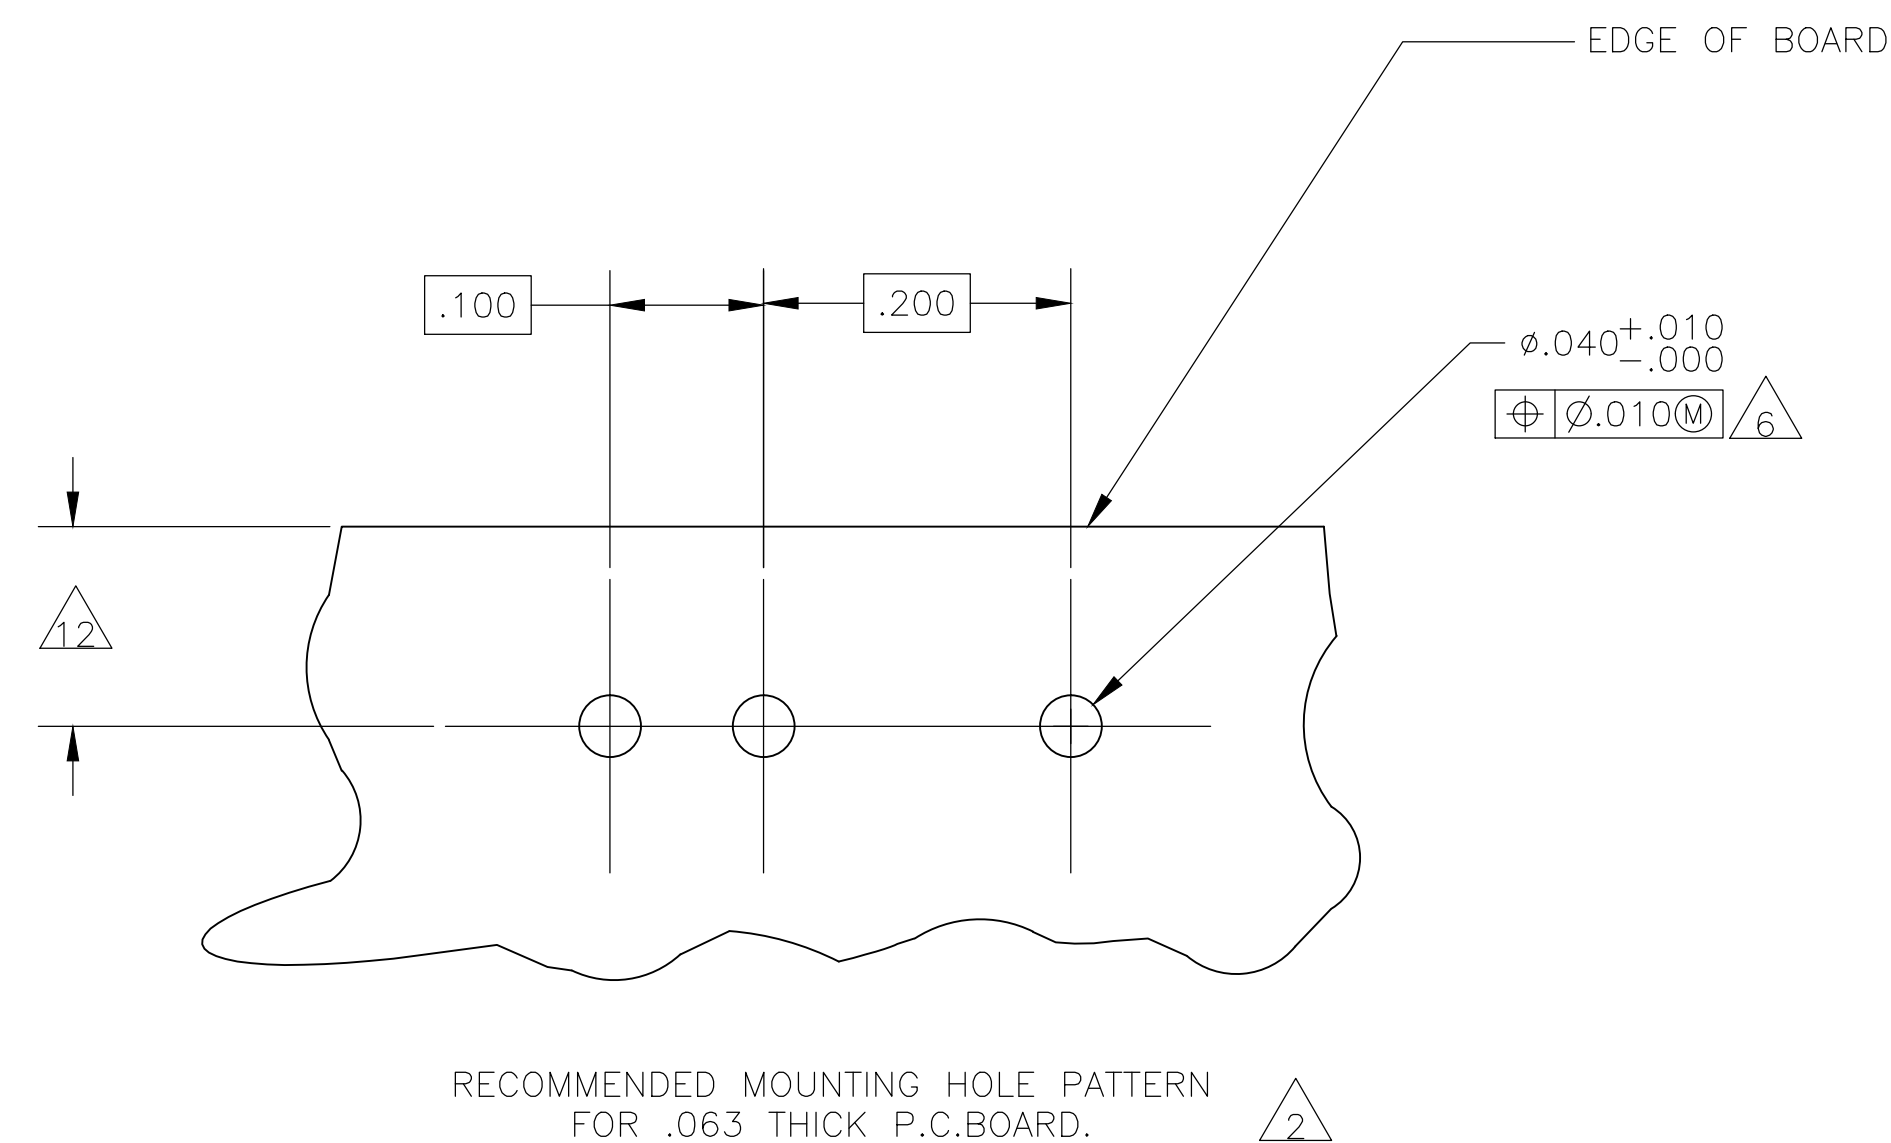
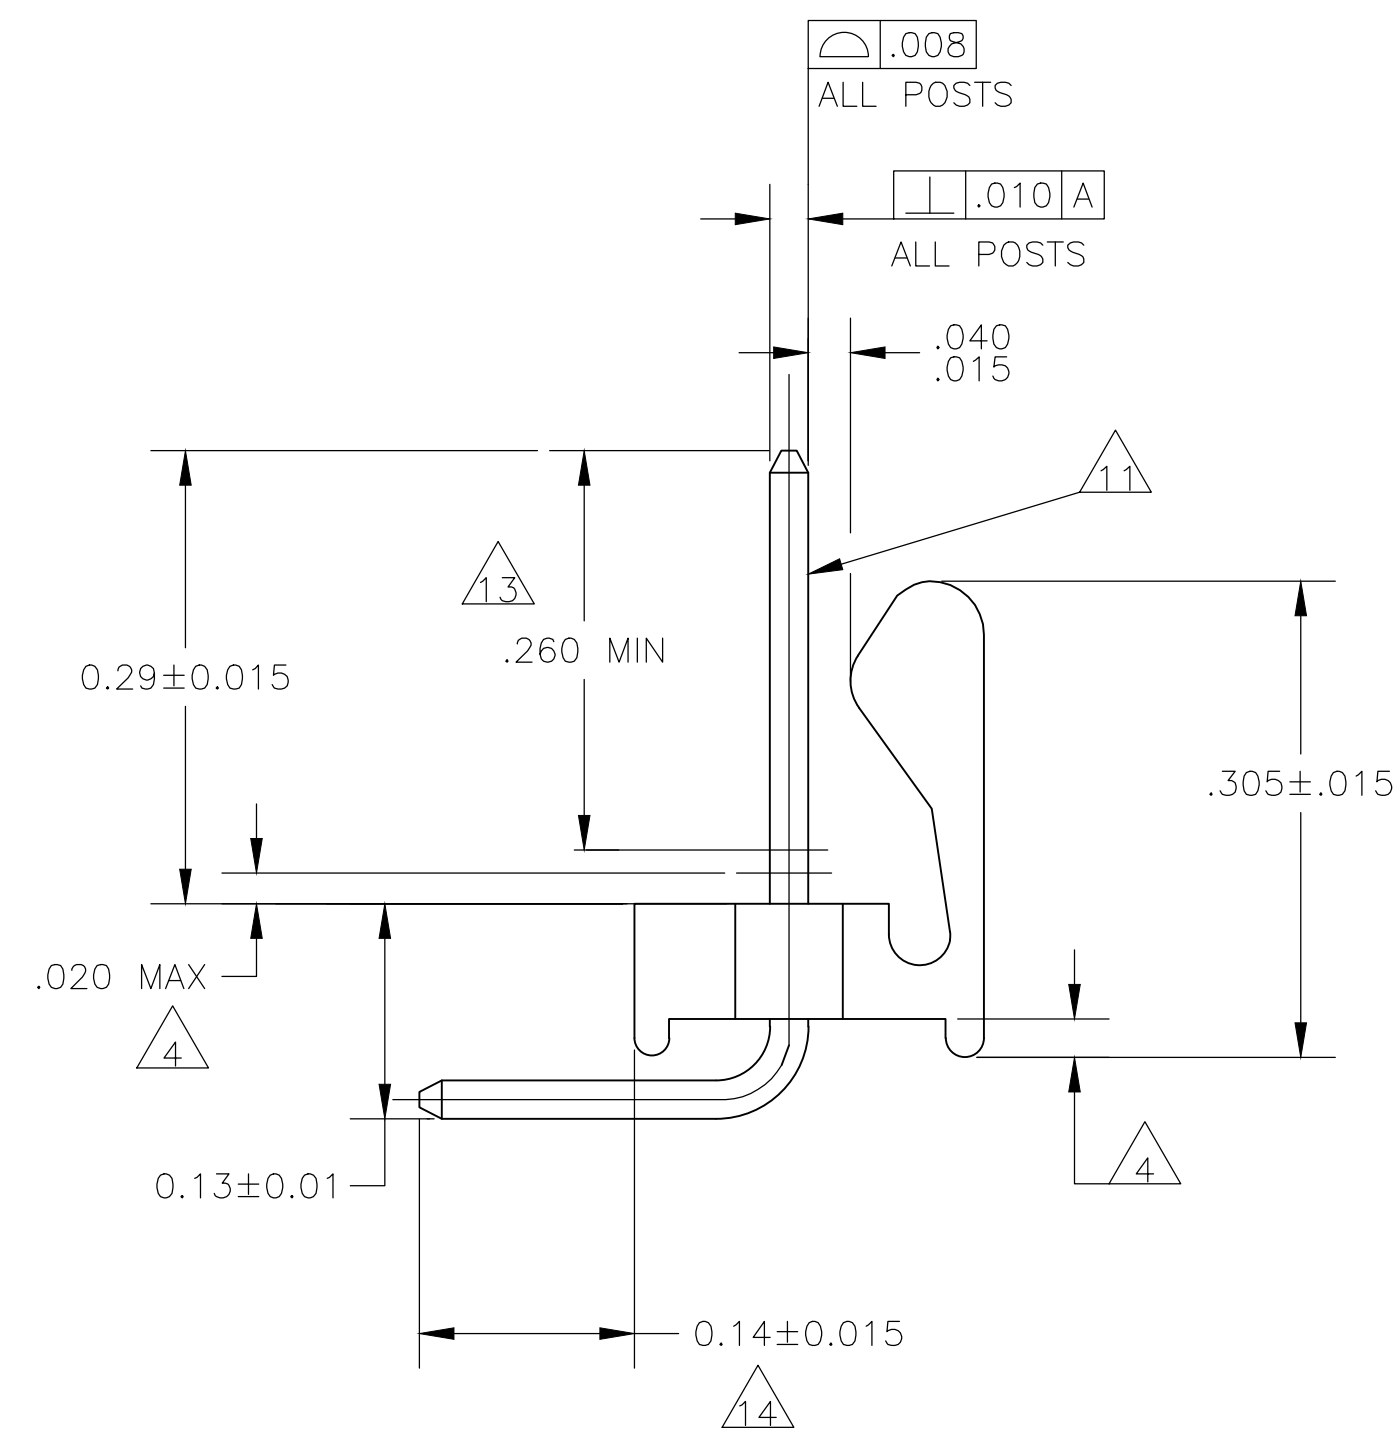
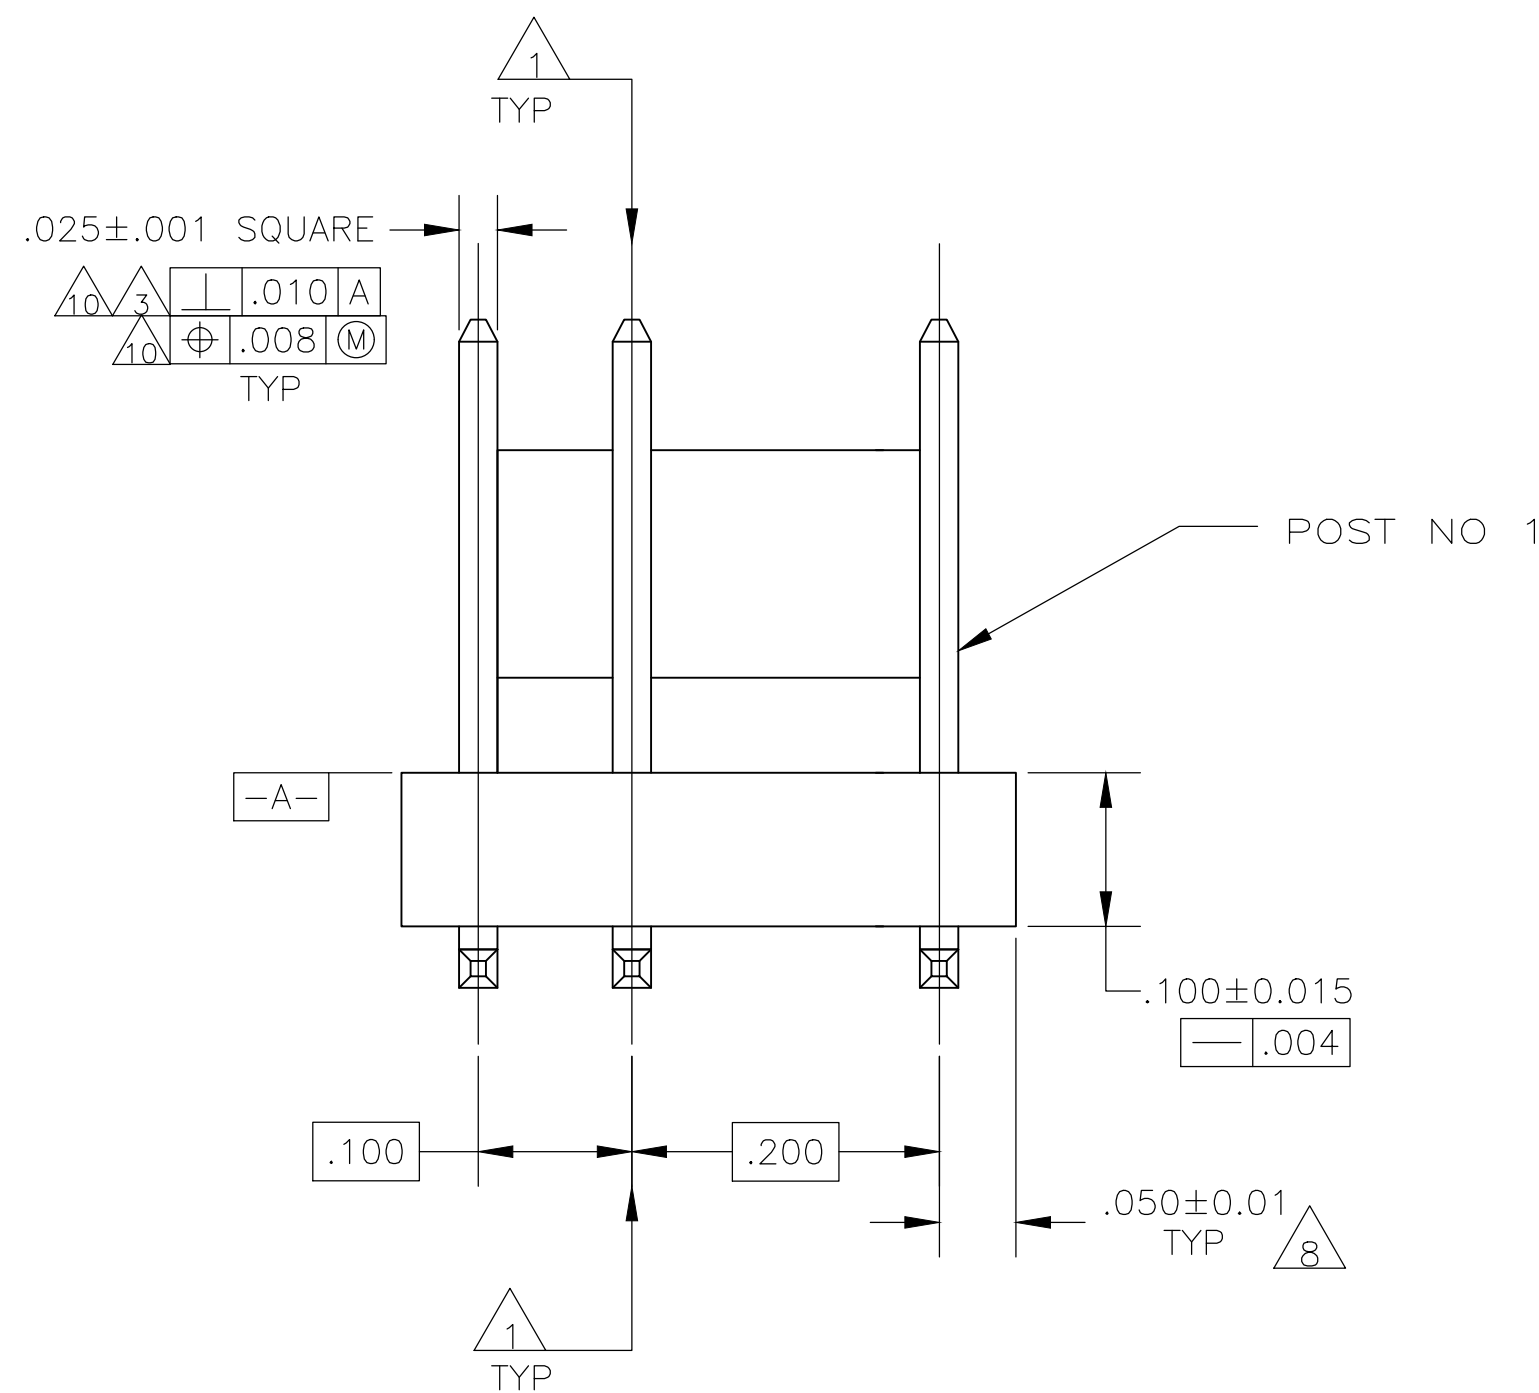
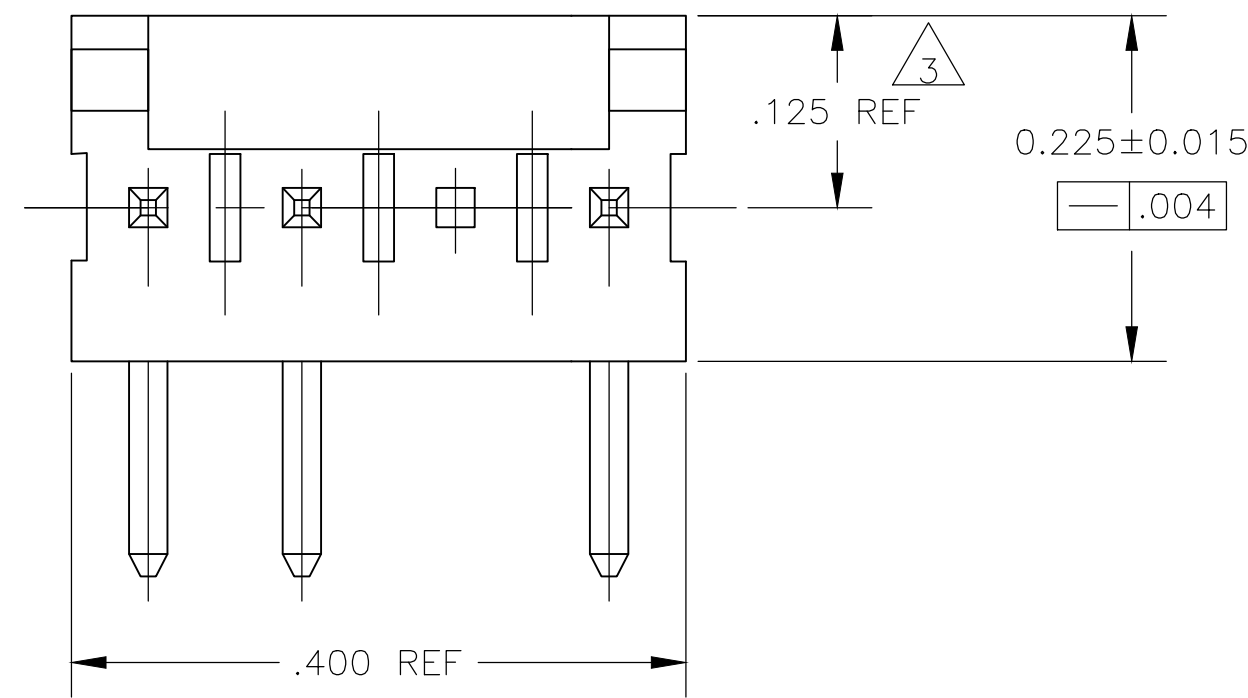


LOC	DIST	REVISIONS					
CM	54	P	LTR	DESCRIPTION	DATE	DWN	APVD
			K1	REVISED PER ECO-14-011424	23SEP14	MGM	CO



.040	1.02		
.035	0.89	.400	10.16
.032	0.81	.310	7.87
.025	0.64	.295	7.49
.020	0.51	.260	6.60
.015	0.38	.225	5.72
.010	0.25	.200	5.08
.008	0.20	.160	4.06
.005	0.13	.140	3.56
.004	0.10	.125	3.18
.001	0.03	.120	3.05
.000350	0.00889	.110	2.79
.000150	0.00381	.100	2.54
.000050	0.00127	.063	1.60
.000015	0.00038	.050	1.27
IN	MM	IN	MM

2	644034-1
POST NUMBER OMITTED	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. SMITH 23FEB93		 TE Connectivity	
DIMENSIONS: INCHES		DWN R. SWING 11MAR93		NAME MTA 100 HEADER ASSEMBLY, FRICTION LOCK, NOTCHED, .025 SQUARE RIGHT ANGLE POST, .000015 GOLD PLATED, 4 POSITION, OMITTED POST	
TOLERANCES UNLESS OTHERWISE SPECIFIED:  0 PLC ± . 1 PLC ± . 2 PLC ± . 3 PLC ± .005 4 PLC ± . ANGLES ± 0°30'		APVD B. SPEER PRODUCT SPEC — APPLICATION SPEC — —		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL FINISH		WEIGHT —		A1 00779 C-644034	
CUSTOMER DRAWING		SCALE R-1		SHEET 1 OF 1 REV K1	