

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,2006.

© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
J

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

A


RELEASED

10AUG06

T.T

Y.Y

-1:AS SHOWN(本図)

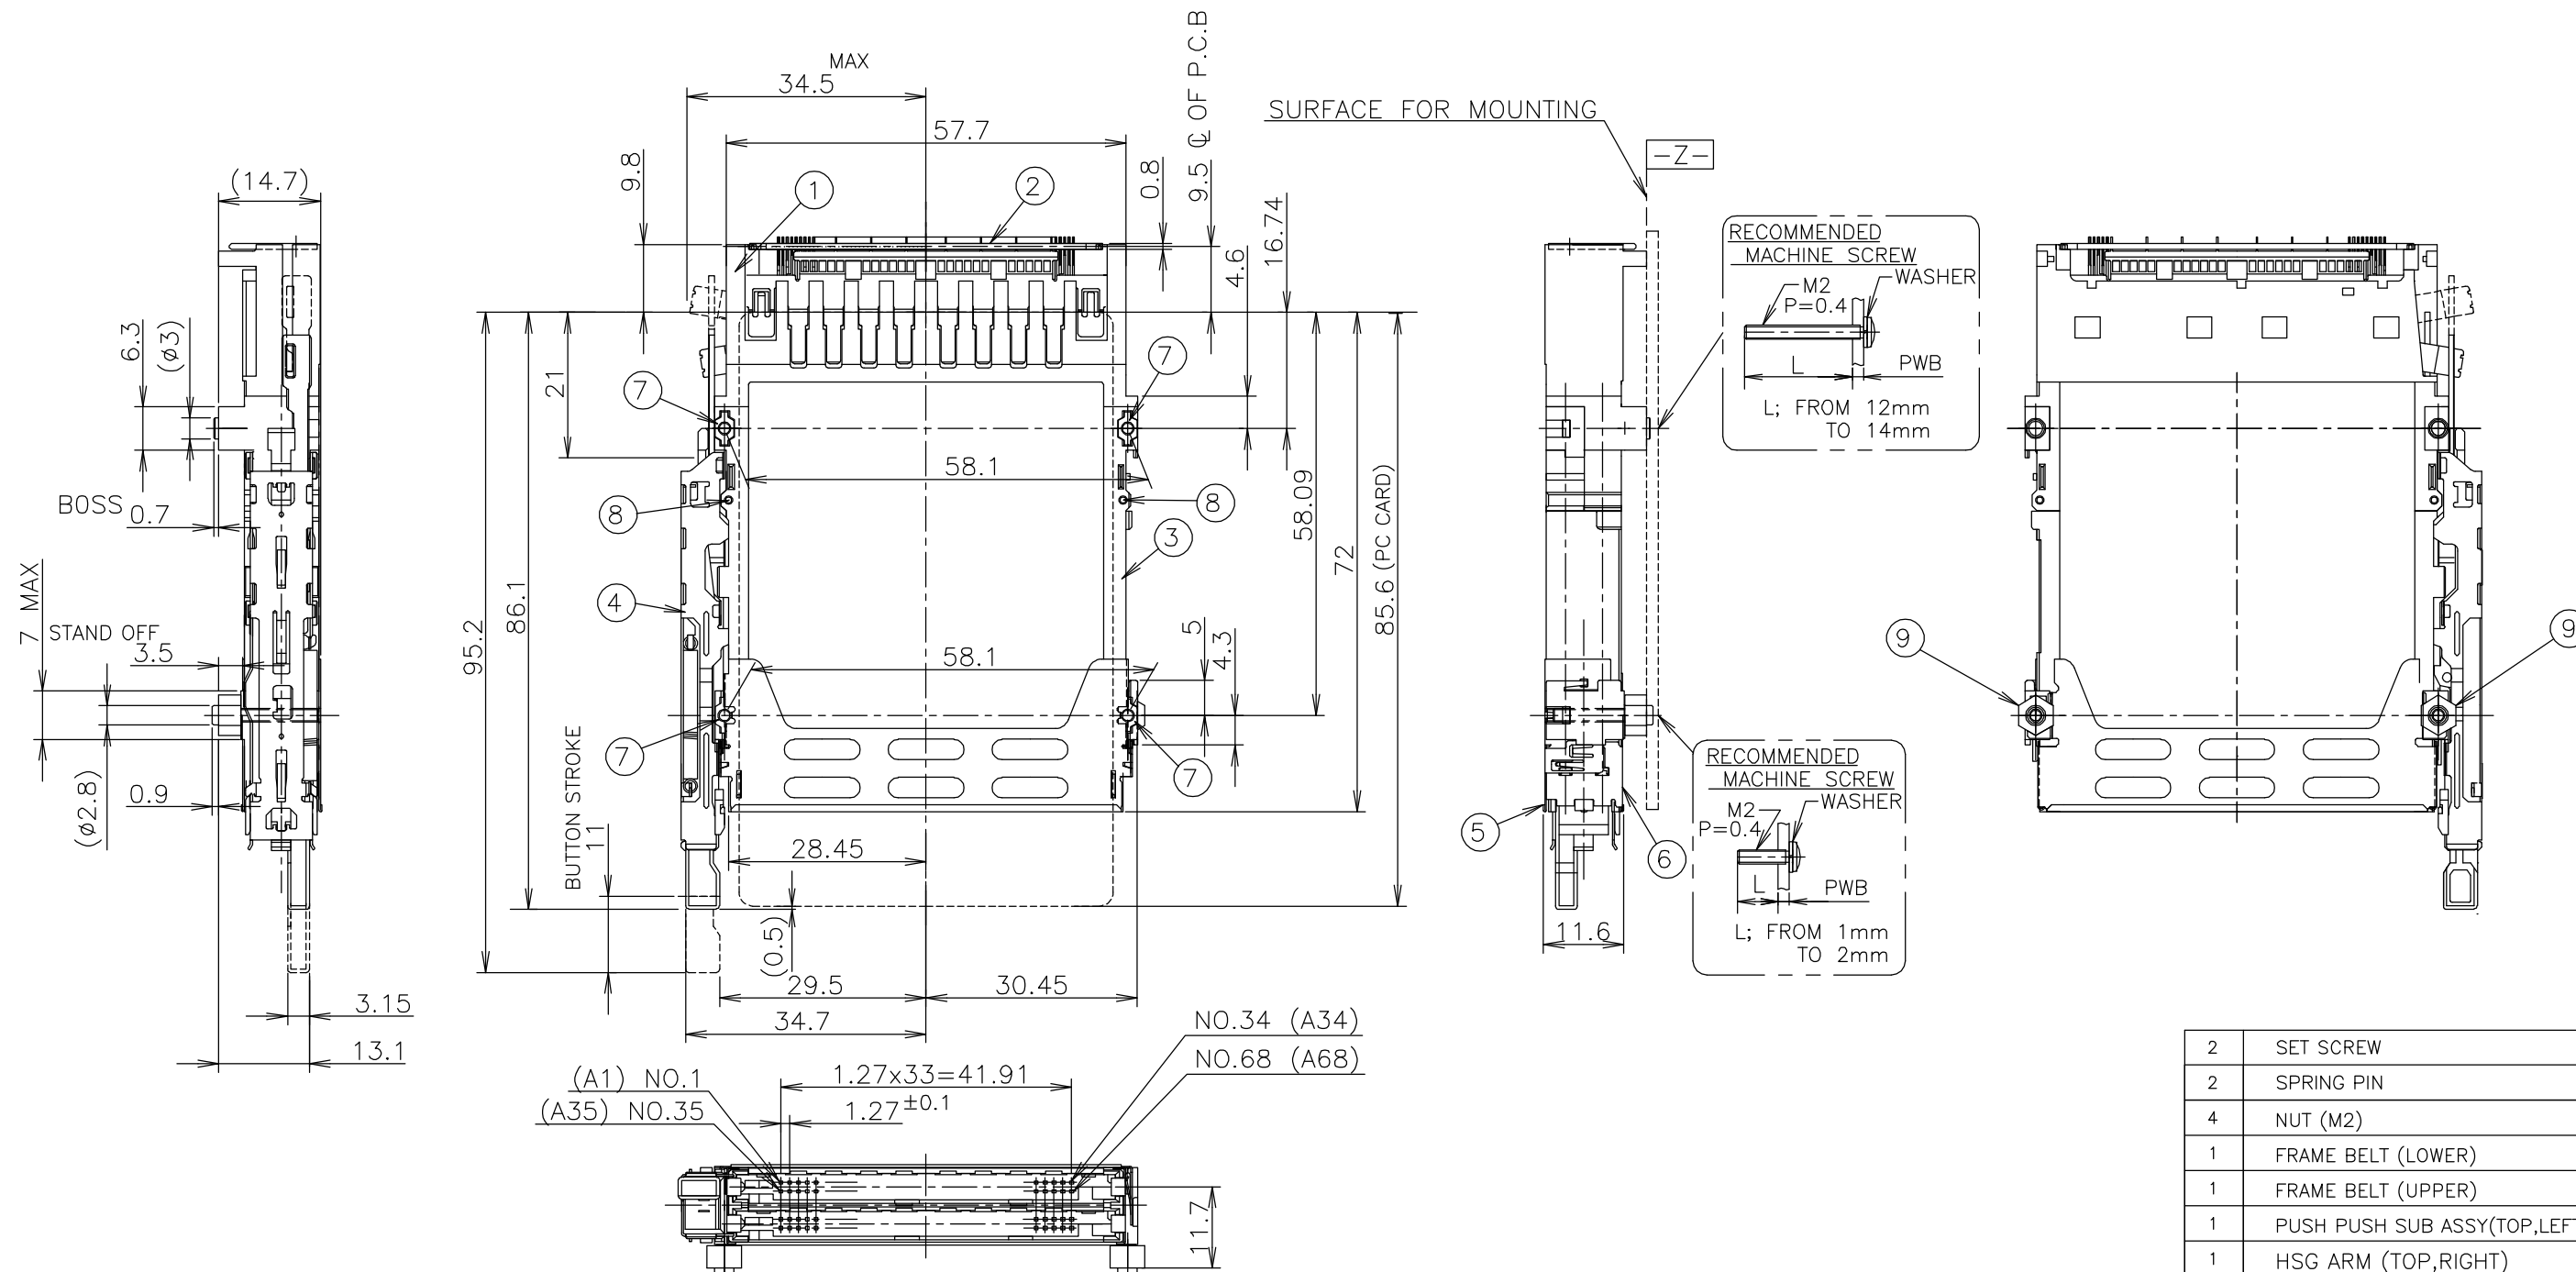

1. ポスト長は、表 1を参照のこと。
2. 推奨ネジ締め付けトルク: 0.15Nm(1.5kgcm)から0.2Nm(2kgcm)
3. 適応PCカード; PCMCIA準拠のPCカード

1. REFER TO TABLE 1 FOR POST CONTACT LENGTH.
2. RECOMMENDED TIGHTENING TORQUE
: FROM 0.15Nm(1.5kgcm) TO 0.2Nm(2kgcm)
3. APPLIED CARD: PCMCIA ATTRIBUTE PC CARD.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.TSUZAKI	10AUG06	tyco Electronics		Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位: 耗 mm		CHK T.FUTATSUGI	10AUG06			NAME 名称	
		APVD Y.YAMAMOTO	10AUG06	PRODUCT SPEC 製品規格		CARD BUS 3.5mmH DOUBLE SLOT TOP MOUNT PUSH-PUSH TYPE	
		APPLICATION SPEC 取付適用規格		SIZE		CAGE CODE	DRAWING NO 番号
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		WEIGHT		A3		00779	C-6565132
MATERIAL 材料		CUSTOMER DRAWING		SCALE 尺度		SHEET	REV
				1:1		1 OF 2	A

