

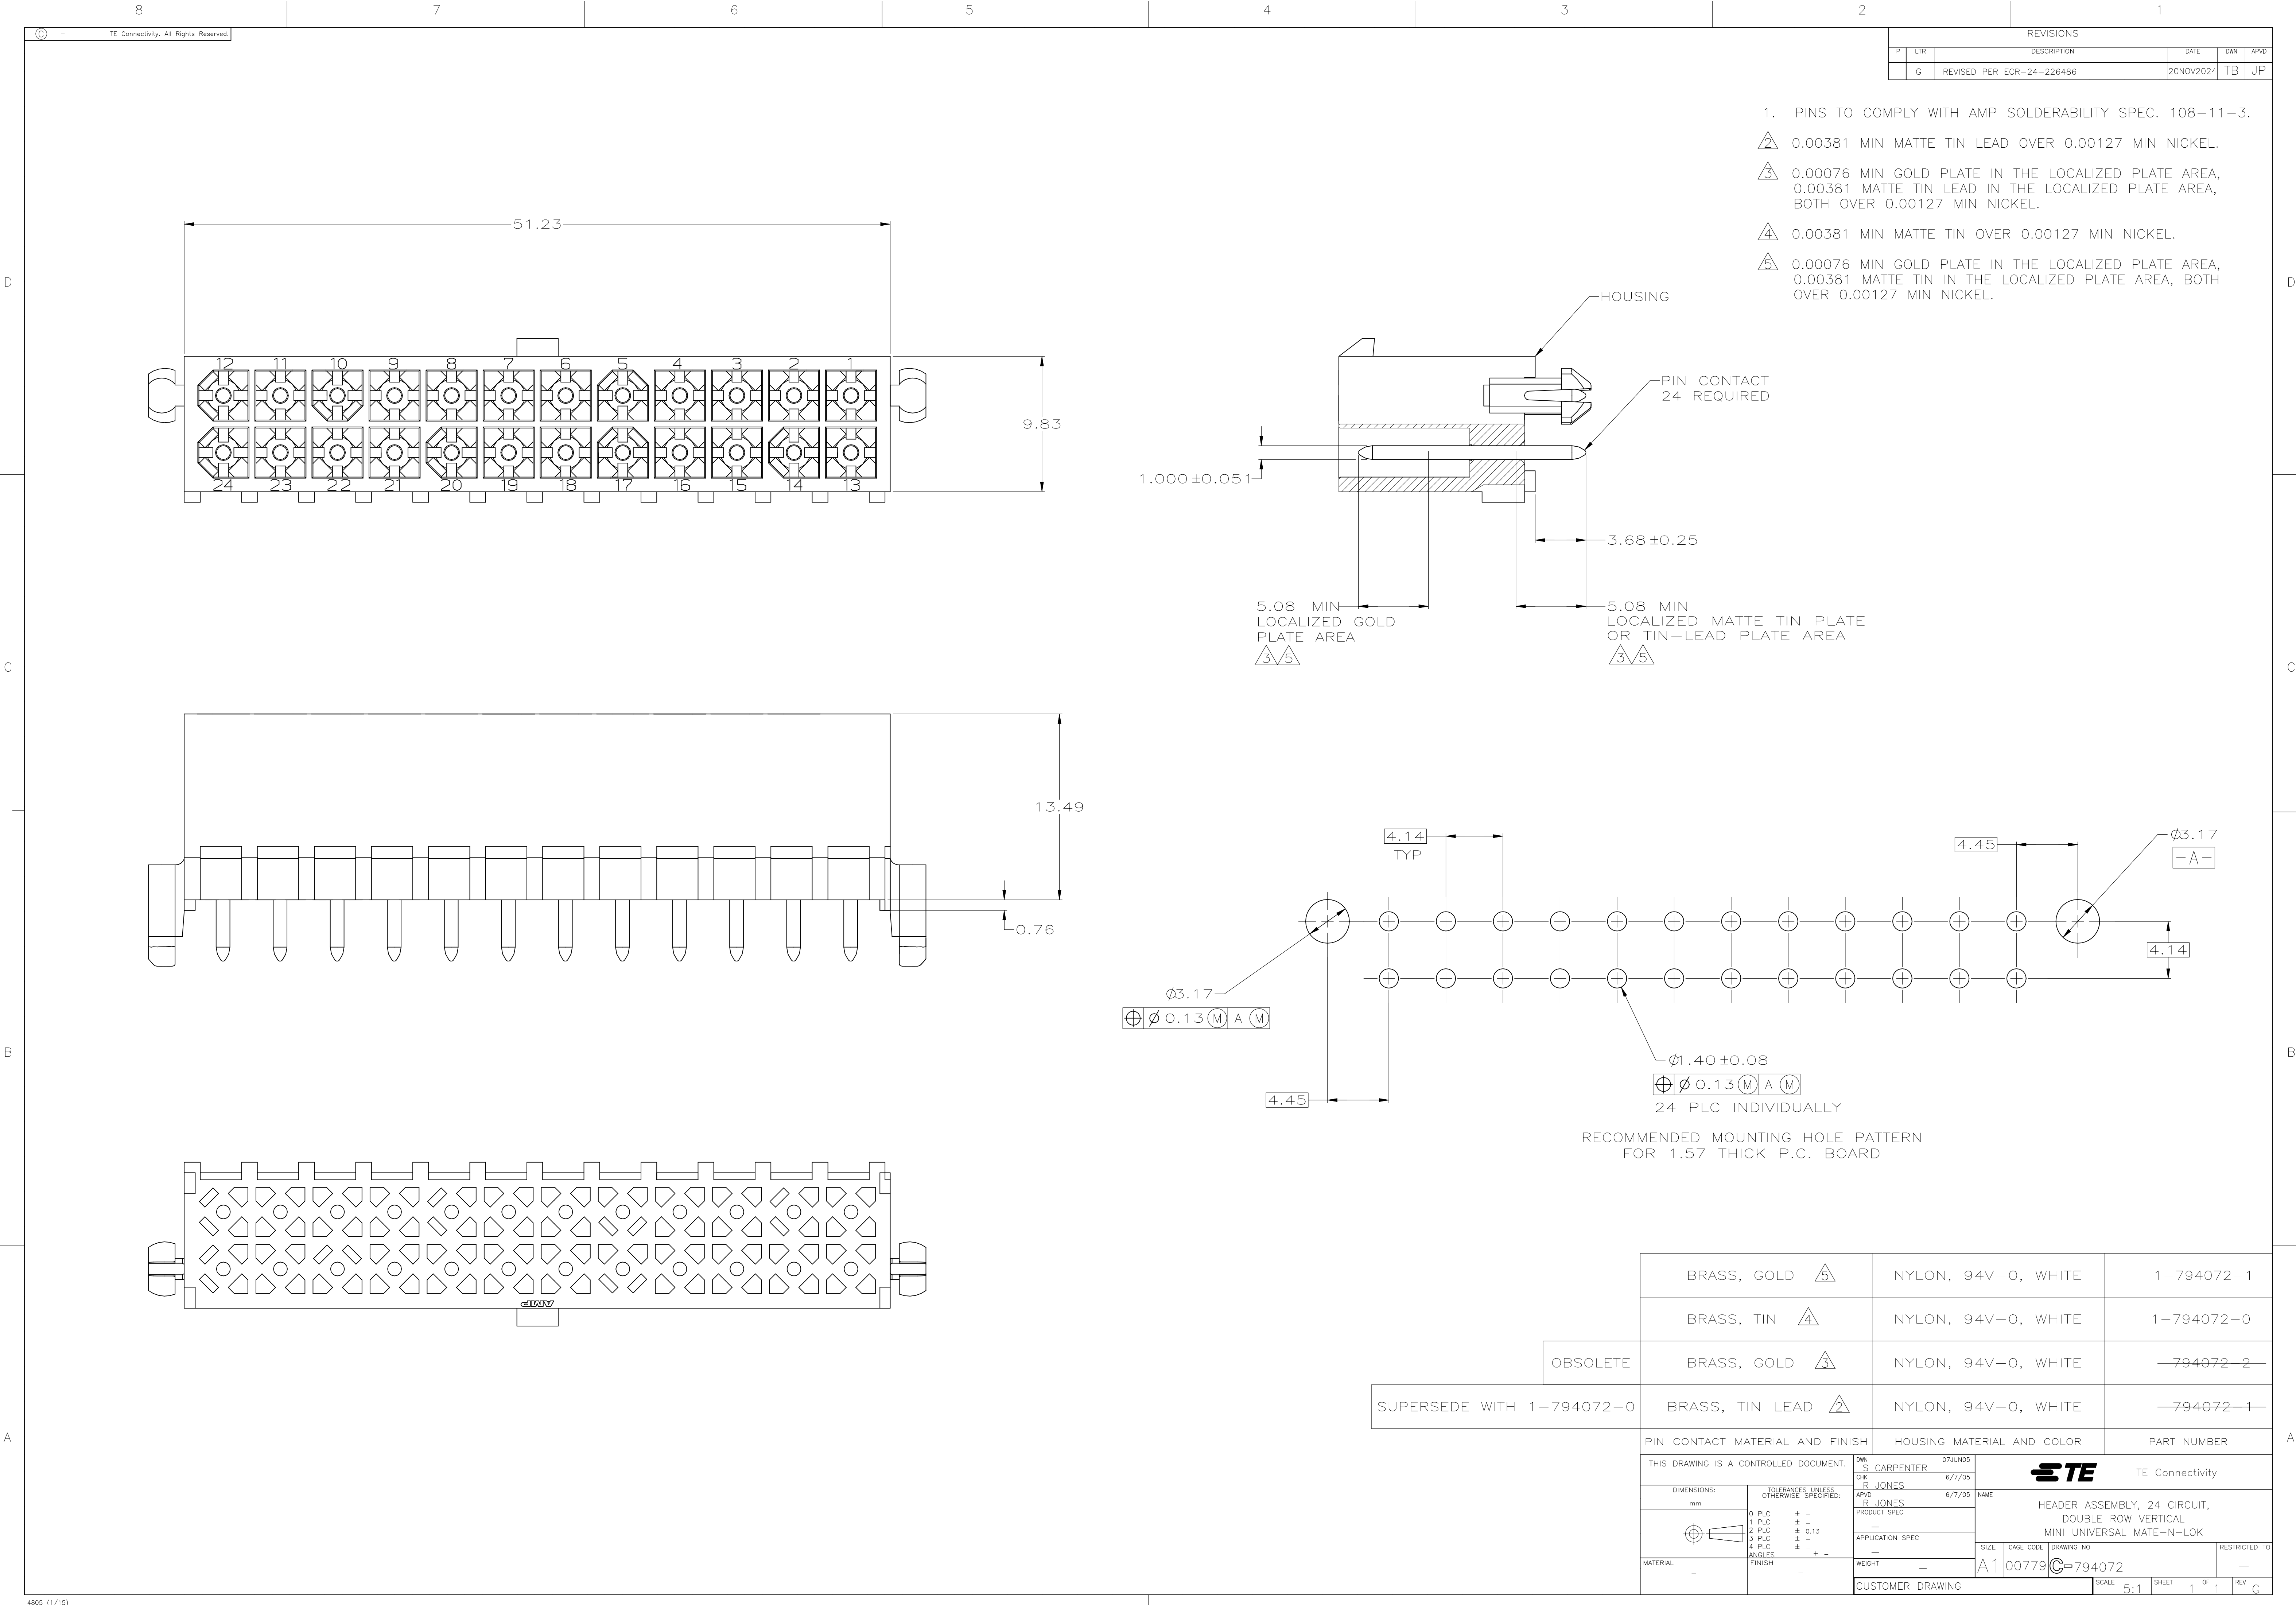


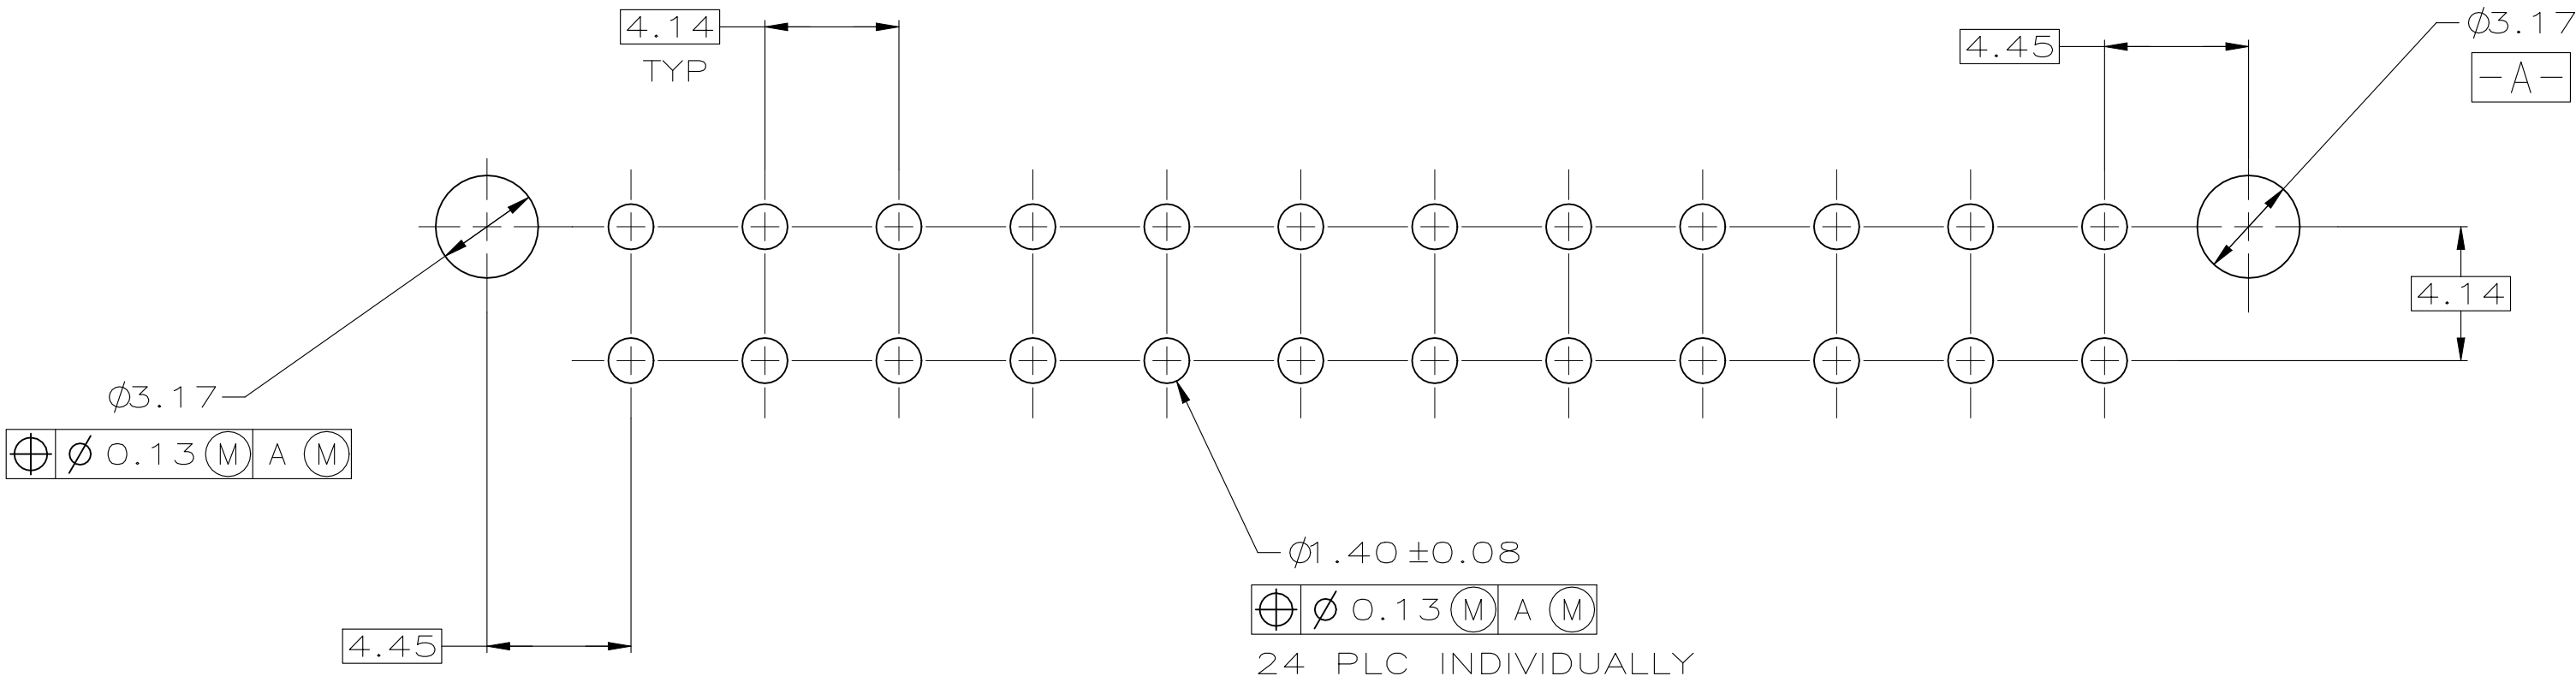

| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
| G         |     | REVISED PER ECR-24-226486 | 20NOV2024 | TB  | JP   |

1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
2. 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
3. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
4. 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
5. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

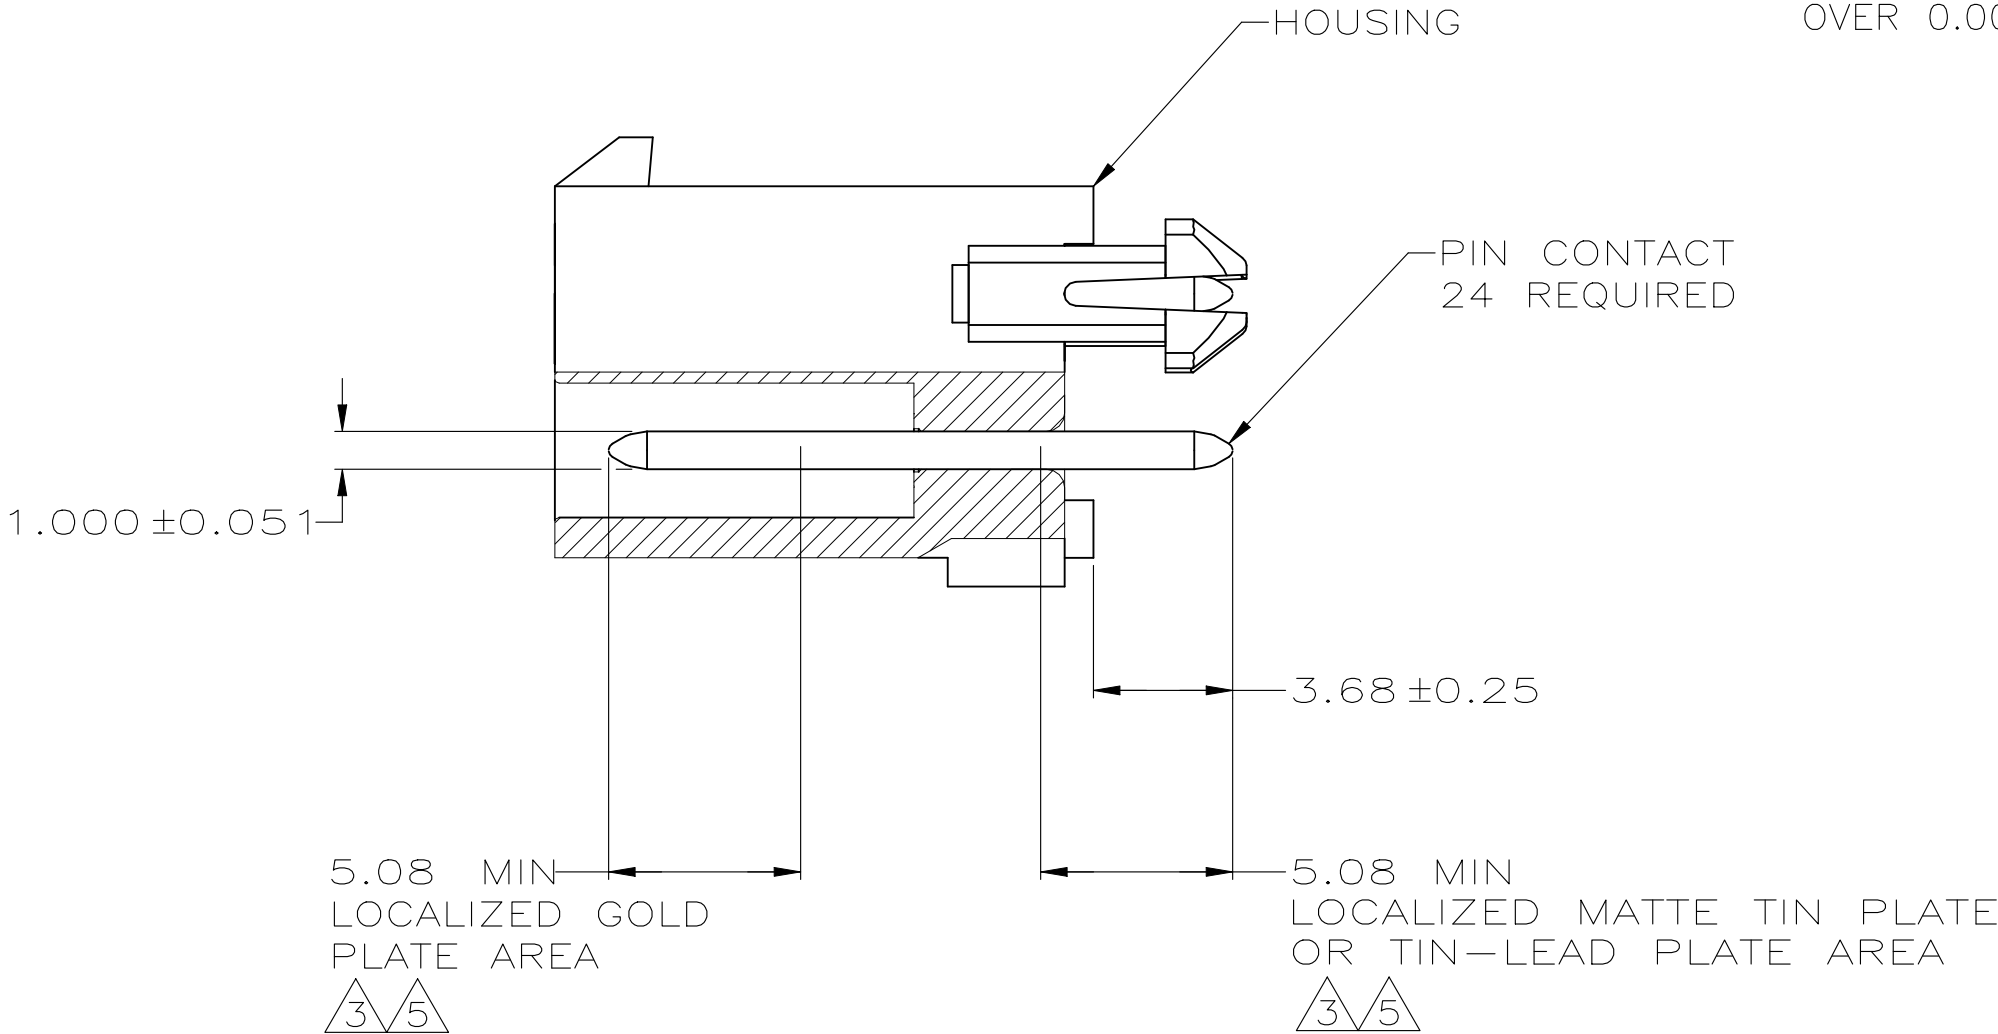

RECOMMENDED MOUNTING HOLE PATTERN  
FOR 1.57 THICK P.C. BOARD

|                                        |                   |                                                                                                                          |                                                                                                         |
|----------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| OBSOLETE                               | BRASS, GOLD 5     | NYLON, 94V-0, WHITE                                                                                                      | 1-794072-1                                                                                              |
|                                        | BRASS, TIN 4      | NYLON, 94V-0, WHITE                                                                                                      | 1-794072-0                                                                                              |
|                                        | BRASS, GOLD 3     | NYLON, 94V-0, WHITE                                                                                                      | -794072-2-                                                                                              |
| SUPERSEDE WITH 1-794072-0              | BRASS, TIN LEAD 2 | NYLON, 94V-0, WHITE                                                                                                      | -794072-1-                                                                                              |
| PIN CONTACT MATERIAL AND FINISH        |                   | HOUSING MATERIAL AND COLOR                                                                                               | PART NUMBER                                                                                             |
| THIS DRAWING IS A CONTROLLED DOCUMENT. |                   | DWN S CARPENTER 07JUN05<br>CHK R JONES 6/7/05                                                                            | TE Connectivity                                                                                         |
| DIMENSIONS:<br>mm                      |                   | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± 0.13<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± - | NAME<br>R JONES<br>PRODUCT SPEC<br>APPLICATION SPEC<br>SIZE<br>CAGE CODE<br>DRAWING NO<br>RESTRICTED TO |
| MATERIAL<br>-                          |                   | FINISH<br>-                                                                                                              | WEIGHT<br>-                                                                                             |
| CUSTOMER DRAWING                       |                   | SCALE 5:1                                                                                                                | SHEET 1 OF 1 REV G                                                                                      |