

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


D

C


B

A


2 POS.




4 POS.




6 POS.

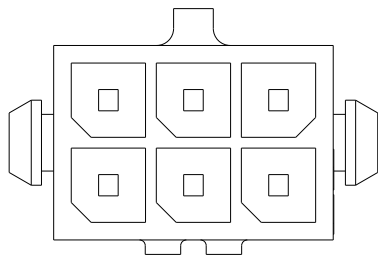


8 POS.

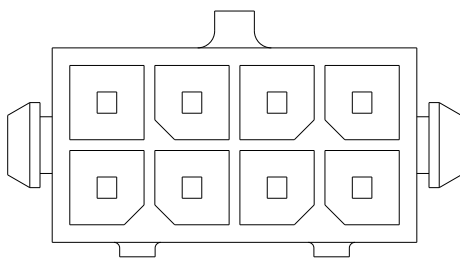


10 POS.

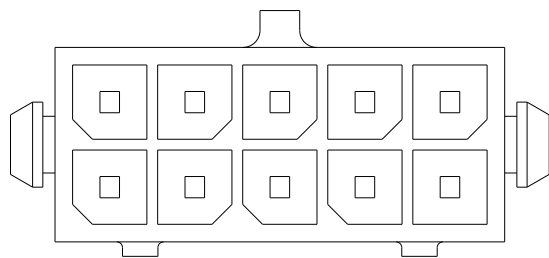


12 POS.

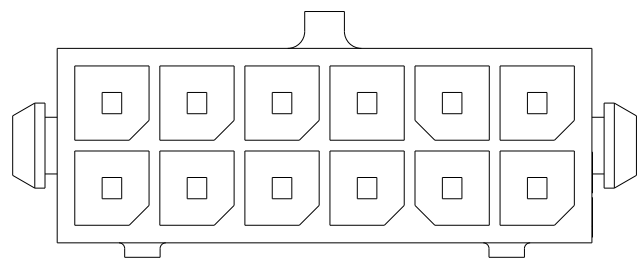


14 POS.

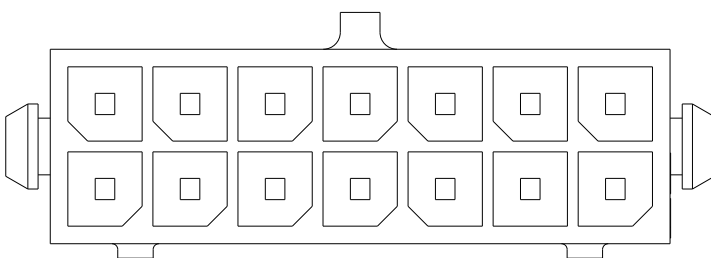


16 POS.

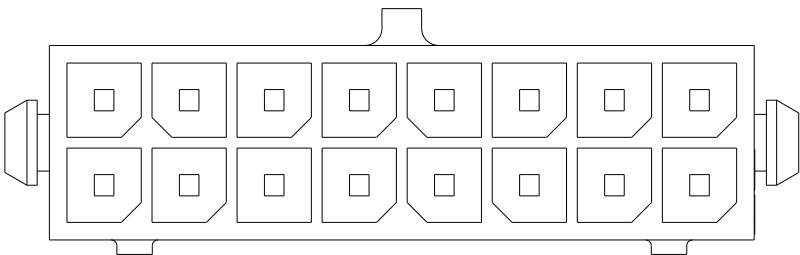


18 POS.

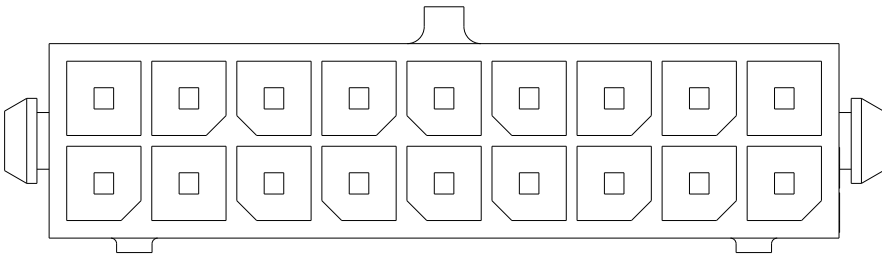


20 POS.

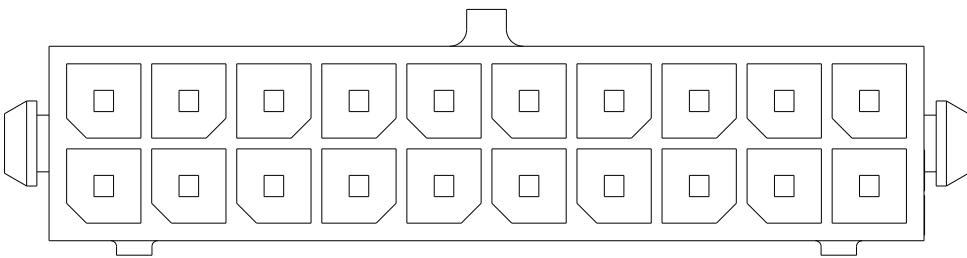


22 POS.

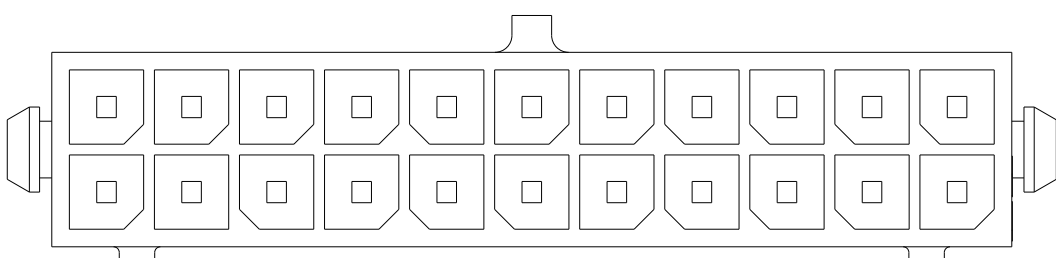

24 POS.

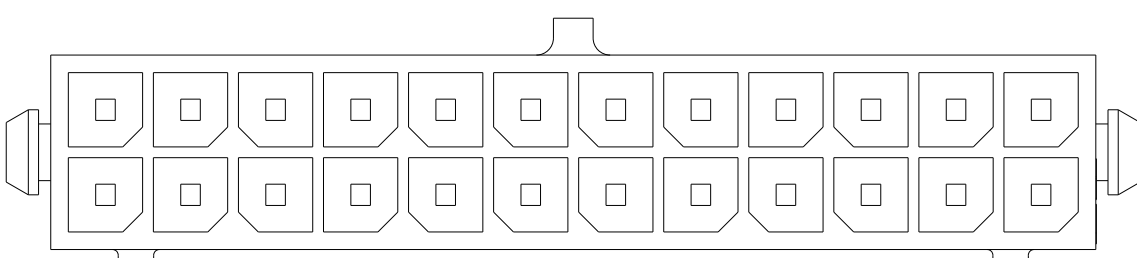

KEYING BY POSITION SIZE

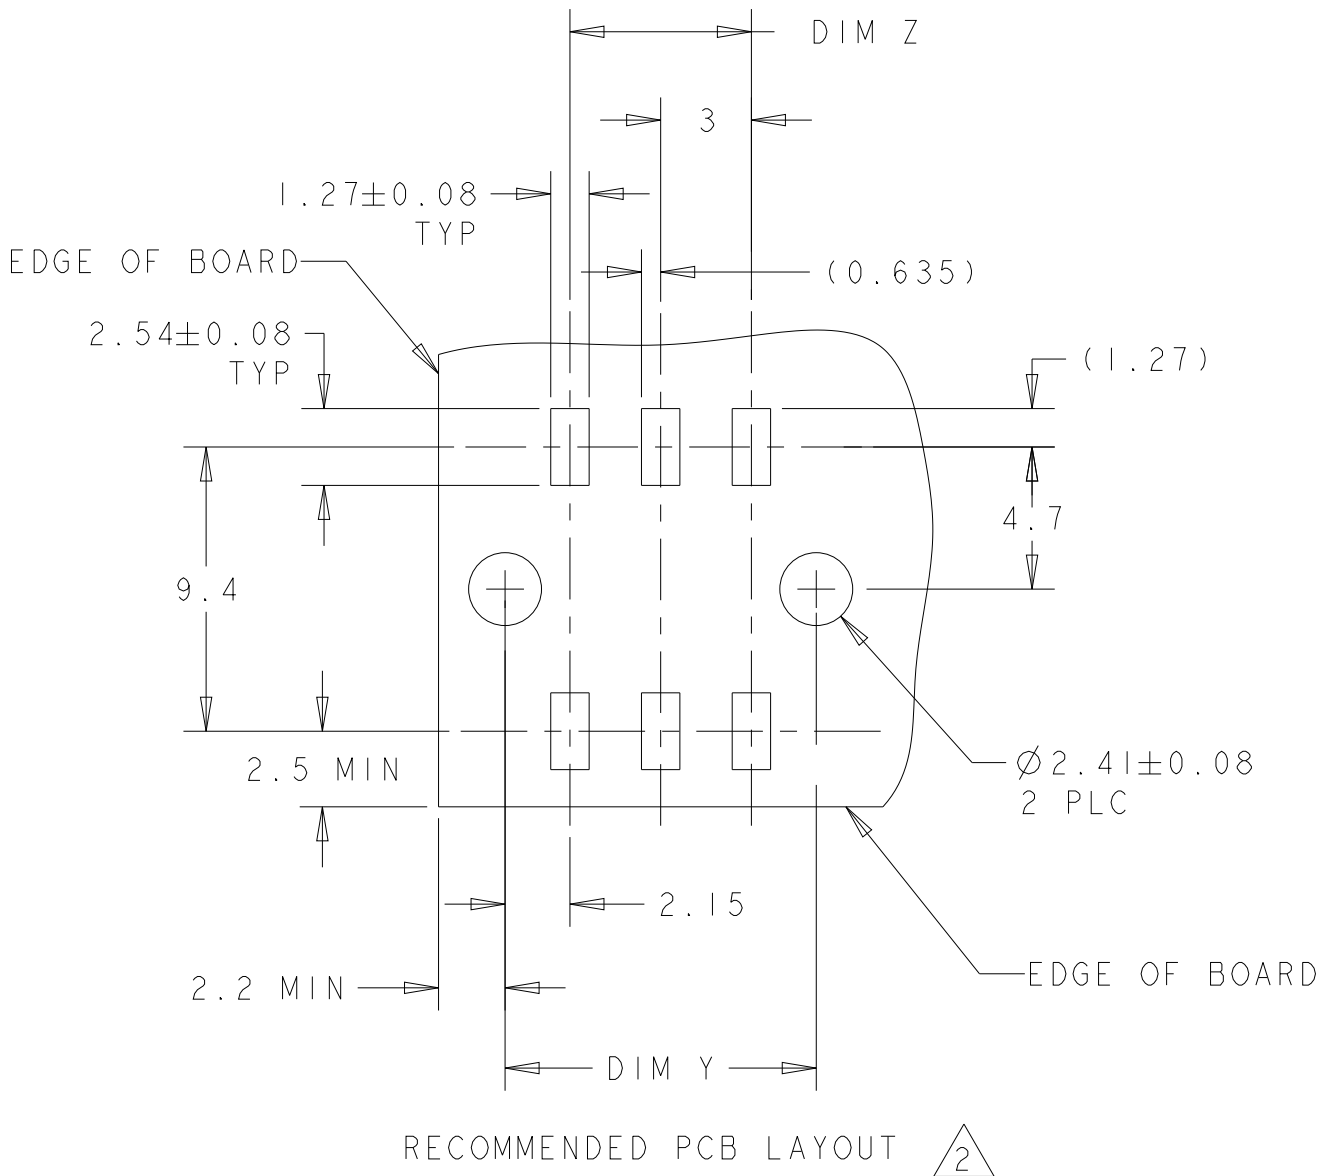

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19-MAR-2003 K. WHITAKER	TE Connectivity			
DIMENSIONS:		CHK 19-MAR-2003 C. JONES				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 19-MAR-2003 C. JONES	NAME SMT, VERTICAL, MECH. HOLDDOWN ASSY, 0.76Au or 0.69PdNi, HEADER, DUAL ROW, MICRO MATE-N-LOK(TM)			
	0 PLC ±	PRODUCT SPEC 108-1836	SIZE		DRAWING NO	
	1 PLC ±	APPLICATION SPEC 114-13000	CAGE CODE		RESTRICTED TO	
MATERIAL	2 PLC ±0.20	WEIGHT	A260779		C-794635	
	3 PLC ±	CUSTOMER DRAWING	SCALE 4:1		SHEET 2 OF 2	
	4 PLC ±				REV L	
	ANGLES ±1°					
	FINISH					