


LOC		DIST		REVISIONS					
P	LYR	DESCRIPTION			DATE	DWN	APVD		
	M	REVISED PER ECR-17-015775			03NOV2017	BDA	KR		
	MI	REVISED PER ECR-24-224610			10MAR2025	AK	BR		

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK[™] PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [.030 - .090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS INDICATED ARE REFERENCE. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
4. NOTE DELETED.
5. UL AND CSA LOGOS LOCATED APPROXIMATELY AS SHOWN

RECOMMENDED CUT OUT

Ø52.07±2.54
[2.050±.100]

R17.15
[.675]
2 PLC

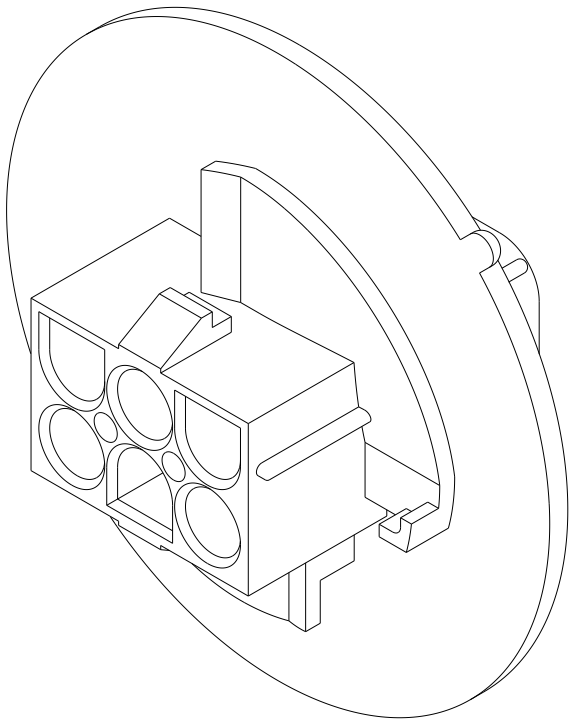

3-DIMENSIONAL MODEL
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
K. WHITAKER
06-OCT-1999

CHK
M. TRULL
06-OCT-1999

APVD
M. TRULL
06-OCT-1999

NAME

DIMENSIONS:
mm[INCHES]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±"

2 PLC ±0.51(.020)

3 PLC ±"

4 PLC ±"

ANGLES ±0° 30'

FINISH -

MATERIAL
NYLON
UL 94V-2, NATURAL

WEIGHT -

CUSTOMER DRAWING

SIZE
A1

CAGE CODE
00779

DRAWING NO
794714

SCALE
4:1

RESTRICTED TO
-

SHEET
1

OF
1

REV
M

TE Connectivity

CAP.
6 CIRCUIT,
UNIVERSAL MATE-N-LOK(TM), SPECIAL

SUPERSEDED BY 1586887-1	NATURAL	9-794714-0
	BLACK	1-794714-9
	GRAY	1-794714-8
	BLUE	1-794714-6
	GREEN	1-794714-5
OBSOLETE	YELLOW	1-794714-4
	ORANGE	1-794714-3
	RED	1-794714-2
	BROWN	1-794714-1
	RED	794714-3
SUPERSEDED BY 794714-3	NATURAL	794714-1
	COLOR	PART NUMBER