




5. APPLIED WIRE SEAL P/N:		
DESCRIPTION	SINGLE-WIRE SEAL (5mm Hole)	
Part NO.	828904	828905
INSULATION DIA.(φ)	1.2 ~ 2.1mm	2.2 ~ 3.0mm

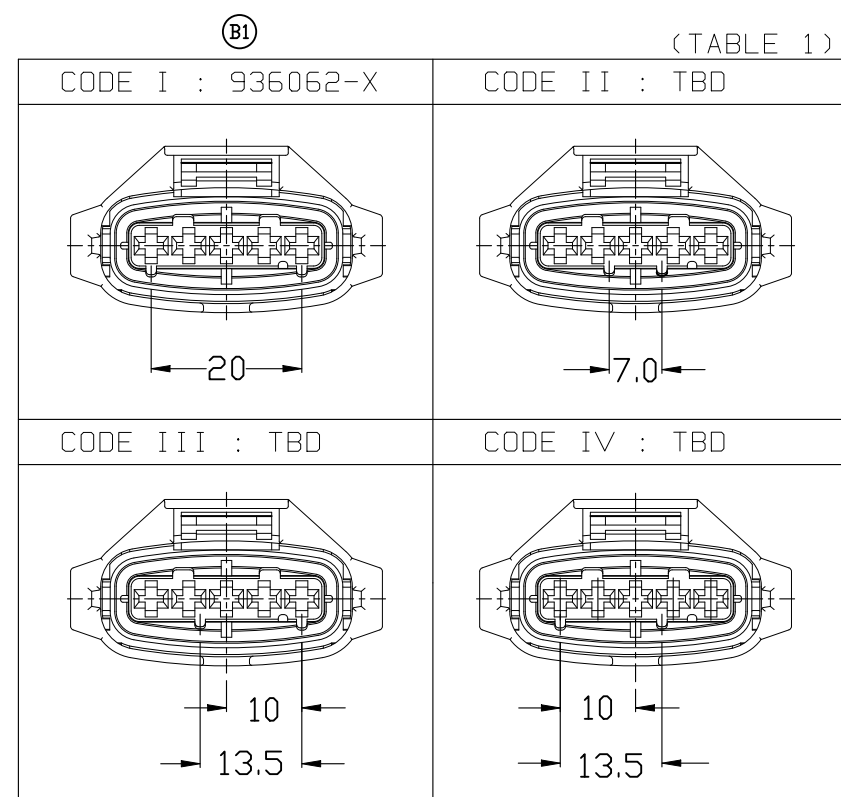


NOTE ;

① CODING IS AS FOLLOWS; SEE TABLE 1.

2. 0.15 MAX. WARPAGE AND 0.2 MAX. FLASH ARE PERMISSIBLE

3. SURFACE DEFECTS ARE NOT ACCEPTABLE AS FOLLOW:
SINK, WELD LINES, HAIRCRACKS, STAINS & SCORES

ASSEMBLY P/N	1	1	1	1	1	Ⓒ 936802-1	INNER SEAL	SILICON	RED BROWN	3						
	1					Ⓓ 936109-3	PROTECTOR HSG	PA 66 GF15	GRAY	2						
		1	1	1	1	936109-1	PROTECTOR HSG	PA 66 GF15	BLACK	2						
		1				TBD	PLUG HSG	PA 66 GF15	BLACK	1						
			1			TBD	PLUG HSG	PA 66 GF15	BLACK	1						
				1		TBD	PLUG HSG	PA 66 GF15	BLACK	1						
	1				1	936108-1	PLUG HSG	PA 66 GF15	BLACK	1						
Q'Y					P/N		DESCRIPTION		MATERIAL		COLOR	NO				
Ⓒ 936062-3	TBD	TBD	TBD	Ⓒ 936062-1	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING			DWN JM JEON		 TE connectivity						
								CHK JM JEON								
					DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD JW JUNG		NAME					
					 3rd ANGLE PROJECTION		0 <XX<10 ± 0.2		PRODUCT SPEC		2.8mm SEALED 5P PLUG ASSEMBLY					
							10<XX<30 ± 0.25		-----							
MATERIAL		FINISH		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO						
SEE TABLE		-----		114-18144		A2		00779		G- 936062						
								CUSTOMER DRAWING				SCALE 2/1		SHEET 1	OF 1	REV D1