
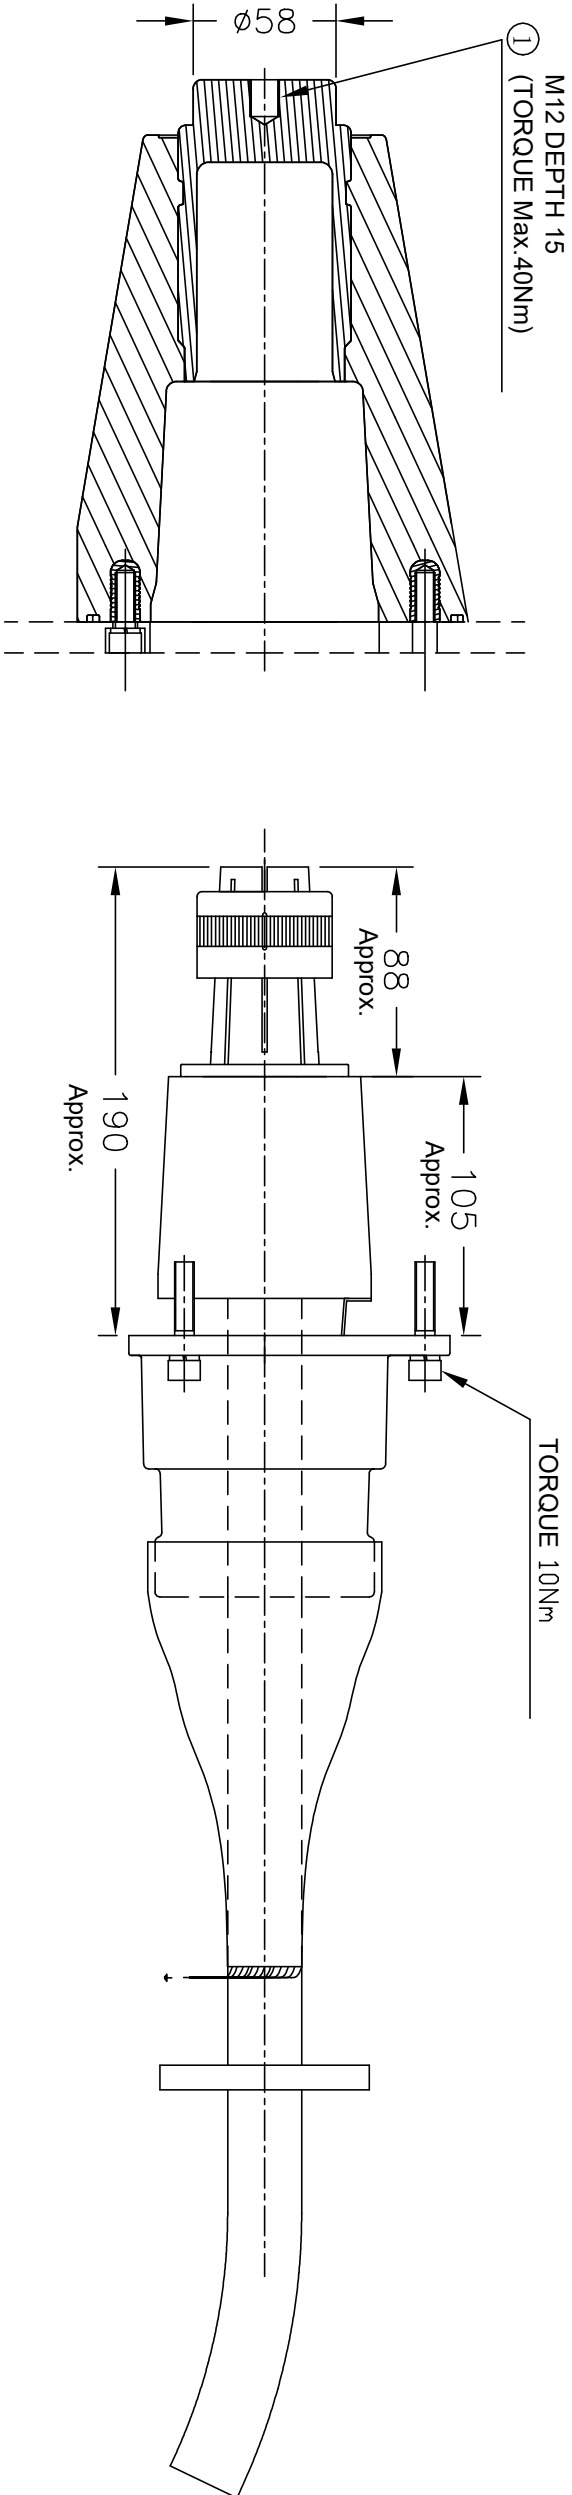


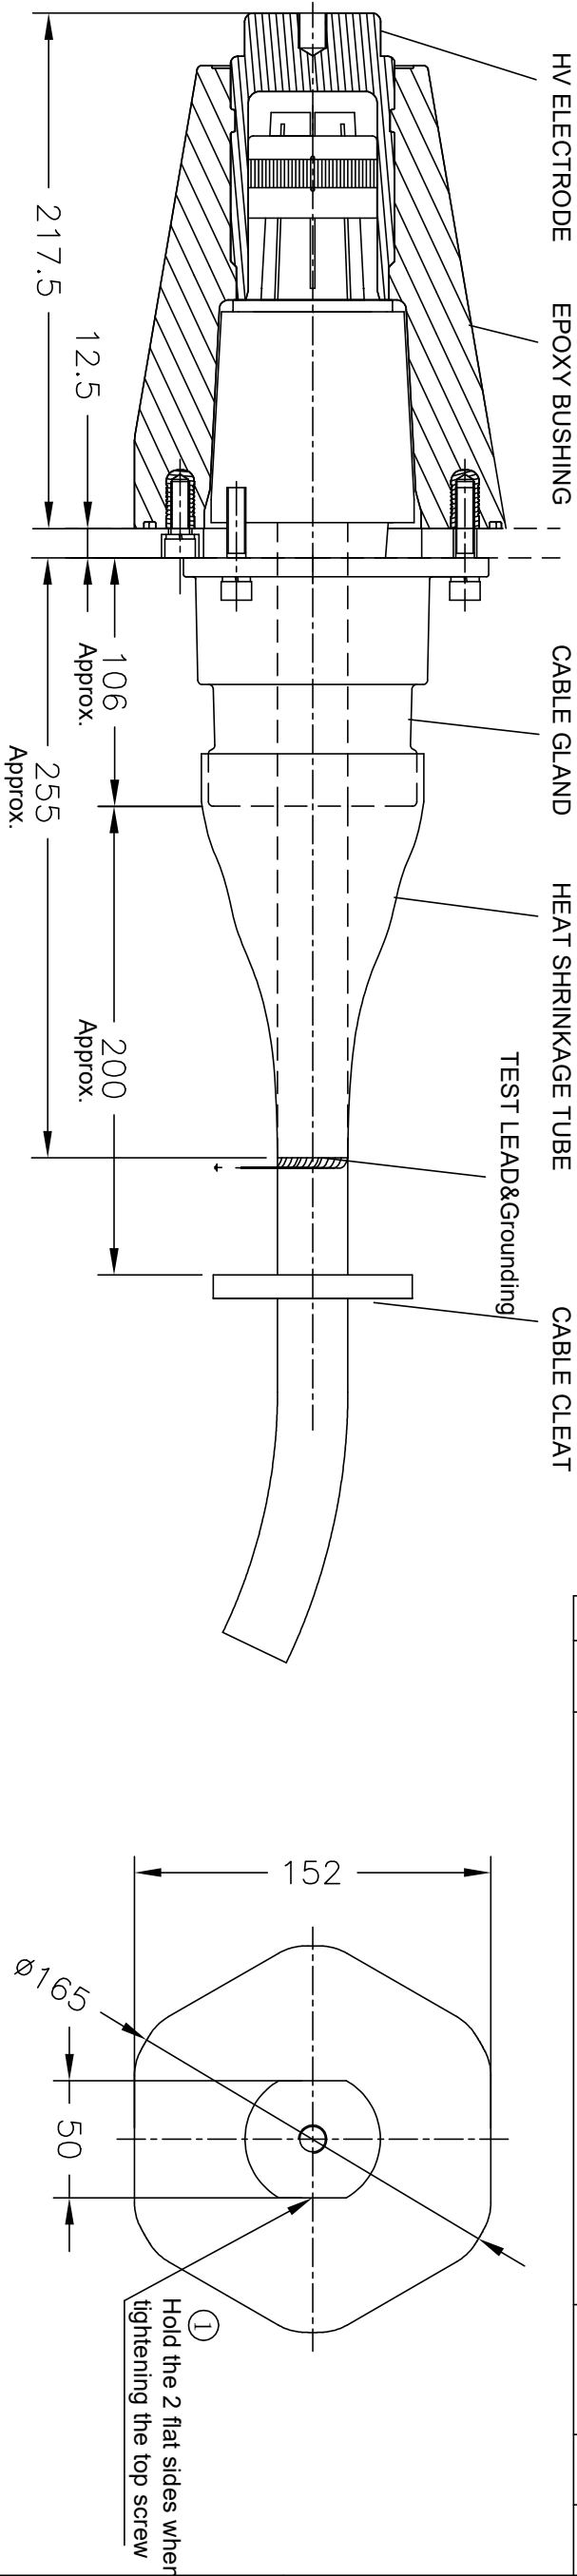

TECHNICAL DATA	
MAX. VOLTAGE Um(kv)	42
AC Withstand(kv)	117
LIGHTING IMPULSE VOLTAGE(kv)	200
MAX. INSULATION DIA. (mm)	55
THERMAL SC	35kA/5s
DYNAMIC SC	125kA
Rated current(A)	Max.1250
WEIGHT(kg)	2.5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
WILLIAM XU

CHK
JANE WU

APVD
RICK YAO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

NAME

RPIT INNER CONE PLUG-IN TERMINATION SIZE 3

TE

TE Connectivity Ltd.

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

CUSTOMER DRAWING

SCALE

SHEET

REV