




PROPERTY OF DEUTSCH E. & D.

This drawing contains proprietary information that shall not be disclosed, duplicated, nor used in whole or in part for any purpose other than to evaluate this drawing.

A CTJ420E044

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED AND REDRAWN PER E.O. C1013	11-22-44	JP

INDEX (REF.)

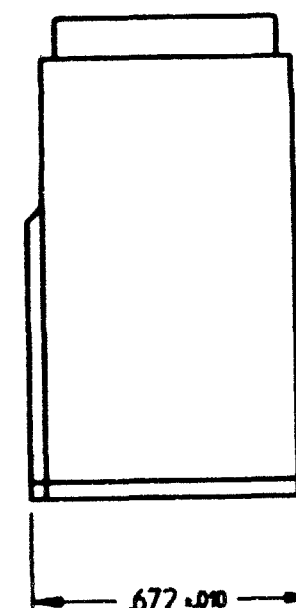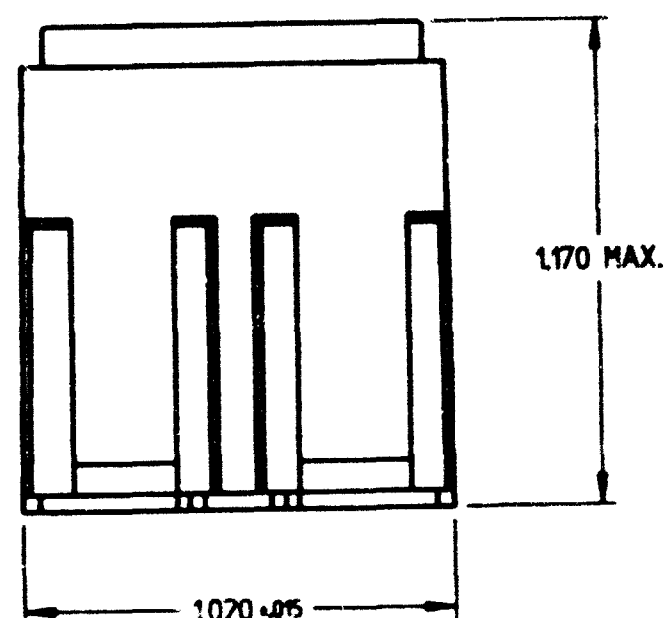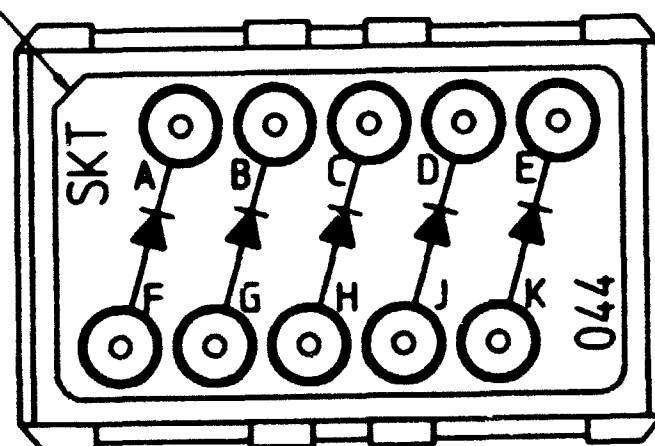

11. ELECTRONIC COMPONENTS FIVE (5) JANIX IN5552 DIODES
PRV - 600V
VFM - 1.2V
IF - 9.0 Adc
trr - 2.0u SEC

10. THIS ASSEMBLY CONFORMS TO MIL-C-81714, SERIES B.

9. SOCKET CONTACTS MEET MIL-C-37029/22-192 REQUIREMENTS.

8. JUNCTION ELECTRONIC COMPONENT TEMPERATURE RANGE
-67°F TO +257°F (-55°C TO 125°C).

7. MATERIAL AND FINISHES HOUSING - THERMOPLASTIC
GROMMET - SILICONE ELASTOMER
PIN CONTACTS - COPPER ALLOY PLATED GOLD.

6. CONTACT INSERTION/REMOVAL TOOL NUMBER M89169/14-10 IS REQUIRED.

5. SEE ENVELOPE DRAWINGS CTJ-3a-00 AND DCR-1a-00 FOR SUITABLE RAIL ASSEMBLIES.

4. SEE ENVELOPE DRAWING 1625-1-0000 FOR CONTACT DATA.

3. CTJ420EXXX-000
MODIFICATION
CIRCUIT ARRANGEMENT
BASIC IDENTIFIER

2. THE CIRCUIT IDENTIFICATION WILL BE SCREENED ON JUNCTION.

1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

SIGNATURE & DATE	
DR	LASHWAY 10-3-80
CHK	L. STOLLE 10-30-80
PR	MAC DONALD 10-27-80
APPC	
SCALE	1"

JUNCTION ASSEMBLY
ELECTRONIC COMPONENT
SIZE 12
SIZE 20 CONTACTS
044 ARRANGEMENT
ENVELOPE

CP	DEUTSCH ENGINEERED CONNECTING DEVICES 36033 Whittier Ave. Hawthorne, California
A	CTJ420E044
DATE	11-22-44
SHEET	1 OF 1

CTJ420E044, 80V