
CUSTOMER DRAWING

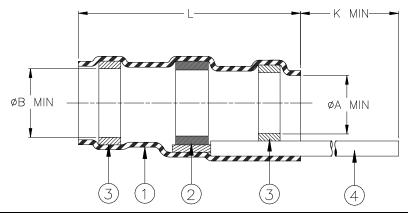

Product Name		Product D	imensions	Cable Dimensions			
	L ±0.8	øΑ	øΒ	K	øD	øΕ	J ±0.5
	(0.031)	min	min	min	max	min	$(J \pm 0.02)$
D-146-50-X*	15.00	2.80	3.20	150	2.80	0.90	7.00
	(0.591)	(0.106)	(0.125)	(5.910)	(0.106)	(0.035)	(0.275)
D-146-60-X*	15.00	4.60	5.10	150	4.60	1.80	7.00
	(0.591)	(0.181)	(0.200)	(5.910)	(0.181)	(0.070)	(0.275)
D-146-70-X*	15.00	7.10	7.60	150	7.10	3.60	7.00
	(0.591)	(0.280)	(0.300)	(5.910)	(0.280)	(0.142)	(0.275)

^{*} X indicates the color of ground lead. See below.

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI-J-STD-006.

FLUX: TYPE ROL0 per ANSI-J-STD-004.


- 3. MELTABLE RINGS: Thermally stabilized thermoplastic. Color: blue.
- 4. GROUND LEAD: Raychem 55A0811-22 in accordance with MIL-W-22759/34 AWG 22 stranded tin plated copper. Color: see below.

APPLICATION

- 1. These parts are designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silverplated copper shields.
- 2. Temperature range: -55°C to +150°C.

Install using TE Connectivity-approved convection or infrared heating tools in accordance with Raychem process standard RCPS-100-70.

For best results, prepare the cable as shown:



0 – white, 4 – green, 1 – orange, 5 – yellow, 2 – brown, 6 – blue,

3 - purple, 7 - red

Color:

Raychem THERMOFIT DEVICES			THERMOFIT	SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]					D-146-X0-X			
TOLERANCES: 0.00 N/A	ANGLI	ES: N/A	amend this drawing at any time. NESS IN Users should evaluate the suitability		REV:	DATE:		
0.0 N/A 0 N/A	ROUG! MICRO	HNESS IN ON			3		9-Mar-2020	
DRAWN BY: DATE: M. FORONDA 24-Nov-19		ECO: ECO-20-003687		SCALE: NTS	SIZE:	SHEET: 1 of 1		

© 09-Mar-2020 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

^{*}TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks