

2019

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.


ALL RIGHTS RESERVED.

BY TE CONNECTIVITY

COPYRIGHT 2016



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-			A	NEW RELEASE	04OCT2016	JA	DM
			A1	REVISED PER PCN E-19-009112	10JUN2019	JA	IG
			A2	REVISED PER PCN-23-181233	06JUL2023	RK	IG

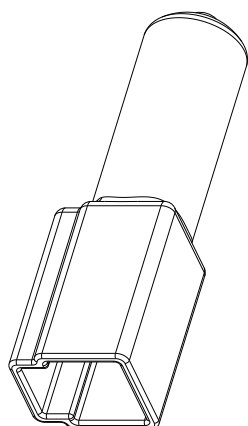

SCALE 1:1

 $(\varnothing 11.10)$
 $[.437]$

A

(9.96)
 $[.392]$


(12.70)
 $[.500]$

(4.19)
 $[.165]$

A

14.61
 $[.575]$

$1.52 \pm .25$
 $[.060 \pm .010]$
 MEASURED 6.35 ± 0.64
 $[.250 \pm .025]$
 FROM OPEN END

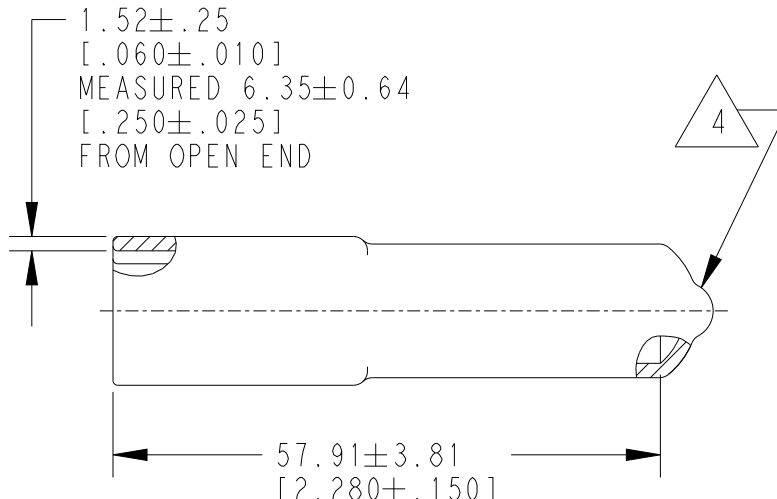**SECTION A-A**

4 SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND.

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION

2. TEMPERATURE RATING: -29°C TO $+100^{\circ}\text{C}$ [-20°F TO $+212^{\circ}\text{F}$]

1. THIS PART IS USED ON DT06-2S PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT2S-BT-BK	DT2S-BT-BK

DIMENSIONS: MM [INCHES]		DWN J.APOSTOL	04OCT2016	MATERIAL PVC		FINISH BLACK		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±.064 [.025] 3 PLC ± 4 PLC ± ANGLES ±0°30'0"		CHK D.MEYER	04OCT2016	TE Connectivity				
		APVD D.MEYER	04OCT2016					
		PRODUCT SPEC		NAME BOOT, PLUG, 2 PIN DT SERIES				
		APPLICATION SPEC						
		114-151009		SIZE A 4	CAGE CODE 4AFU8	DRAWING NO C-DT2S-BT-BK	RESTRICTED TO -	
		WEIGHT 4.57 g						
CUSTOMER DRAWING				SCALE 5:4		SHEET 1	OF 1	REV A2