
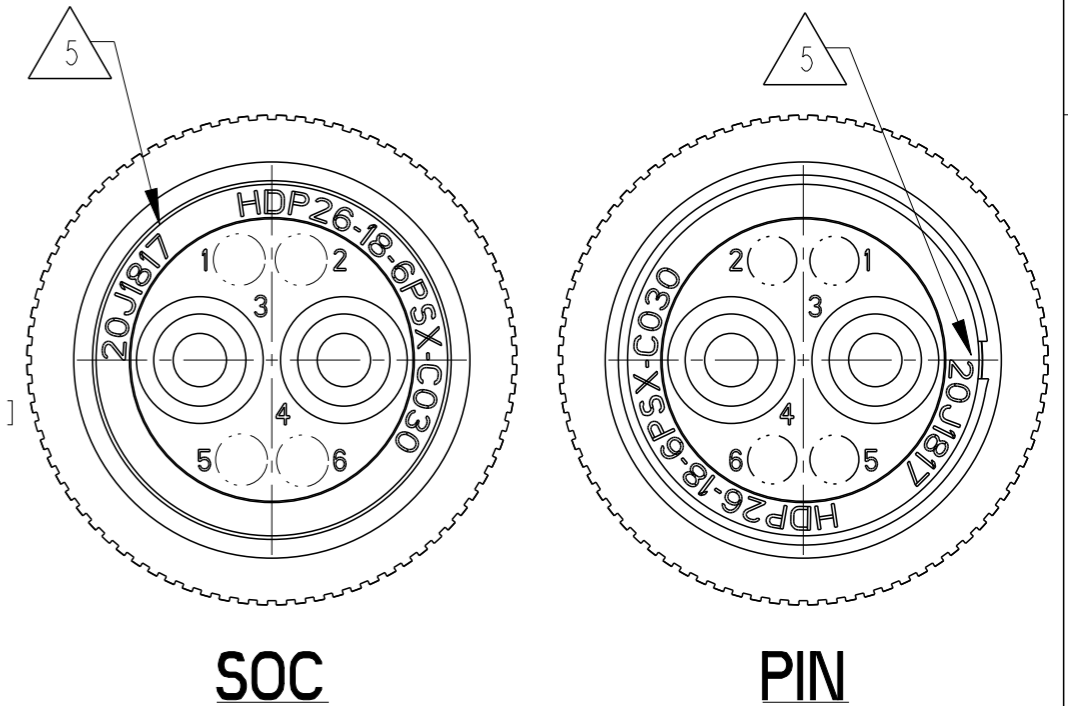


P	LTR	DESCRIPTION	DATE	DWN	APVD
NC		NEW RELEASE PER E.O. P19153	03JAN2006	-	RDR
A		REVISED PER E.O. P20618	26OCT2010	-	RDR
A1		REVISED PER PCN E-20-013840	18SEP2020	MK	IG
A2		REVISED PER PCN E-20-017587	10MAR2021	CO	IG

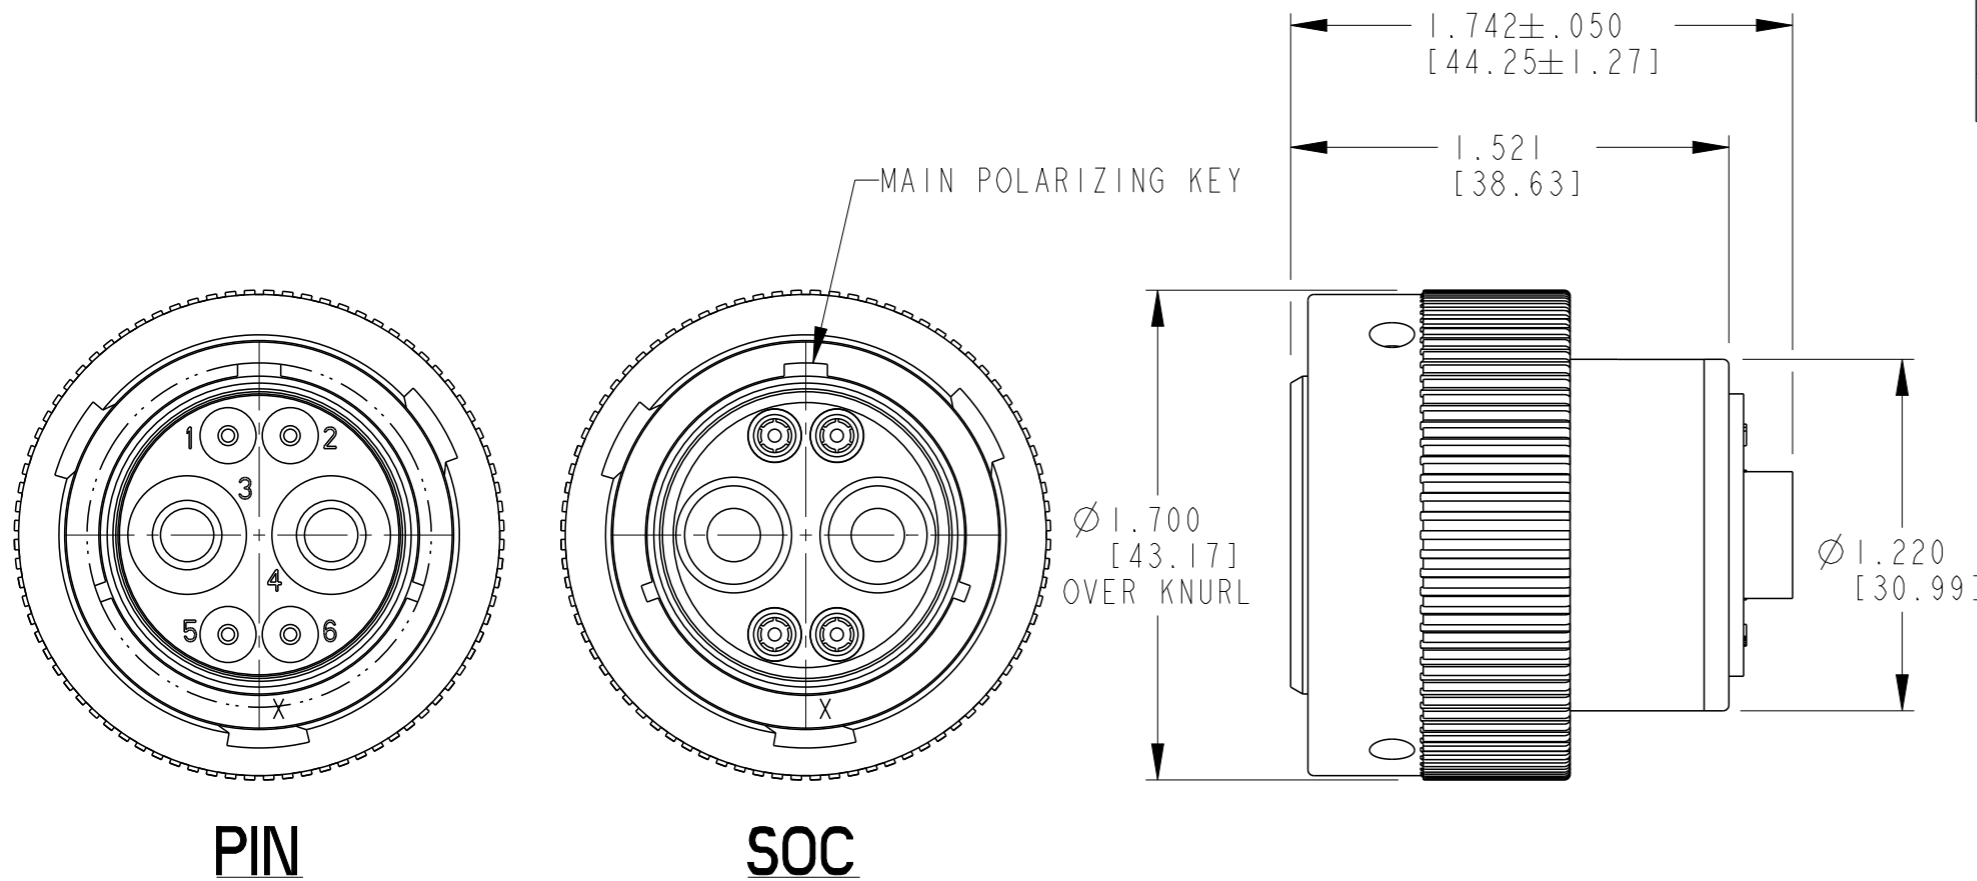

5. DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
 YEAR: FIRST AND SECOND DIGITS. (14=2014)
 MONTH: THIRD DIGIT, EXCLUDING I.A=JAN., B=FEB., C=MARCH...(K=OCT.)
 DAY: FOURTH AND FIFTH DIGIT (14=14th DAY)
 HOUR: SIXTH AND SEVENTH DIGIT (11=11AM)

4. THIS PART MATES WITH HDP24-18-6P/S*-C030. * = TYPE OF SEAL.

3. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DWG. 0425-015-0000 AND 0425-021-0000.


2. THIS CONNECTOR WILL ACCOMMODATE THE FOLLOWING WIRE INSULATION DIAMETERS.

SEAL TYPE	CONTACT SIZE	MIN O.D.	MAX O.D.	3. WIRE GAUGE AWG [mm ²] RANGE
N	4	.280 [7.11]	.292 [7.42]	6 [13]
E	4	.261 [6.63]	.292 [7.42]	6 [13]

1. CONSULT FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCH [MM]



TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ±-
 1 PLC ±-
 2 PLC ±-
 3 PLC ±.025
 4 PLC ±-
 ANGLES ±-
 MATERIAL FINISH

MATERIAL
-

DWN 08FEB2006
 R. MESSENGER
 CHK 25OCT2010
 R. MESSENGER
 APVD 10NOV2010
 S. BEARD
 PRODUCT SPEC 108-151015
 APPLICATION SPEC 114-151015
 WEIGHT 43.4 g
 CUSTOMER DRAWING



NAME
 PLUG CONNECTOR 18-6 ARRANGEMENT
 HDP20 SERIES -C030 MOD

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	©-HDP26-18-6PSX-C030	-

SCALE 1.000 SHEET 1 OF 1 REV A2