


P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	04AUG2021	GSK	WW

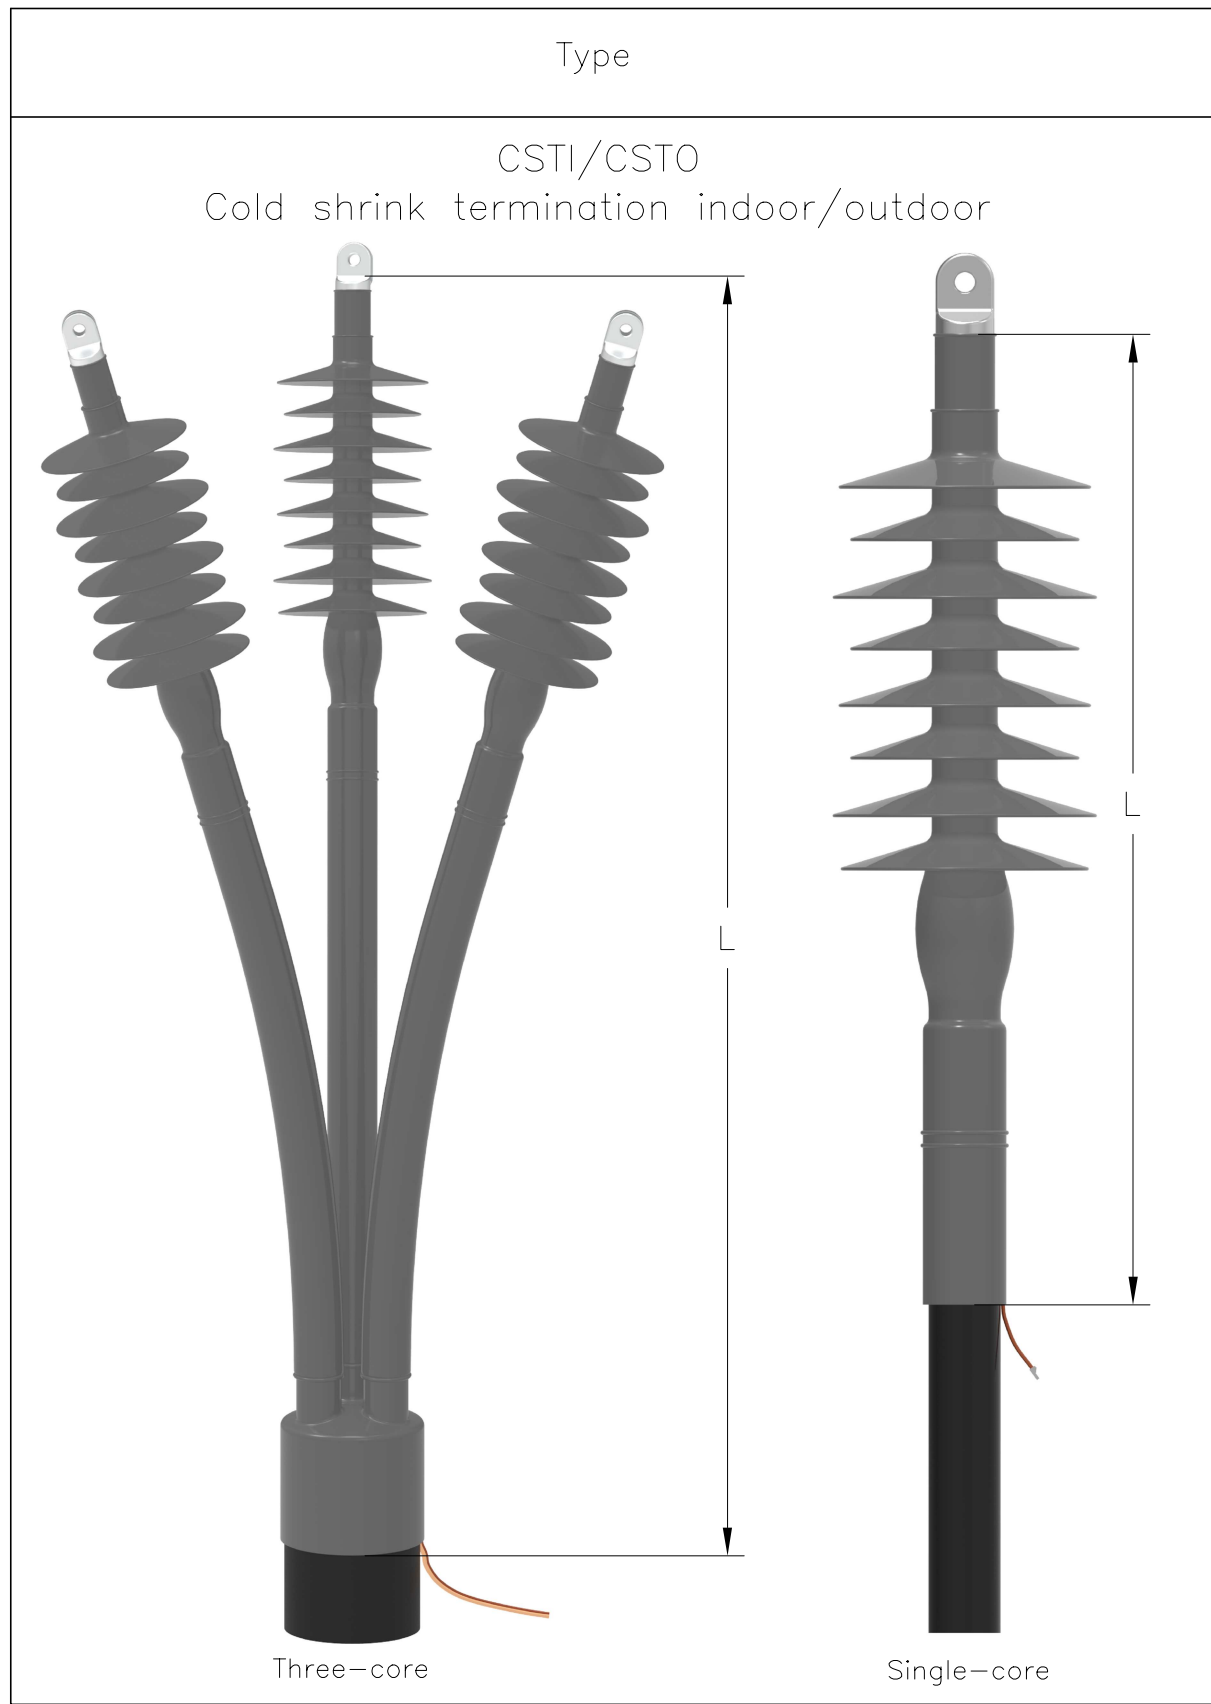

Type	Voltage class	Application	Material	L* approx. (mm)
CSTI/CSTO Cold shrink termination indoor/outdoor	10 kV	Indoor Single-core	CSTI-10-2535-SC-T	450
			CSTI-10-5015-SC-T	
			CSTI-10-1840-SC-T	
		Outdoor Single-core	CSTI-10-4063-SC-T	450
			CSTO-10-2535-SC-T	
			CSTO-10-5015-SC-T	
	10 kV	Indoor Three-core	CSTO-10-1840-SC-T	1000
			CSTO-10-4063-SC-T	
			CSTI-10-2535-T	
			CSTI-10-5015-T	
		Outdoor Three-core	CSTI-10-1840-T	1000
			CSTI-10-4050-T	
CSTO-10-2535-T				
CSTO-10-5015-T				
27.5 kV	Indoor Single-core	CSTO-10-1840-T	1000	
		CSTO-10-4050-T		
		CSTI-27.5-150-SC		
		CSTI-27.5-185-SC		
		CSTI-27.5-240-SC		
	Outdoor Single-core	CSTI-27.5-300-SC	1000	
		CSTI-27.5-400-SC		
		CSTO-27.5-150-SC		
		CSTO-27.5-185-SC		
		CSTO-27.5-240-SC		
CSTO-27.5-300-SC				
CSTO-27.5-400-SC				

Three-core

Single-core

*Variations possible depending on cable dimensions and cable lug configuration.
 Single-core including 1 termination + core protection tube
 Three-core including 3 terminations + core protection tube + breakout

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SATHISH KUMAR G 04AUG2021	TE Connectivity		
		CHK WEIJIA WANG 04AUG2021			
DIMENSIONS: mm		APVD WEIJIA WANG 04AUG2021	NAME MV cold shrink terminations CSTI/CSTO		
		PRODUCT SPEC —	RESTRICTED TO —		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO G=MVCA_CSTIO_CN
MATERIAL —		WEIGHT —	CUSTOMER DRAWING		
		SCALE NTS	SHEET 1 OF 1	REV 1	