
	REVISION								
REV	DESCRIPTION	DATE	APPROVED						
D1	CORRECT TYPO NOTE 1, SEE ECO-20-001092	1/23/2020	I.MYONG						

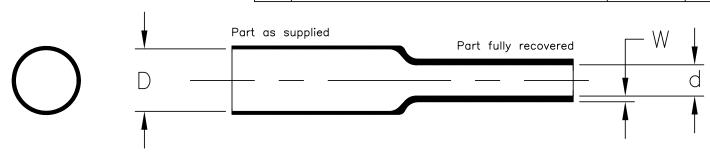

As Supplied			As Recovered							
			Inside Diameter 'd'							
Size	Minimum		Maximum		Minimum		Maximum		Nominal	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/8	.125	3.18	.061	1.55	.019	0.48	.035	0.91	.027	0.69
3/16	.187	4.75	.100	2.54	.023	0.58	.043	1.09	.033	0.83
1/4	.250	6.35	.143	3.63	.025	0.63	.045	1.14	.035	0.89
3/8	.375	9.52	.214	5.45	.030	0.76	.050	1.27	.040	1.01
1/2	.500	12.70	.286	7.25	.033	0.83	.063	1.60	.048	1.21
5/8	.625	15.87	.357	9.06	.037	0.93	.067	1.70	.052	1.32
3/4	.750	19.05	.428	10.88	.042	1.06	.072	1.82	.057	1.44
7/8	.875	22.22	.500	12.70	.050	1.27	.080	2.03	.065	1.65
1	1.000	25.40	.570	14.48	.050	1.27	.090	2.28	.070	1.77
1-1/4	1.250	31.75	.714	18.13	.067	1.70	.107	2.71	.087	2.20
1-1/2	1.500	38.10	.857	21.76	.075	1.90	.115	2.92	.095	2.41
1-3/4	1.750	44.45	.1000	25.40	.087	2.20	.127	3.22	.107	2.71
2	2.000	50.80	1.140	28.96	.090	2.28	.130	3.30	.110	2.79
3	3.000	76.20	1.710	43.43	.105	2.65	.145	3.67	.125	3.17
4	4.000	101.60	2.280	58.90	.120	3.04	.160	4.05	.140	3.55

NOTES

- 1. THIS PRODUCT IS DESIGNED FOR A WIDE RANGE OF APPLICATIONS AND MEETS THE REQUIREMENTS OF TE SPECIFICATION RT-510.
- 2. PACKAGED AND SUPPLIED ON A SPOOL. LABELED WITH PART NUMBER: NT= PRODUCT FAMILY, -3/8= ORDER SIZE, -0= BLACK (STANDARD COLOR). PACKAGING= -SP (SPOOL), Example: NT-3/8-0-SP.
- 3. ALWAYS ORDER THE LARGEST SIZE THAT WILL FIT SNUGGLY OVER THE COMPONENT TO BE COVERED.
- 4. FOR MATERIAL AND FINISH INFORMATION, REFER TO TE SPECIFICATION RT-510. FOR SPECIAL ORDER SIZES, CONTACT TE CONNECTIVITY.

 Raychem Harness & Components CUSTOMER DRAWING

-	Raychem Hamess & Components COSTOMER DRAWING								
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. AND INCH DIMENSIONS ARE IN SHOWN IN (PARENTHESES). $\begin{array}{cccccccccccccccccccccccccccccccccccc$			TE TE Connectivity					
	RESERVES T THIS DRA	CTIVITY CORPO THE RIGHT TO AWING AT ANY OULD EVALUAT	AMEND TIME.	TITLE: NT FLEXIBLE, FLAME RETARDED, MODIFIED ELASTOMER, HEAT—SHRINKABLE TUBING					
	SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.			DRAWING NO:					
ed.	DRAWN: 05Dec2019 G.ROSITANO	APPROVED: 12Dec2019 I.MYONG	CAGE CODE 06090	CAD FILE: NT_cd	SIZE: A	SCALE:	THIRD ANGLE PROJ.	SHEET: 1_OF_1	

© 2019-2020 TE Connectivity Corporation. All Rights reserved. | DRAWN: 05Dec2019 A G.ROSITANO