





REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE OF CD PER CO-19-013153	9/18/2019	I. MYONG
A1	CORRECTION OF NOTE 2 PER ECO-20-002058	2/12/2020	I. MYONG

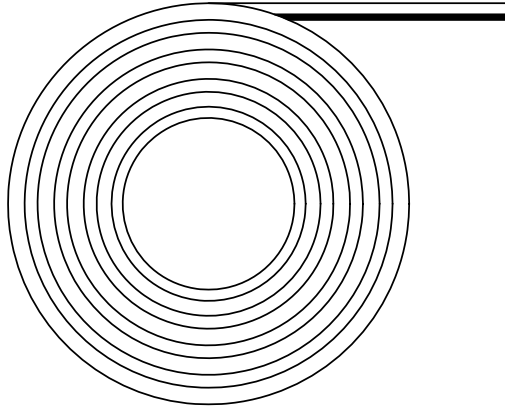

NOTES:

1. HIGH STRENGTH HOT-MELT ADHESIVE TAPE.
2. TEMPERATURE RANGE: -55°C to $+120^{\circ}\text{C}$
3. TAPE IS SUPPLIED ON 100 FOOT ROLL, 1" WIDE X .026" THICK X 100FT. TAPE IS ALSO AVAILABLE IN 1/2" AND 3/4" WIDTHS.
4. SPECIFICATIONS:
 RT-1050/3
 RT-6626 FOR /86 PRE-COAT
 VG95343 FOR /86 PRE-COAT ON -100 MOLDED PARTS
5. SDS DOCUMENTS:
 RAY 3143
6. SHELF LIFE:
 REFER TO TE SPEC SHEET No. 126-116006.

Raychem Harness & Components **CUSTOMER DRAWING**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. AND INCH DIMENSIONS ARE IN SHOWN IN (PARENTHESES).		 TE Connectivity	
DECIMALS:	.000 \pm 0.000 .00 \pm 0.00 .0 \pm 0.0		
TE CONNECTIVITY RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		TITLE: TE/Raychem HOT MELT ADHESIVE TAPE	
		DRAWING NO: S1048	
DRAWN: 31May2019 G.Rositano	APPROVED: 19JUL2019 I.Myong	CAGE CODE 06090	CAD FILE: S1048_cd
SIZE: A	SCALE: 	THIRD ANGLE PROJ. 	SHEET: 1_OF_1