THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -
© COPYRIGHT copyright_date BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	5	UPDATE THE MARKING	-	YQ	GREG
	6	UPDATE THE MARKING	-	YQ	GREG
	7	UPDATE THE MARKING	-	YQ	GREG
	8	REDRAWN IN CREO	23OCT2018	RS	KP

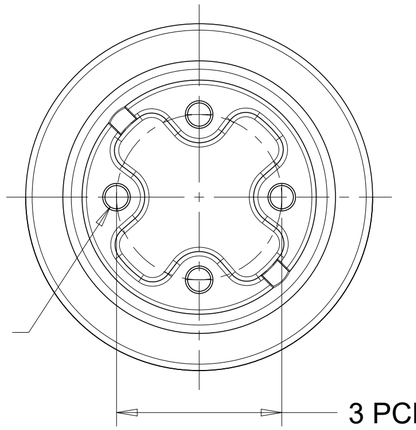

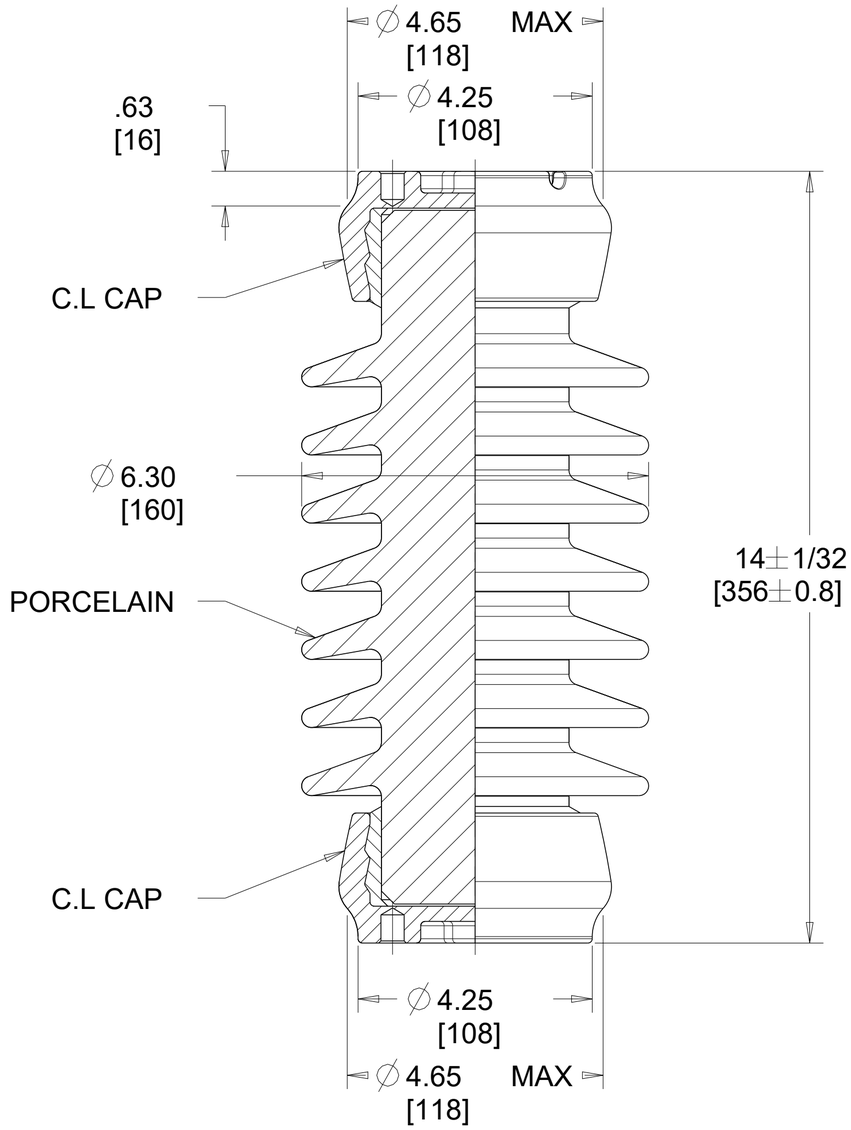

Notes:
1. All ferrous parts hot-dip galvanised to ASTM A153
2. Additional mark on porcelain: Batch traceability number
3. Reference standard ANSI C29.9 & CAN/CSA-C156.1-M86
4. Mark on porcelain:

TE
TR 208
Month Year

Mechanical Properties		
Units	English	Metric
Tensile Strength	10,000 lb	44.5 kN
Compression Strengh	10,000 lb	44.5 kN
Torsional Strength	8000 in-lb	904 N-m
Cantilever Strength	2000 lb	8.9 kN

Electrical Properties	
Impulse Withstand Voltage	150 kV
Wet p.f. Frequency Withstand	60 kV
Critical Impulse Flashover Voltage, Positive	170 kV
Radio-Influence Voltage	
Test Voltage to Ground	15 kV
Max RIV at 1000kHz	100 µV

Physical Properties		
Units	English	Metric
Nominal Creepage Distance	24 in	610 mm
Nett Weight	28.9 lb	13.1 Kg
Colour	Grey	

TE P/N: 926302-000

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: inch (mm)

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -

FINISH - -

DWN RAVI.S 23OCT2018
CHK K.PUSTHAY 23OCT2018
APVD K.PUSTHAY 23OCT2018
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -
CUSTOMER DRAWING

TE Connectivity

NAME PORCELAIN STATION POST INSULATOR, TR 208

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-SP-TR208PG	-

SCALE NTS | SHEET 1 OF 1 | REV 8