

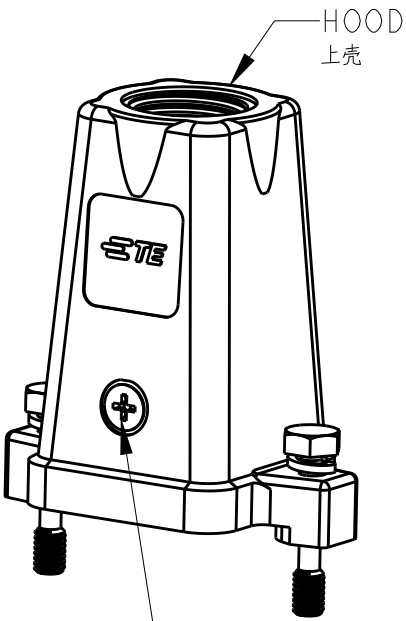


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	17APR2017	YC	CW

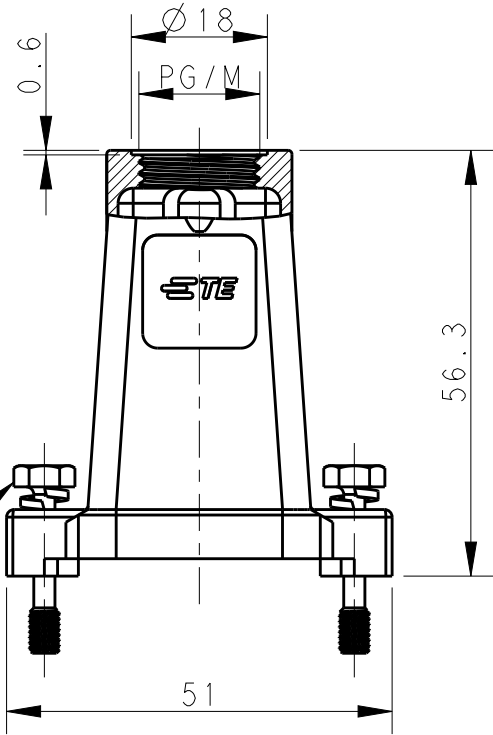

M3 SCREW
RECOMMENDED TIGHTENING
TORQUE 0.5N.m
M3 螺丝
推荐锁紧力矩0.5N.m

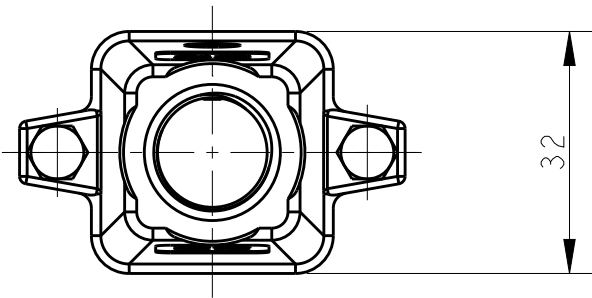


M4 SCREW
RECOMMENDED TIGHTENING
TORQUE 1.5N.m
M4 螺丝
推荐锁紧力矩1.5N.m

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: SEE TABLE
DEGREE OF PROTECTION: IP68 (MATED)

注释:
1. 技术参数:
上壳材料: 铝合金
表面处理: 见表格
防护等级: IP68(配合)

T1926030116-009	H3APR-TGC-MI6-EMC-C	H3APR HOOD,CENTER LOCKING,TOP ENTRY MI6, POWDER COATED,BLACK H3APR 上壳,中部锁定,顶出MI6,黑色粉末喷涂	MI6X1.5
PART NUMBER 料号	PART DESCRIPTION 描述		THREAD PG/M 螺纹 PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YORK CHEN 17APR2017	 TE Connectivity					
		CHK GINO YAO 17APR2017						
DIMENSIONS: mm		APVD CHRIS WANG 17APR2017	NAME H3APR-TGC-PG/M-EMC-C					
		PRODUCT SPEC 108-137187	SIZE A300779					
		APPLICATION SPEC 114-137187					DRAWING NO C-T192603X1XX009	
		WEIGHT -					RESTRICTED TO -	
MATERIAL - -		FINISH - -	CUSTOMER DRAWING					
			SCALE 1:1		SHEET 1 OF 1	REV A		