

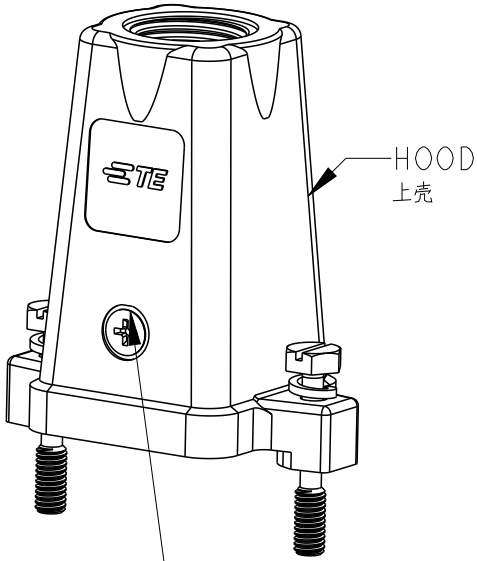


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	20
© COPYRIGHT 20	BY -	ALL RIGHTS RESERVED.	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	17APR2017	YC	CW
	A1	ECR-23-193742	06DEC2023	QY	CW

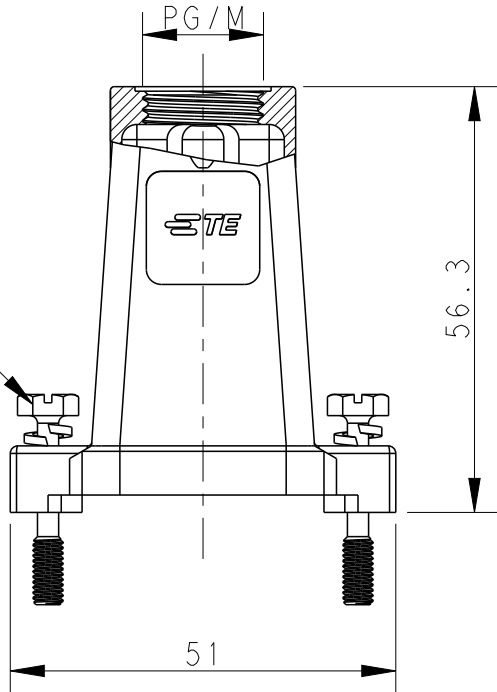

M3 SCREW
RECOMMENDED TIGHTENING
TORQUE 0.5N.m
M3 螺丝
推荐锁紧力矩0.5N.m

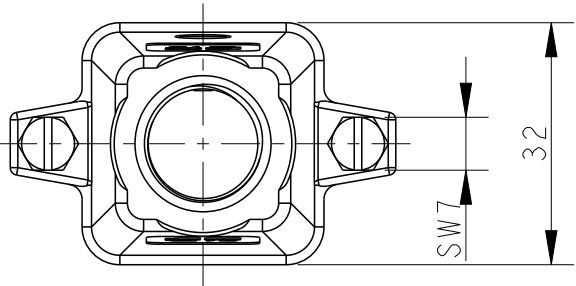


M4 SCREW
RECOMMENDED TIGHTENING
TORQUE 1.5N.m
M4 螺丝
推荐锁紧力矩1.5N.m

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: SEE TABLE
DEGREE OF PROTECTION: IP68 (MATED)

注释:
1. 技术参数:
上壳材料: 铝合金
表面处理: 见表格
防护等级: IP68(配合)

T1926032120-100	H3APR-TGC-M20-EMC	H3APR HOOD,CENTER LOCKING, TOP ENTRY M20, POWDER COATED, GRAY H3APR 上壳, 中部锁定, 顶出M20, 灰色粉末喷涂	M20X1.5
T1926032116-100	H3APR-TGC-M16-EMC	H3APR HOOD,CENTER LOCKING, TOP ENTRY M16, POWDER COATED, GRAY H3APR 上壳, 中部锁定, 顶出M16, 灰色粉末喷涂	M16X1.5
PART NUMBER 料号	PART DESCRIPTION 描述		THREAD PG/M 螺纹 PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 17APR2017 YORK CHEN	 TE Connectivity		
		CHK 17APR2017 GINO YAO			
DIMENSIONS: mm		APVD 17APR2017 CHRIS WANG	NAME H3APR-TGC-PG/M-EMC		
		PRODUCT SPEC 108-137295			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-137295	SIZE A3		
MATERIAL -		WEIGHT -	CAGE CODE 00779	DRAWING NO T192603X1XX100	RESTRICTED TO -
FINISH -		CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1
				REV A1	