

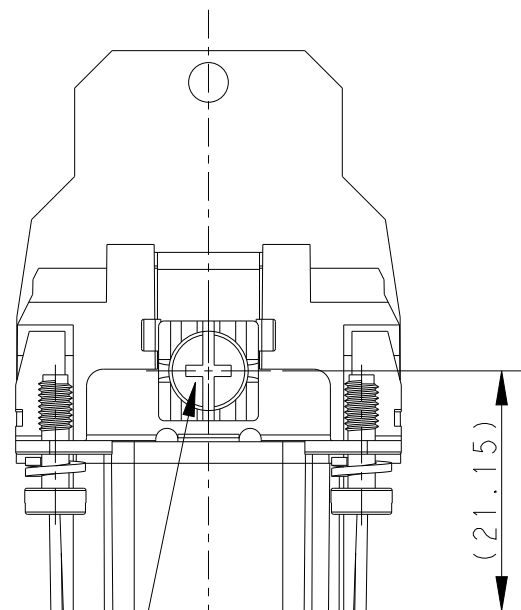
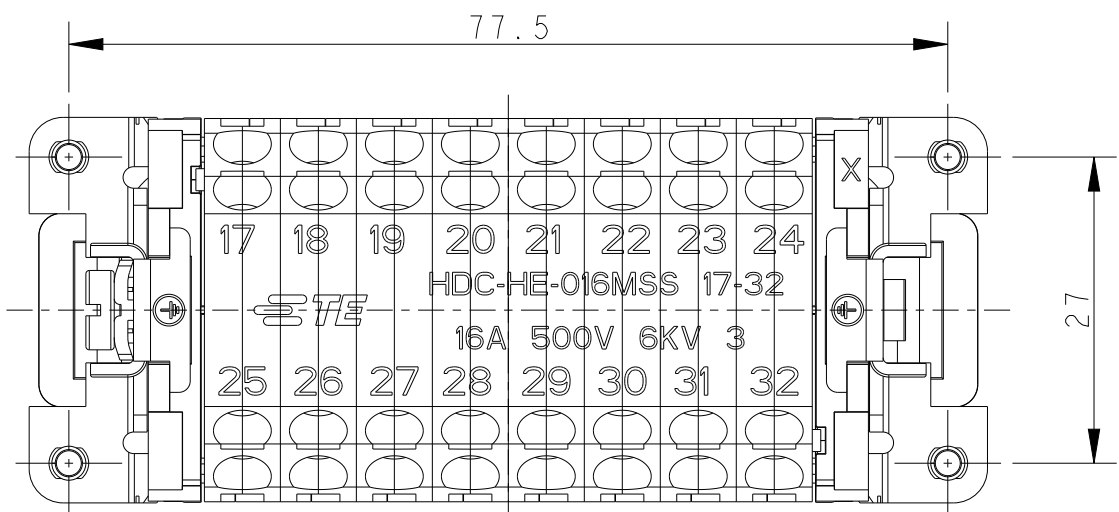


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	-
© COPYRIGHT copyright.d8Ye-	ALL RIGHTS RESERVED.	


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	28NOV2016	DW	CW
	B	ECR-21-106515	21JUL2021	SQ	CW

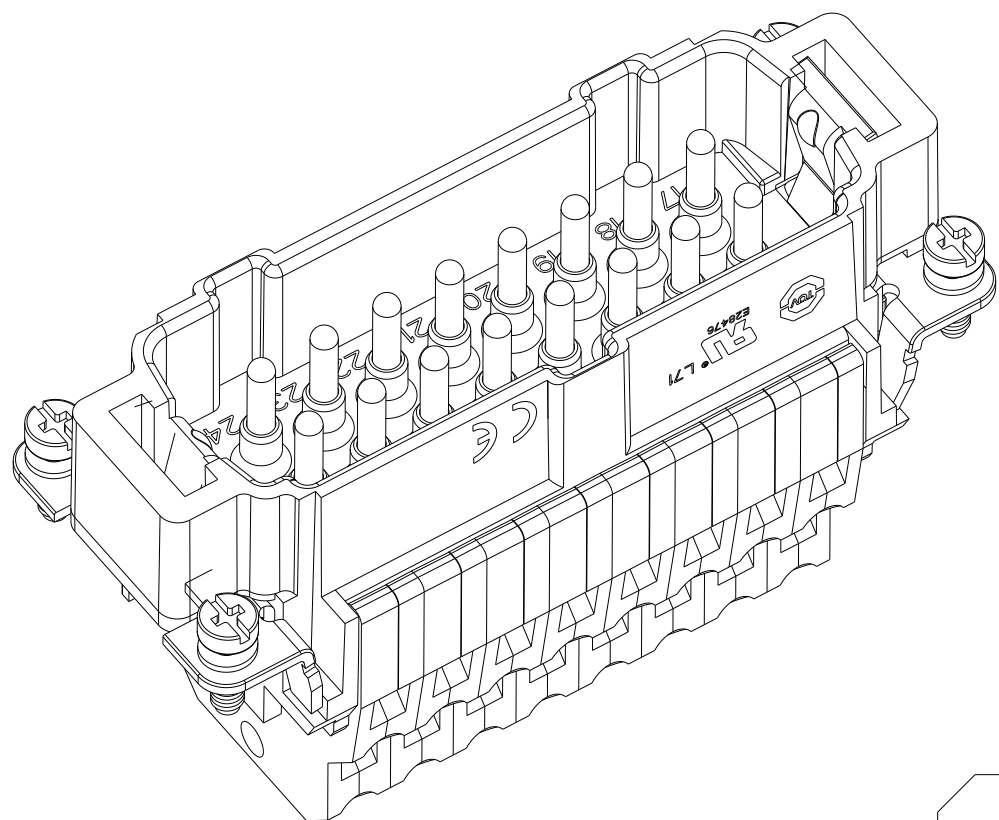


M4 SCREW, RECOMMENDED —
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐扭力矩为1.2Nm

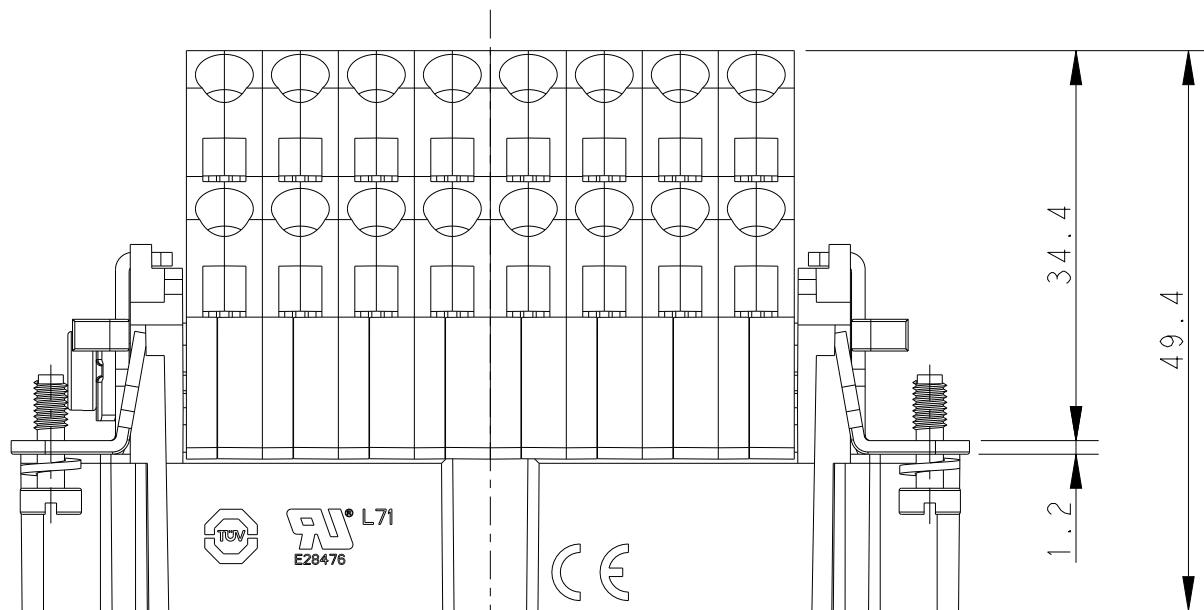


4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐扭力矩为0.5Nm

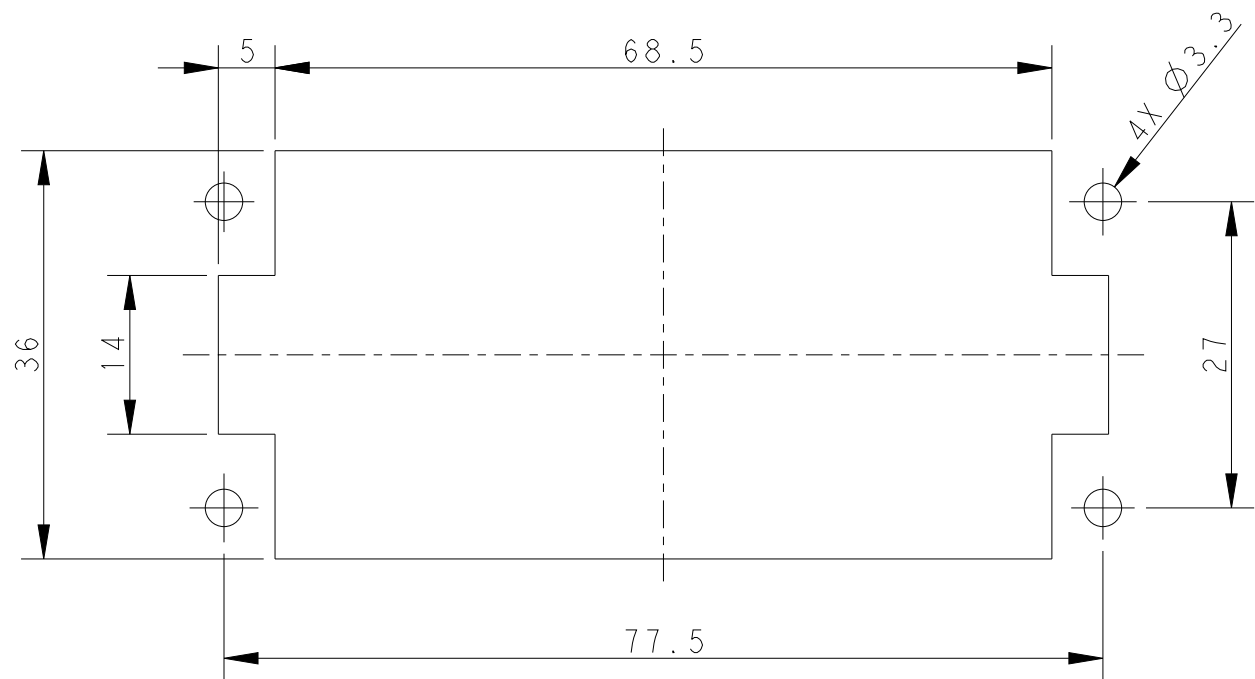

PANEL CUT OUT DIMENSION FOR INSERT
WITHOUT HOODS/HOUSING, ONLY FOR REFERENCE
不使用防护外壳时芯件的开孔安装尺寸, 仅供参考

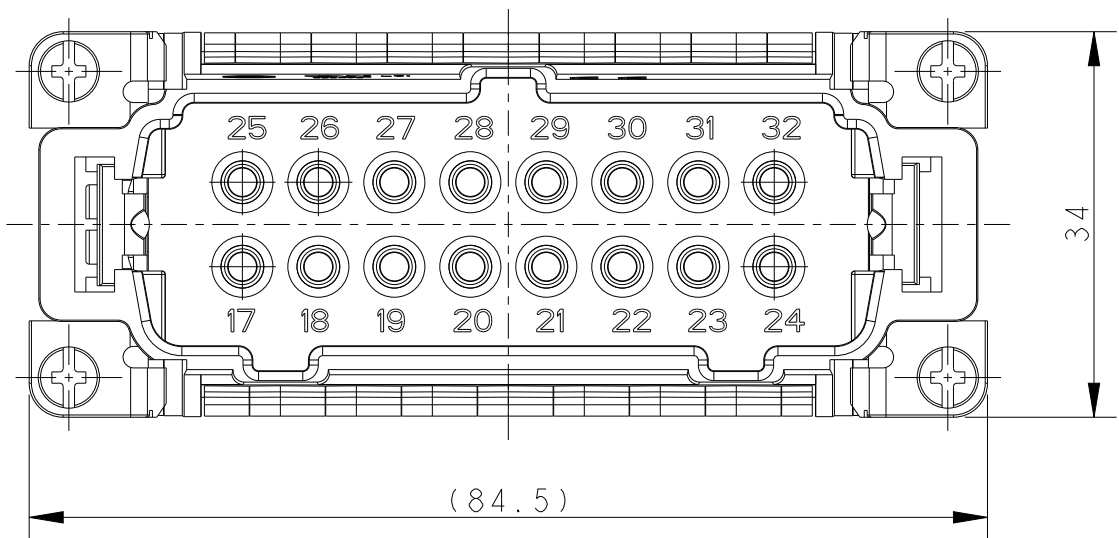

T2040325101-000		HE-016-MSS 17-32		HE-016 MALE INSERT, DOUBLE SPRING CLAMP 17-32 HE-016公插, 双弹片 17-32			
PART NUMBER 料号		PART DESCRIPTION 描述					
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 28NOV2016 DAVID WANG		 TE Connectivity			
		CHK 28NOV2016 CHRIS WANG					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HE-016-MSS 17-32			
		APVD 28NOV2016 XIANG XU					
		PRODUCT SPEC 108-137044					
		APPLICATION SPEC 114-137044					
MATERIAL -		FINISH -		SIZE A2	CAGE CODE -	DRAWING NO C=T2040325101000	RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 3:2		SHEET 1 OF 1	REV B