



SPECIFICATION CONTROL DRAWING

TECC0011C7

Issue 7  
12-Apr-21  
Page 1 of 2


COMMUNICATION CABLE - FOUR PAIR 24AWG S/FTP CAT7 LSZH

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of the referenced specifications. This document takes precedence over documents referenced herein.

PRODUCT DETAILS

DESCRIPTION		PHYSICAL CHARACTERISTICS	
Application:	100Base-T4, 100Base-TX, 100VG-AnyLAN, 1000Base-TX, 10 Gb Ethernet IEEE 802.3bt Types 1,2,3,4	<b>Structure</b>	Construction Number of Pairs
Rated temperature:	75°C	<b>Conductor</b>	AWG Conductor material Conductor dimension(mm)
Reference Standard:	61156-6,ISO/IEC 11801	<b>Insulation</b>	Insulation material Insulation dimension(mm) Nom. Thickness (mm)
Flammability Rating:	IEC 60332-3-25 & IEC 60332-1-2	<b>Cabling</b>	Twisting lay length Cabling lay length
Stranded Tinned Copper Conductor		<b>Filler</b>	Material
Colour-coded PE Insulation		<b>Binder</b>	Material
LSFRZH Jacket		<b>Shield</b>	Individual shield & material Primary overall shield & material Shield nom. Coverage Drainwire
Packaging: Per customer request		<b>Outer Jacket</b>	Outer jacket material Outer jacket Thickness (mm) Overall Nom Dimension (mm) Outer Jacket Rip cord Outer jacket Colour

CROSS SECTION

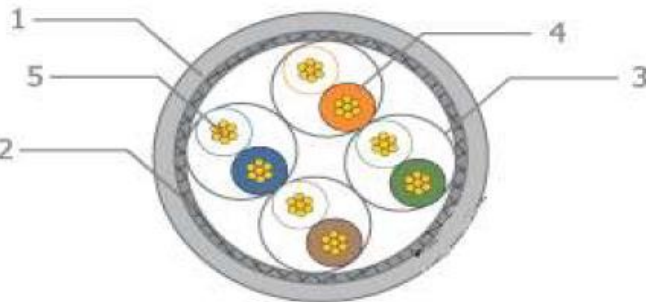

1	Jacket
2	Braid
3	AL-Foil
4	Insulation
5	Conductor

MECHANICAL CHARACTERISTICS

<b>Outer Jacket</b>	Operating Temp Range Bulk Cable weight Max. recommended pulling tension Min. bend radius (Install) Tensile strength Elongation Ageing condition After ageing, Tensile strength After ageing, Elongation Cold bend	-20°C to +75°C 70kg/km 80 N 8 x O.D. ≥9 Mpa ≥100% 100°C x 168hrs ≥70% of Unaging ≥50% of Unaging No cracks @ -20°C 4hrs
---------------------	--	--

ELECTRICAL CHARACTERISTICS

<b>Finished Cable</b>	Nom. mutual capacitance Pair to ground capacitance unbalanced Nominal velocity of propagation Max. delay skew Max. conductor DC resistance Max. Conductor resistance unbalance Min. insulation resistance Max. operating voltage - UL	≤ 5.6 nF/100m (@1kHz) ≤ 160 pF/100m 65% 25 ns/100m 145 Ω/km (@ 20 °C) 2% 5000 MΩ·km 300 V
-----------------------	--	--

JACKET MARK

"TE CONNECTIVITY - TECC0011C7 - 4PR 24AWG STRANDED CAT 7 CABLE - YEAR OF MANUFACTURE - BATCH NUMBER - METRE MARK"



SPECIFICATION CONTROL DRAWING

TECC0011C7

Issue 7  
12-Apr-21  
Page 2 of 2

COMMUNICATION CABLE - FOUR PAIR 24AWG S/FTP CAT7 LSZH

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of the referenced specifications. This document takes precedence over documents referenced herein.

ELECTRICAL CHARACTERISTICS CONTINUED

Frequency	Impedance Upper Limit	Impedance Lower Limit	ATT	RL	NEXT	PS NEXT	FEXT	PD
(MHz)	Zu (Ω)	Zl (Ω)	(Db/100m)	(dB Min)	(dB Min)	(dB Min)	(dB Min)	(ns/100m Max)
1	-	-	3.0	20.0	78.0	75.0	70.0	570.0
4	115.2	86.8	5.6	23.0	78.0	75.0	70.0	552.0
8	112.6	88.8	7.9	24.5	78.0	75.0	70.0	546.7
10	111.9	89.4	8.8	25.0	78.0	75.0	70.0	545.4
16	111.9	89.4	11.1	25.0	78.0	75.0	70.0	543.0
20	111.9	89.4	12.4	25.0	78.0	75.0	70.0	542.0
25	113.2	88.3	13.9	24.2	78.0	75.0	70.0	541.2
31.25	114.6	87.2	15.6	23.3	78.0	75.0	70.0	540.4
62.5	120.2	83.2	22.3	20.7	75.5	72.5	70.0	538.6
100	125.3	79.8	28.5	19.0	72.4	69.4	70.0	537.6
200	135.7	73.7	41.2	16.4	67.9	64.9	70.0	536.5
250	140.0	71.4	46.5	15.6	66.4	63.4	70.0	536.3
300	139.8	71.5	51.3	15.6	65.2	62.2	70.0	536.1
600	139.8	71.5	75.1	15.6	60.7	57.7	70.0	535.5

Remark : Cable that meet the requirements of the template are not required to be measured for return loss; alternately cables that meet the return loss requirements are not required to be measured for characteristic impedance.

**Mechanical performance Requirements for the tests for outer jacket.**

EN 45545 R15&R16 HL3	T09.01 EN 60332-1-2	Single vertical flame	IEC 60332-1-2
	T09.03 EN50305 (for	Bunched cable flame	IEC 60332-3-25
	T13 EN 61034-2	Smoke emission	≥ 70%
	T15 EN 50305	Toxicity index	ITC ≤ 6
Ozone resistan	(0.00015-0.00025%)(40±2)°C	No Crack	EN50305 7.4.2
Mineral oil resistance	IRM902/(25)°CX24h	Tensile strength Variation ≤ ±30%.	EN 60811-2-1 10
		Elongation at break Variation ≤ ±40%.	
Fuel resistance	IRM903/(25)°CX24h	Tensile strength Variation ≤ ±30%.	
		Elongation at break Variation ≤ ±40%.	
Cold bend	-(20±2)°C,8D	No Crack	EN 60811-1-4 8.1
Assessment of halogens	HCl and HBr	≤ 0.5%	EN50267-2-1
	pH	≥ 4.3	EN50267-2-2
	Conductivity	≤ 10µS/mm	

Approval

Electronic sign off - no signatures will appear.