


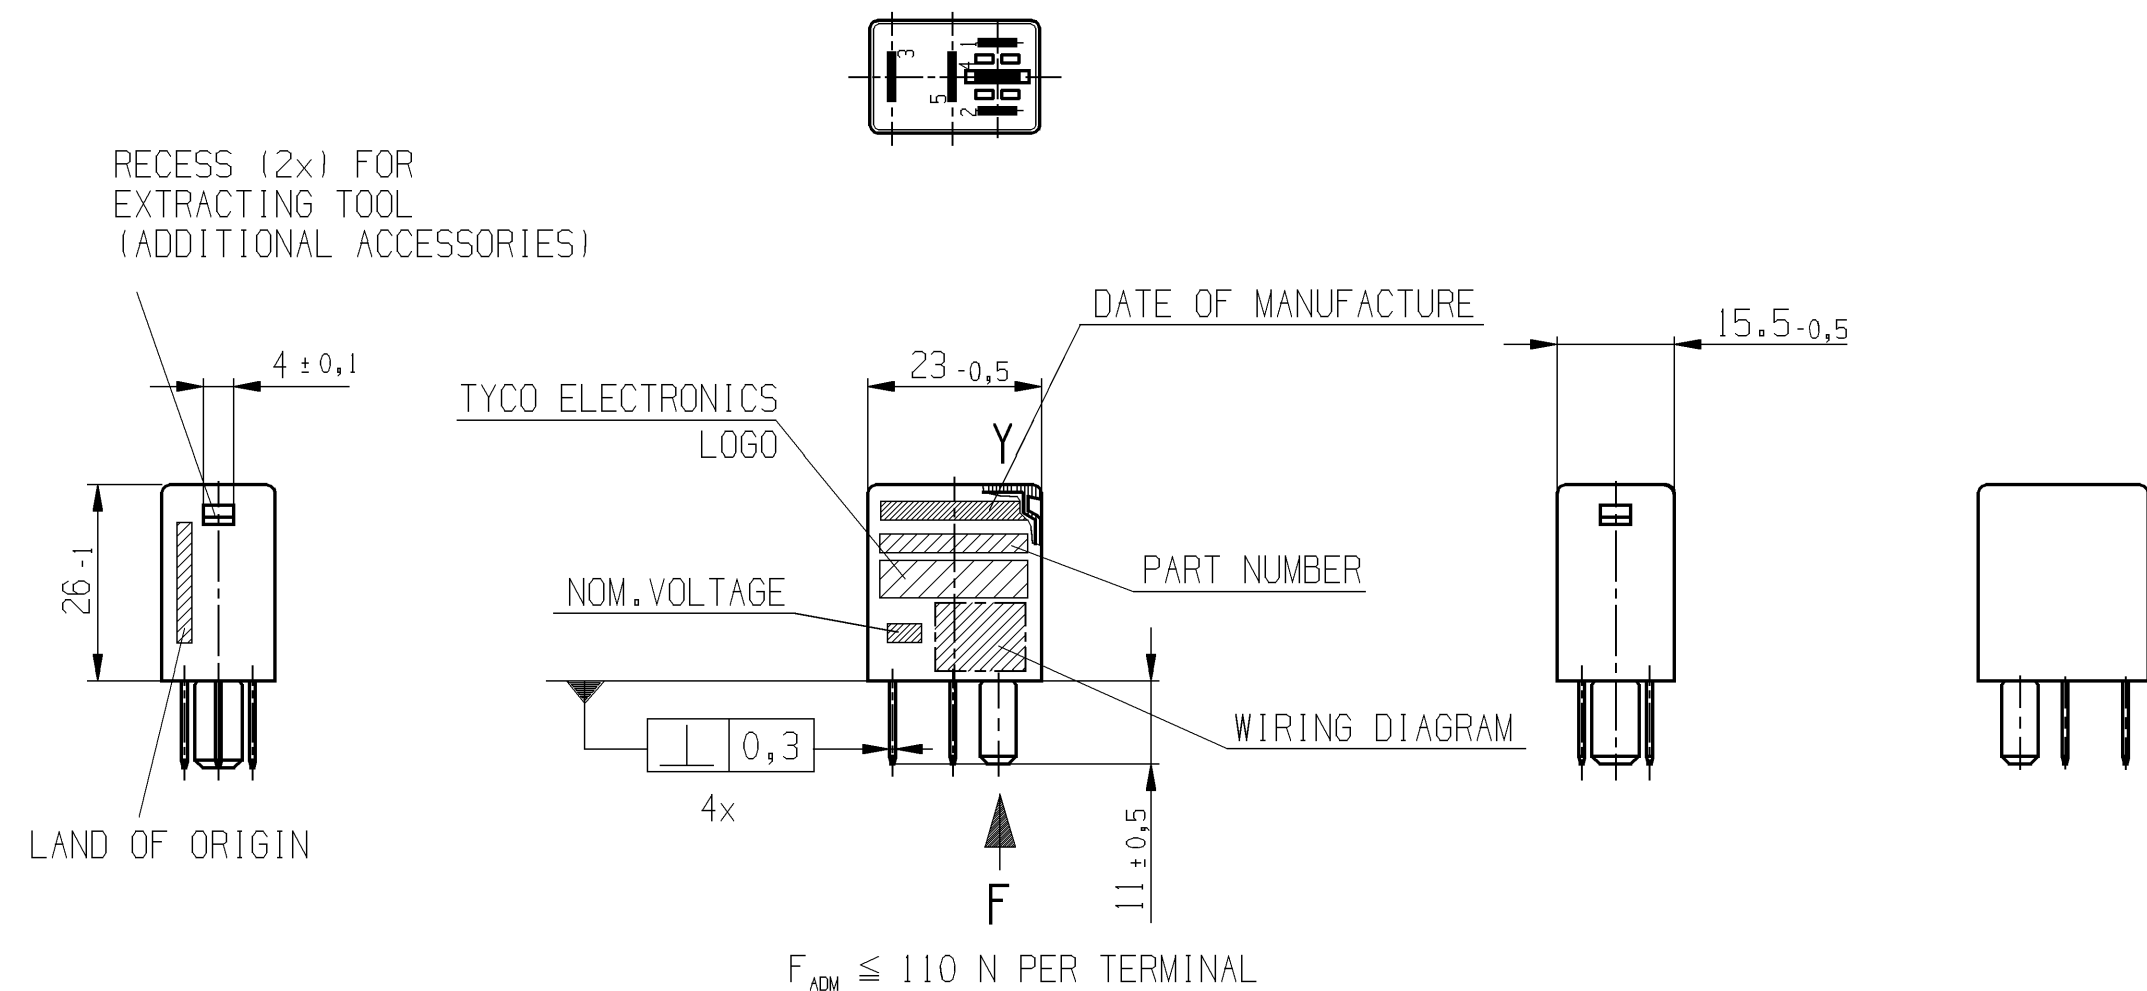


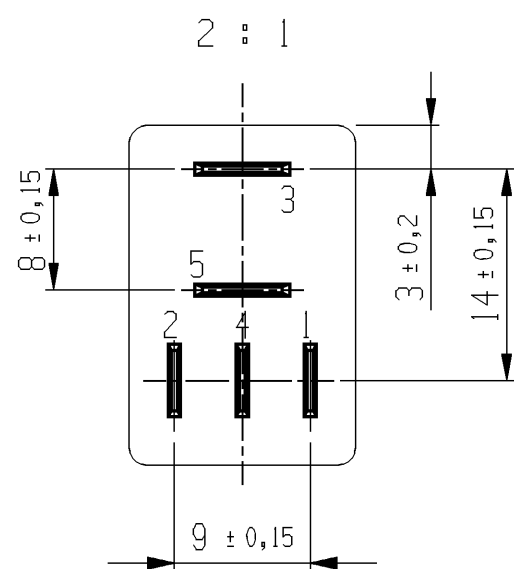

TERMINAL CONFIGURATION

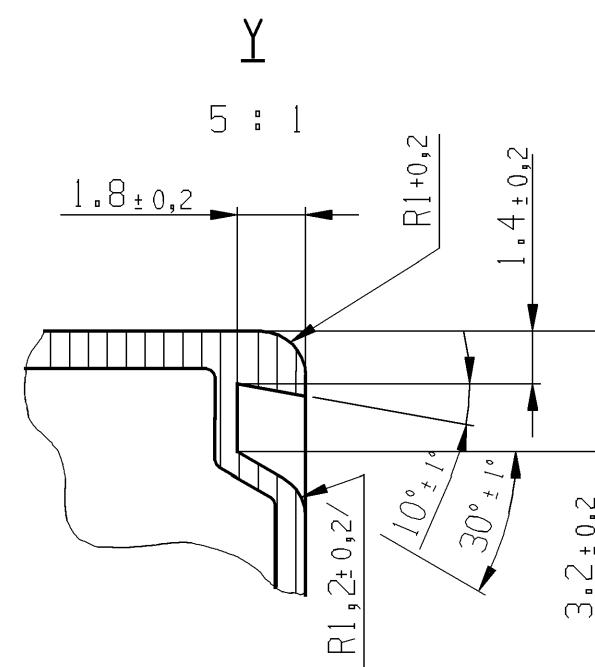

WIRING DIAGRAM



PART	MATERIAL	COLOUR
HOUSING	PBT 30 ± 10 [%] GF	GREY
BASE PLATE	PBT 30 ± 10 [%] GF	GREY

DEGREE OF PROTECTION ACC. TO IEC529 = DIN 40 050 Teil 9

TERMINALS IP 20
HOUSING IP 5K4
IN CONNECTION WITH A SOCKET HOUSING
MOUNTING POSITION: TERMINALS SHALL POINT DOWNWARDS
FOR ALL OTHER POSITIONS PROTECTION GROUP IP 20 IS VALID

OBSELETE BOSCH P/N	TE P/N	REV	PART NUMBER	CUSTOMER P/N	CODE NO
0 332 207 402	0-1904034-1		V23274-A2602-X018		
	1-1904034-1				
	2-1904034-1				
	3-1904034-1				
	4-1904034-1				
	5-1904034-1				
	6-1904034-1				
	8-1904034-1				
PROPRIETARY THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.			CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD		PAPER SIZE A2
APPLICABLE SPEC.:			FINISH		
			DIMENSIONS APPLY PLATING		
			SCALE	1:1; 2:1; 5:1	WEIGHT Ca. 23g
			MATERIAL		
			PART NAME		
			MICRO RELAY 2 CHANGEOVER 24V		
			PART NO.		
			V23274-A2602-X018-CD		
			SHT. 1 OF 2		
REV. CHANGE ORDER			DATE	APP.	

BLADE TERMINALS


1,2 : BLADE TERMINAL ISO 8092 4,8-0,8-CuZn, SILVER PLATED

4 : BLADE TERMINAL ISO 8092 4,8-0,8-Cu, SILVER PLATED

5 : BLADE TERMINAL ISO 8092 6,3-0,8-Cu, SILVER PLATED

3 : BLADE TERMINAL ISO 8092 6,3-0,8-St3 LG BK, TIN PLATED

CUT EDGES (TERMINAL 1, 2, 4, 5) WITHOUT SILVER PLATING ALLOWED

1	2	3	4	5	6	7	8	
A								A
B								B
C								C
D								D
E								E
F								F
Nominal voltage (load and excitation circuit)				24 V				
Permissible operating voltage				17...27 V				
Permissible ambient temperature				- 40...100 ° C				
Response voltage (at 20 ° C)				≤ 17 V				
Release voltage (at 20 ° C)				≥ 3 V				
Response time				≤ 10 ms				
Release time				≤ 15 ms				
Contact material				Silver based				
Equivalent coil resistance at terminal 1-2				410 ± 20 Ω				
Voltage drop at blade terminals at a measuring current of 5± 0.5 A								
Normally Open Contact Terminal 3-5								
In new condition				Typically ≤40mV, Max. 300mV				
After life test				Typically ≤75mV, Max. 300mV				
Normally Closed Contact Terminal 3-4								
In new condition				Typically ≤40mV, Max. 300mV				
After life test				Typically ≤150mV, Max. 300mV				
0102030405060708090100								
PROPRIETARY THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.					CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD		PAPER SIZE A3	
APPLICABLE SPEC.:					FINISH			
					DIMENSIONS APPLY PLATING			
				TOLERANCE UNLESS SPECIFIED OTHERWISE		SCALE	WEIGHT Ca. 23g	
					DIMENSIONS IN MM			
A6	INITIAL VERSION	2007-09-19	PTom	DWN.	2006-05-29	P. Tomas	PART NAME MICRO RELAY 2 CHANGEOVER 24V	
A5	---	2006-11-22	---	APP.				
A4	---	2006-09-28	---	REV.				
A3	---	2006-09-18	---	LOCATION	AMR PE EVORA			
A2	---	2006-09-11	---					
A1	---	2006-09-04	---					
A	---	2006-07-26	---				PART NO. V23274-A2602-X018-CD	
REV.	CHANGE ORDER	DATE	APP.				SHT. 2 OF 2	
1	2	3	4	5	6	7	8	